

FLEXEM——Resistive HMI 4000 Series

Module: FE4097X

Overview

- Metal enclosure, better heat dissipation and stronger anti-interference ability.
- Isolated power supply, Protected from thunderstrike and surging.
- The main board is treated with a special coating (three anti-paint) to adapt to harsh environment.
- High resolution, high brightness, LED backlight, More energy saving and environmental protection.
- Streamlined two-way communication port, the USB host port supports U disk to storage and download data.
- New configuration software, rich library, powerful features.
- 4-way serial port, with Ethernet port, more powerful expansion function.

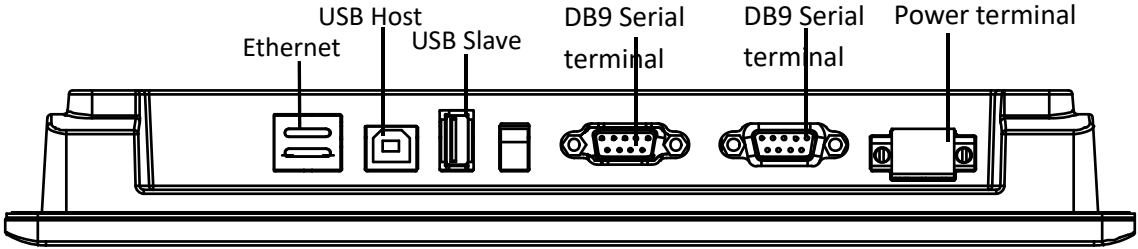

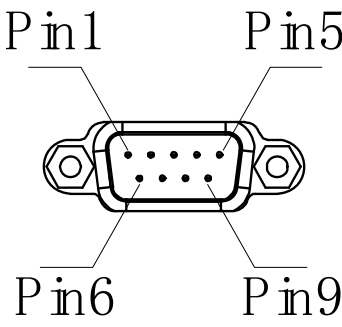
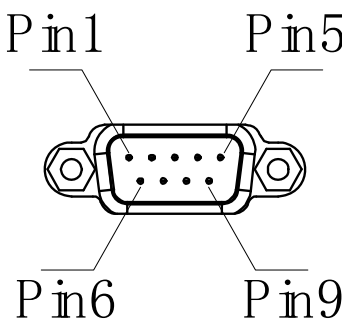



Appearance



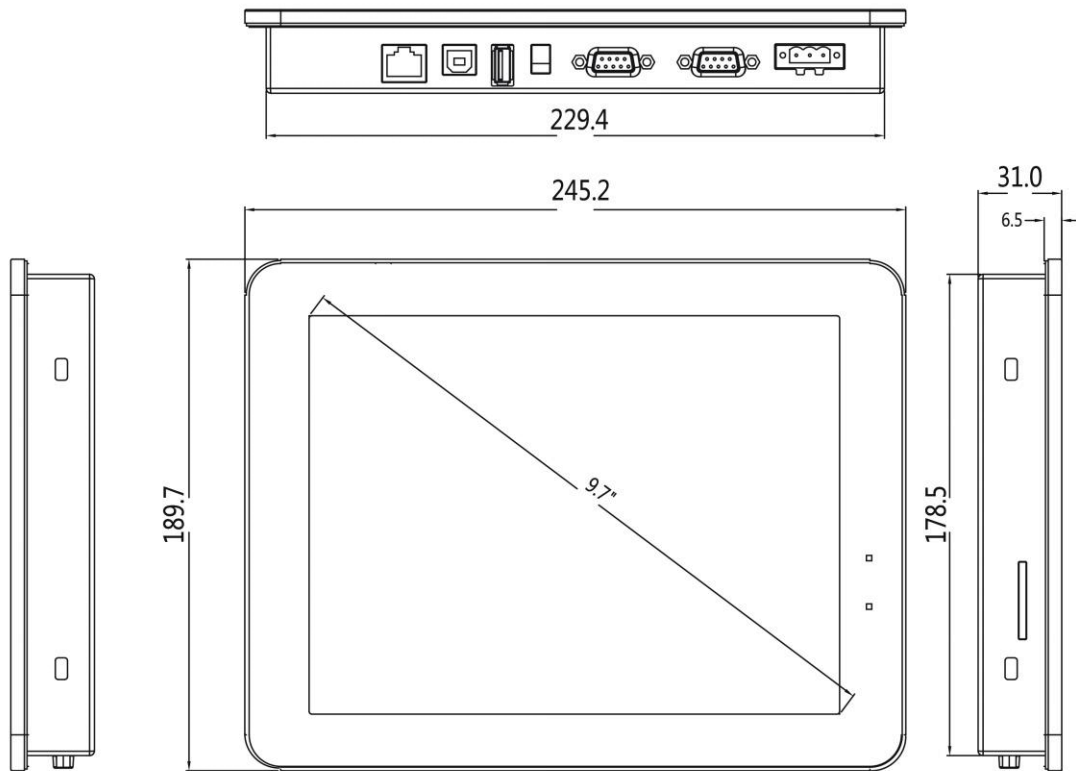
Specifications

Hardware parameter	Display	9.7" 4:3 TFT LCD
	Resolution(WxH)	1024×768
	Colors	16-bit
	Brightness	350 cd/m ²
	Backlight	LED
	LCD Life	50000 hours
	Touch Panel	4 wires resistive touch screen
	CPU	600MHz ARM Cortex-A8
	Memory	128M Flash + 128M DDR3
	RTC	Built in
	Ethernet	Available
	SD Card Port	10M/100M Adaptive Ethernet Port
	USB Port	USB Slave 2.0 Port*1, USB Host 2.0 Port*1
	Download Project	USB Slave/U-disk/Ethernet/SD-Disk
	COM Port	COM1/COM2: RS232/RS485/RS422 COM3/COM4: RS232
	LCD viewing angle (T/B/L/R)	85'/85'/85'/85'
Electrical Specifications	Power Consumption	< 10W
	Input Power	DC24V,working range DC 18V~28V
	Power Protection	Isolated power supply, Protected from thunder strike and surging
	Power Down Allowed	< 5mS
	CE & RoHS	Complied with EN61000-6-2:2005, EN61000-6-4:2007, RoHS, Surge Immunity:±1KV, EFT:±2KV,ESD:4KV, Air:8KV
Environment Specifications	Operating Temperature	-10~60°C
	Storage Temperature	-20~70°C
	Anti-UV	Not suitable to work in strong ultraviolet light (such as direct sunlight)
	Operating Humidity	10~90%RH(Non condensation)
	Vibration Endurance	10~25Hz(X,Y,Z direction 2G/30 minutes)
	Cooling	Natural air cooling
Mechanical Index	Degree of protection	Front IP65(with NEMA panel),Back IP20
	Enclosure	Aluminium alloy + galvanized sheet covering powder
	Panel Cutout (WxH)	232mm×182mm
	Dimension	245mm×190mm×31mm
	Weight	About 1200g

Specifications

		
Power terminal (Pin1~Pin3 from left to right)		
	Pin1	FG
	Pin2	0V
	Pin3	DC24V
DB9 Serial terminal (COM1/COM3)		
	Pin1	Rx-(B)
	Pin2	RxD (COM1 RS232)
	Pin3	TxD (COM1 RS232)
	Pin4	Tx-
	Pin5	GND
	Pin6	Rx+(A)
	Pin7	RxD (COM3 RS232)
	Pin8	TxD (COM3 RS232)
	Pin9	Tx+
DB9 Serial terminal (COM2/COM4)		
	Pin1	Rx-(B)
	Pin2	RxD (COM2 RS232)
	Pin3	TxD (COM2 RS232)
	Pin4	Tx-
	Pin5	GND
	Pin6	Rx+(A)
	Pin7	RxD (COM4 RS232)
	Pin8	TxD (COM4 RS232)
	Pin9	Tx+
USB Host		
	USB Type A	Used to connect U disk, scan code gun and other peripherals
USB Slave		
	MicroUSB	Used to download programs and debug
Ethernet Port		
	RJ45	Used for Ethernet setup with the controller or for connecting to a server

Size FE4097X



Panel Cutout (W*H): 232mm*182mm

Contact us

Shanghai (R&D Center)

Address: Floor 11, Block B, INNO Center,
No.298, Guoxia Road,
Yangpu District, Shanghai

Telephone: +86-21-68683993

Fax: +86-21-65107569

Suzhou

Address: Room 915, Ricky Building,
No.668,YutingAvenue,Suzhou
Industrial Park

Telephone: +86-512-69833996

Shenzhen (Factory)

Address: 5th Floor, NO.2 Building,
Lanyun Science Park, Tangtou
Road, Shiyan Town, Baoan
District, Shenzhen, China

Telephone: +86-755-27610682

Fax: +86-755-27629895

Wuxi

Address: Room 1603, Taihu
Mingzhu Development
Building, No. 1890 Taihu
West Road, Binhu
District, Wuxi City

Telephone: +86-18505101982

Beijing

Address: Room 2008, Building 1, No.
93 Jianguo Road, Chaoyang
District, Beijing (Wanda
Plaza)

Telephone: +86-10-58204608

Fax: +86-10-58204608

Hangzhou

Address: Floor 1, Unit LEO, Block 5,
Singapore Science Park,
Road 6th, Xiasha Economic
Development Zone,
Hangzhou