


Junction box

Mini 25-L

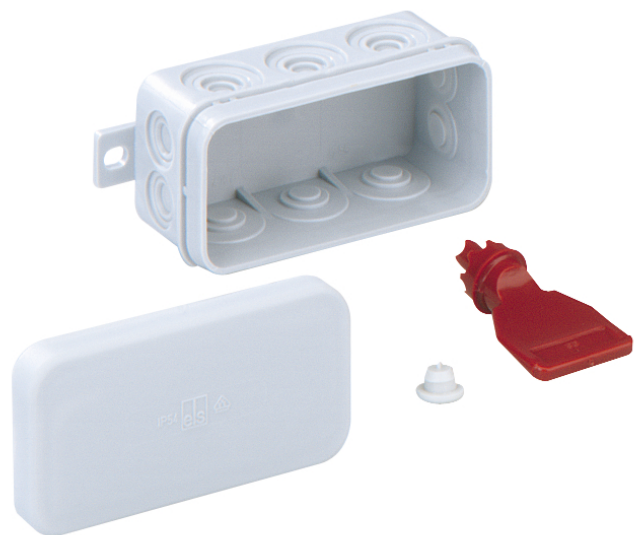

Mini 25-L

Junction box

Productnumber: 31090801

Dimensions: 89 x 43 x 38 mm

Junction box acc. to DIN EN 60670 (VDE 0606), 10 entries, 2 floor entries, suitable for confined installation environments such as suspended ceilings and cable ducts, complete with punching tool and blanking plug, with external fixing lugs

Grey, without terminals, for VDE approved single terminals



Technical Data

electrical characteristics

Protection type UL:	not specified
Rated insulation voltage AC:	400 V
Type of protection:	IP55
Circuit integrity class:	none
Max. conductor cross section:	2,5 mm²
Protection class:	II

Colours

Base unit colour:	grey
Cover colour:	grey

Dimensions

Length:	43 mm
Width:	89 mm

Dimensions

Height:	38 mm
---------	-------

Material characteristics

suitable for exterior use:	no
Burning behaviour in accordance with UL 94:	HB
Burning behaviour in accordance with VDE:	650
Halogen free:	yes
Industry quality:	no

mechanical properties

Type of fastening:	Wall/ceiling mounting
Sealable:	no
Impact strength:	IK07

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25
Max. ambient temperature:	40
24h ambient temperature:	35

Material

Base unit material:	Polyethylene
Cover material:	Polypropylene

Certificates

Test mark:	VDE
------------	-----

Accessories

VST RR - Sealing plugs

HandyGrip VG 20 - Terminal strip

HandyGrip VG 21 - Terminal strip

HandyGrip VG 21 w - Terminal strip

HandyQuick SQ 32 - Screwless terminal

HandyQuick SQ 52 - Screwless terminal