


TM/M

METAL PLUGS WITH PERMANENT MAGNET

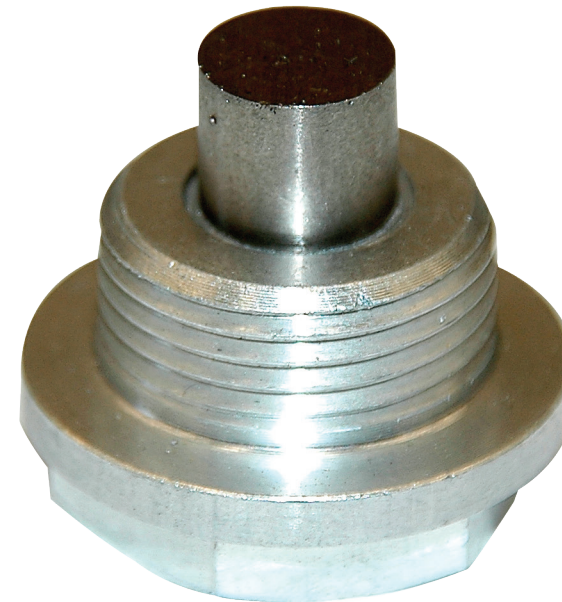

TM/M


METAL PLUGS WITH PERMANENT MAGNET



Consisting of a milled hexagonal head and crown in light aluminium alloy, the metal plug with magnet (which can also be used as a normal tank drain plug) can catch the metal particles present in the oil.

- Seal ensured by a gasket with oilproof plain washer.
- Permanent magnet in cobalt alloy.
- For adequate quantities they can be supplied with materials and special executions to customer design.

PERMANENT MAGNET

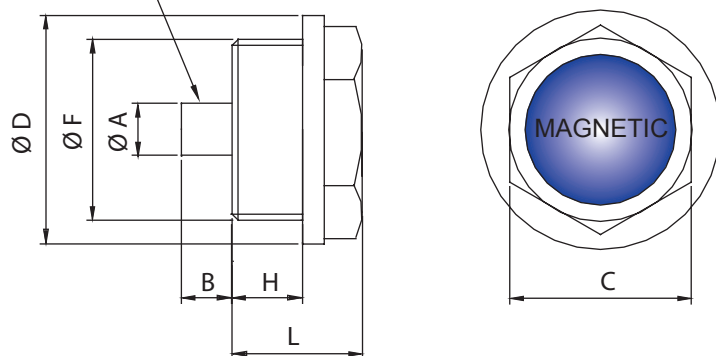

GAS TYPE	F	C	D	H	L	A	B
TM / M 1/4" GAS	1/4" GAS	17	20	9	16	6	6
TM / M 3/8" GAS	3/8" GAS	18	22	9	17	8	6
TM / M 1/2" GAS	1/2" GAS	22	28	9	17	10	8
TM / M 3/4" GAS	3/4" GAS	27	35	10	19	12	11
TM / M 1" GAS	1" GAS	34	42	12,5	23,5	17,5	7
METRIC TYPE	F	C	D	H	L	A	B
TM / M 14x1,5	M 14x1,5	17	20	9	17	6	6
TM / M 16x1,5	M 16x1,5	18	22	9	17	8	6
TM / M 18x1,5	M 18x1,5	20	26	9	17	8	6
TM / M 20x1,5	M 20x1,5	22	28	9	17	10	8
TM / M 22x1,5	M 22x1,5	22	28	9	17	10	8