


Stationary concrete pump

BSA 14000 HP E

Output up to 74 m³/h
Delivery pressure up to 220 bar

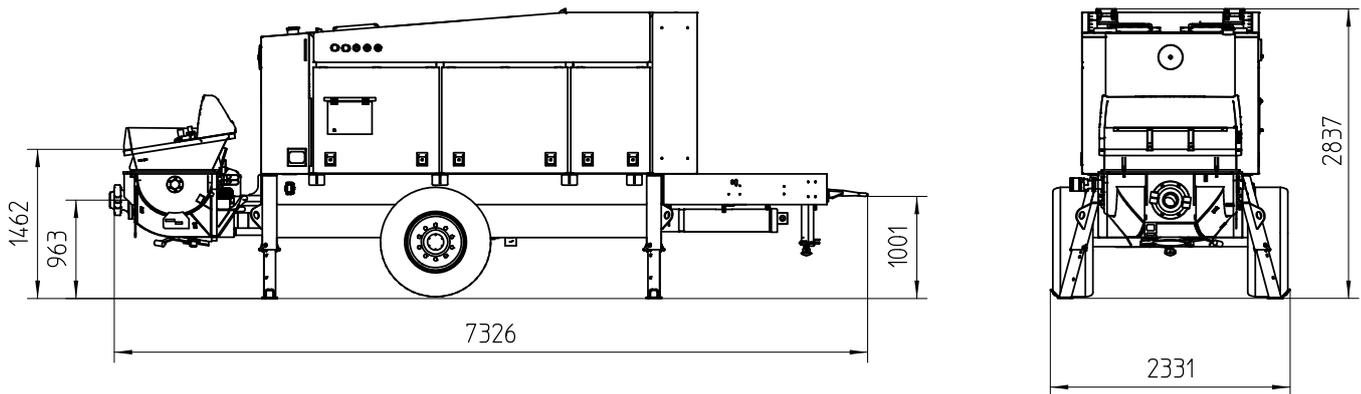

Note: Standard version BSA 14000 HP E. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 14000 HP E
Material number	m ³ /h	102478.000
Output	m ³ /h	74 / 50 *
Delivery pressure	bar	150 / 220 *
Delivery cylinder	Ø mm	200
Delivery cyl. stroke	mm	2100
Strokes / minute		19 / 13 *
Engine power	kW	320 (2 x 160)
Hopper		RS 905 HPF
Capacity	l	600
Filling height	m	approx. 1.5
Transfer tube		S 1812 D
Line connection	mm	ZX 125
Pressure connection	"	8
Control system		EPS FFH
Weight	kg	10,500

* Values for hydraulic fluid being fed to piston-side
All data maximum theoretical

Serial equipment

Agitator safety switch off	Electronic error management
Balloon tyres incl. transport protection	Ergonic Graphic Display (EGD)
Cable remote control 10 m	Flushing water pump 160 l/min 25 bar
Central lubrication on hopper, electrical	Gate valve connection
Cleaning accessories	Grill 60 mm
Coloring: Pump, frame, roof and tank anthracite grey; cover chrome yellow	Hard metal wear parts
Concrete hopper with agitator	Operating manuals (1 × paper, 1 × CD-ROM) spare part list
Concrete output adjust, electrically	Pump flow meter
Concrete pressure adjust, electrically	Set-up foot hydraulically
Coupling ring (DIN)	Splash guard
Drive electric, 2 x 160 kW	Square outriggers 4 × mech.
	Tool set incl. standard equipment
	Trailer F8, can be driven on job site

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.