

CD12M/0B-050C5

connectors





Micro Detectors

Italian Sensors Technology



Indicative image

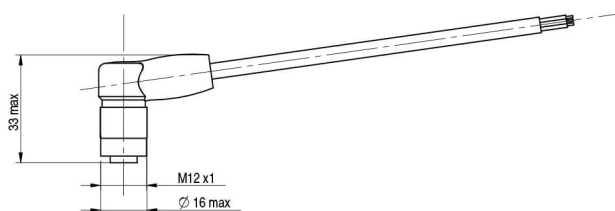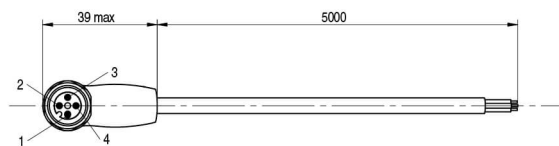

Electrical data

Nominal current	4 A
Led	No
Wires	4
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Connections	With open ended wires
Tightening torque	0,6 Nm
Operating temperature	-5°C...+80°C (flexible installation) -20°C...+80°C (fixed installation)
Lenght (m)	5
Head type	90°
Plug	M12
Outer diameter	Ø 4,7 mm ± 5%
Jacket material	PUR

Wire isolation

PVC

Conductors section

0,25 mm² (32 x 0,10 mm²)

Model

Femmina

Test/Approvals

Degree of protection

IEC IP67

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

BN/1

WH/2

BU/3

BK/4

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

18/11/2020 11:41:46