

# SSG/CP-0E

cylindrical photosensors



Micro Detectors

Italian Sensors Technology



Indicative image



## Detection properties

Nominal sensing distance	8m
Thermal drift of Sr	≤10% Sr
Repeat Accuracy	5%
minimum detectable object	Ø 4mm
Sensitivity adjustment	No

## Application

Function Principle	Receiver
Emitter/Receiver	Receiver
Optic position	Axial

## Outputs

Output type	PNP
-------------	-----

Output Function	NC
Switching frequency	250Hz

## Electrical data

Operating Voltage	10...30Vdc
No-Load supply current	≤20mA
Load current	≤100mA
Leakage current	≤10μA
Output voltage drop	2,5V max. IL =100 mA
Max ripple content	10%
LED indicators	Yellow (output state)
Time delay before availability	≤200ms
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	Red (660nm)
Interference to external light	5000lux (incandescent lamp), 10000lux (sunlight)
Impulsive Overvoltage Protection	Yes

## Mechanical data

Dimensions	M18 x 1 / L =78mm
Weight	30g
Housing Material	PBT / PC plug
Connections	M12 plug
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (Without freeze)
Diameter/Dimension	M18

## Test/Approvals


Approvals	CE, cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

## Accessories

Supplied Accessories	nuts M18 x 1, screwdriver
----------------------	---------------------------


# ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---

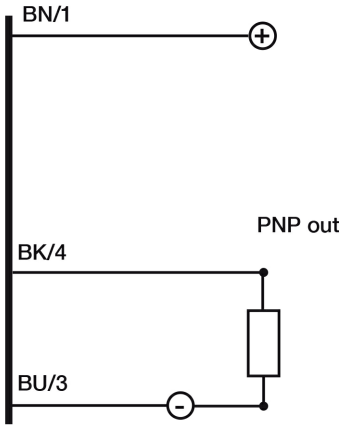

## CONNECTOR

---

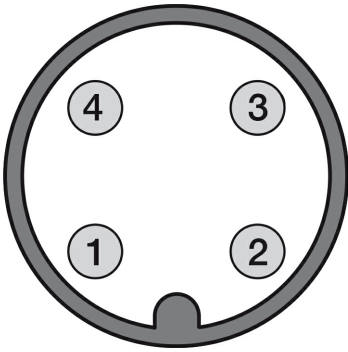

---

**M.D. Micro Detectors S.p.A.**

Strada S. Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

**date of printing**

20/11/2020 16:15:14