


# CD08/0B-050A5

connectors



Micro Detectors

Italian Sensors Technology

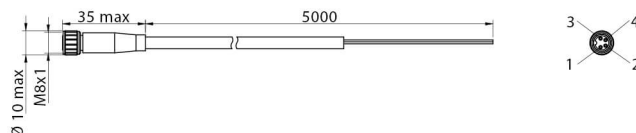

Indicative image

## Electrical data

Nominal current	4 A
Led	no
Wires	4
Rated impulse voltage	1,5 kV
Nominal voltage	Max. 60 V ac/dc

## Mechanical data

Tightening torque	0,4 Nm
Operating temperature	-5°C...+80°C (flexible installation) -30°C...+80°C (fixed installation)
Length (m)	5
Head type	Axial
Plug	M8
Outer diameter	Ø 4,7 mm ± 0,2mm
Jacket material	PUR
Wire isolation	PVC

Conductors section

0,25 mm<sup>2</sup>(32 x 0,10 mm<sup>2</sup>)

Model

Femmina

## Test/Approvals

Degree of protection

IEC IP67

---

# ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---

BN/1

WH/2

BU/3

BK/4

---

### **M.D.Micro Detectors S.p.A.**

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

### **date of printing**

01/12/2020 09:01:35