

CL08/0B-00A

connectors




Micro Detectors

Italian Sensors Technology



Indicative image

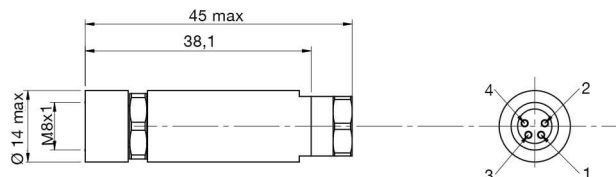

Application

Fixing

screw terminals

Electrical data

Rated current

a 40°C 4 A

Wires

4

Insulation resistance

$\geq 100 \text{ M}\Omega$

Contact resistance

$\leq 5 \text{ m}\Omega$

Rated voltage

60 V (3 plugs) 30 V (4 plugs)

Mechanical data

Connections

a vite

Tightening torque

0,2 Nm (M8 nut)

Operating temperature

-40 °C ... 85 °C

Head type

Axial

Plug

M8

Outer diameter

3,5 mm ... 5 mm

Stripping length of the sheath

12 mm

Jacket material

$\leq 5 \text{ m}\Omega$

Wire isolation

$\geq 100 \text{ M}\Omega$

Conductors section	0,14 mm ² ...0,5 mm ²
--------------------	---

Model	Female
-------	--------

Test/Approvals

Degree of protection	IP67
----------------------	------

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

01/12/2020 10:27:18