

Flow-rate
up to
85 l/min
(up to 22,4 gpm)



DISPENSERS

PUMPS

METERS

NOZZLE METERS

NOZZLE

SPECIAL EQUIPMENTS

FLUID MONITORING



HOSE REEL

FILTERING

ACCESSORIES



Bipump

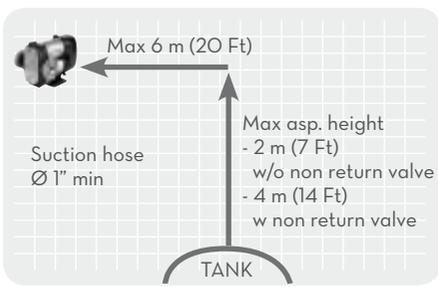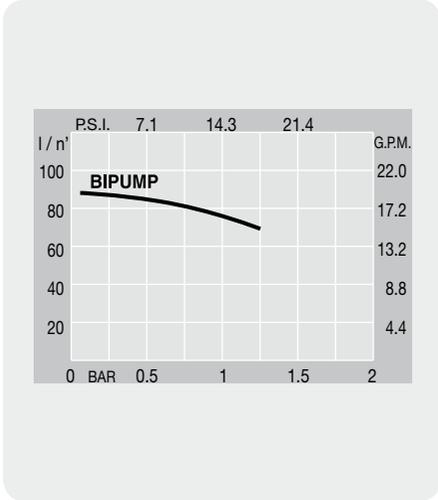

FEATURES



ON REQUEST



PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		Voltage			Duty cycle min.	rpm	Inletw BSP
			l/min	gpm	DC Volt	Power Watt	Amp. max.			
F00363A0A	Bipump 12V with on/off switch	D	85	22,4	12	500	42	30	2000	1"
F00363B0A	Bipump 24V with on/off switch	D	85	22,4	24	500	21	30	2000	1"
F0036301A	Bipump 12V with cable 2 m	D	85	22,4	12	500	42	30	2000	1"
F0036302A	Bipump 12V with cable 4 m	D	85	22,4	12	500	42	30	2000	1"
F0036303A	Bipump 24V with cable 2 m	D	85	22,4	24	500	21	30	2000	1"
F0036304A	Bipump 24V with cable 4 m	D	85	22,4	24	500	21	30	2000	1"
F0036321A	Bipump 12/24 without on/off switch	D	85	22,4	12/24	500/500	42/21	30/30	2000	1"
R14334000	Kit cable 2 m									
R14335000	Kit cable 4 m									
F14200000	Kit handle									