



VOLCANO

Water heater



SUPERB QUALITY SHAPE



01

VTS GROUP

- 1.1 VTS: number 1 in the world
- 1.2 3 pillars of success



02

VOLCANO

- 2.1 VOLCANO water heaters
Modernity
Innovativeness
Energy efficiency
- 2.2 Assembly
- 2.3 VOLCANO VR-D destratifier
- 2.4 Automation



03

TECHNICAL PARAMETERS

- 3.1 Device type series
- 3.2 Air speed in a distance function
- 3.3 Technical parameters
- 3.4 Pipeline parameters



04


FAQ

- 4.1 FAQ: devices

VTS GROUP – the manufacturer of technologically advanced devices for the HVAC industry, applying innovative technologies in the field of design research, production and logistics.

NO. 1 IN THE WORLD

24/7
IMMEDIATE AVAILABILITY

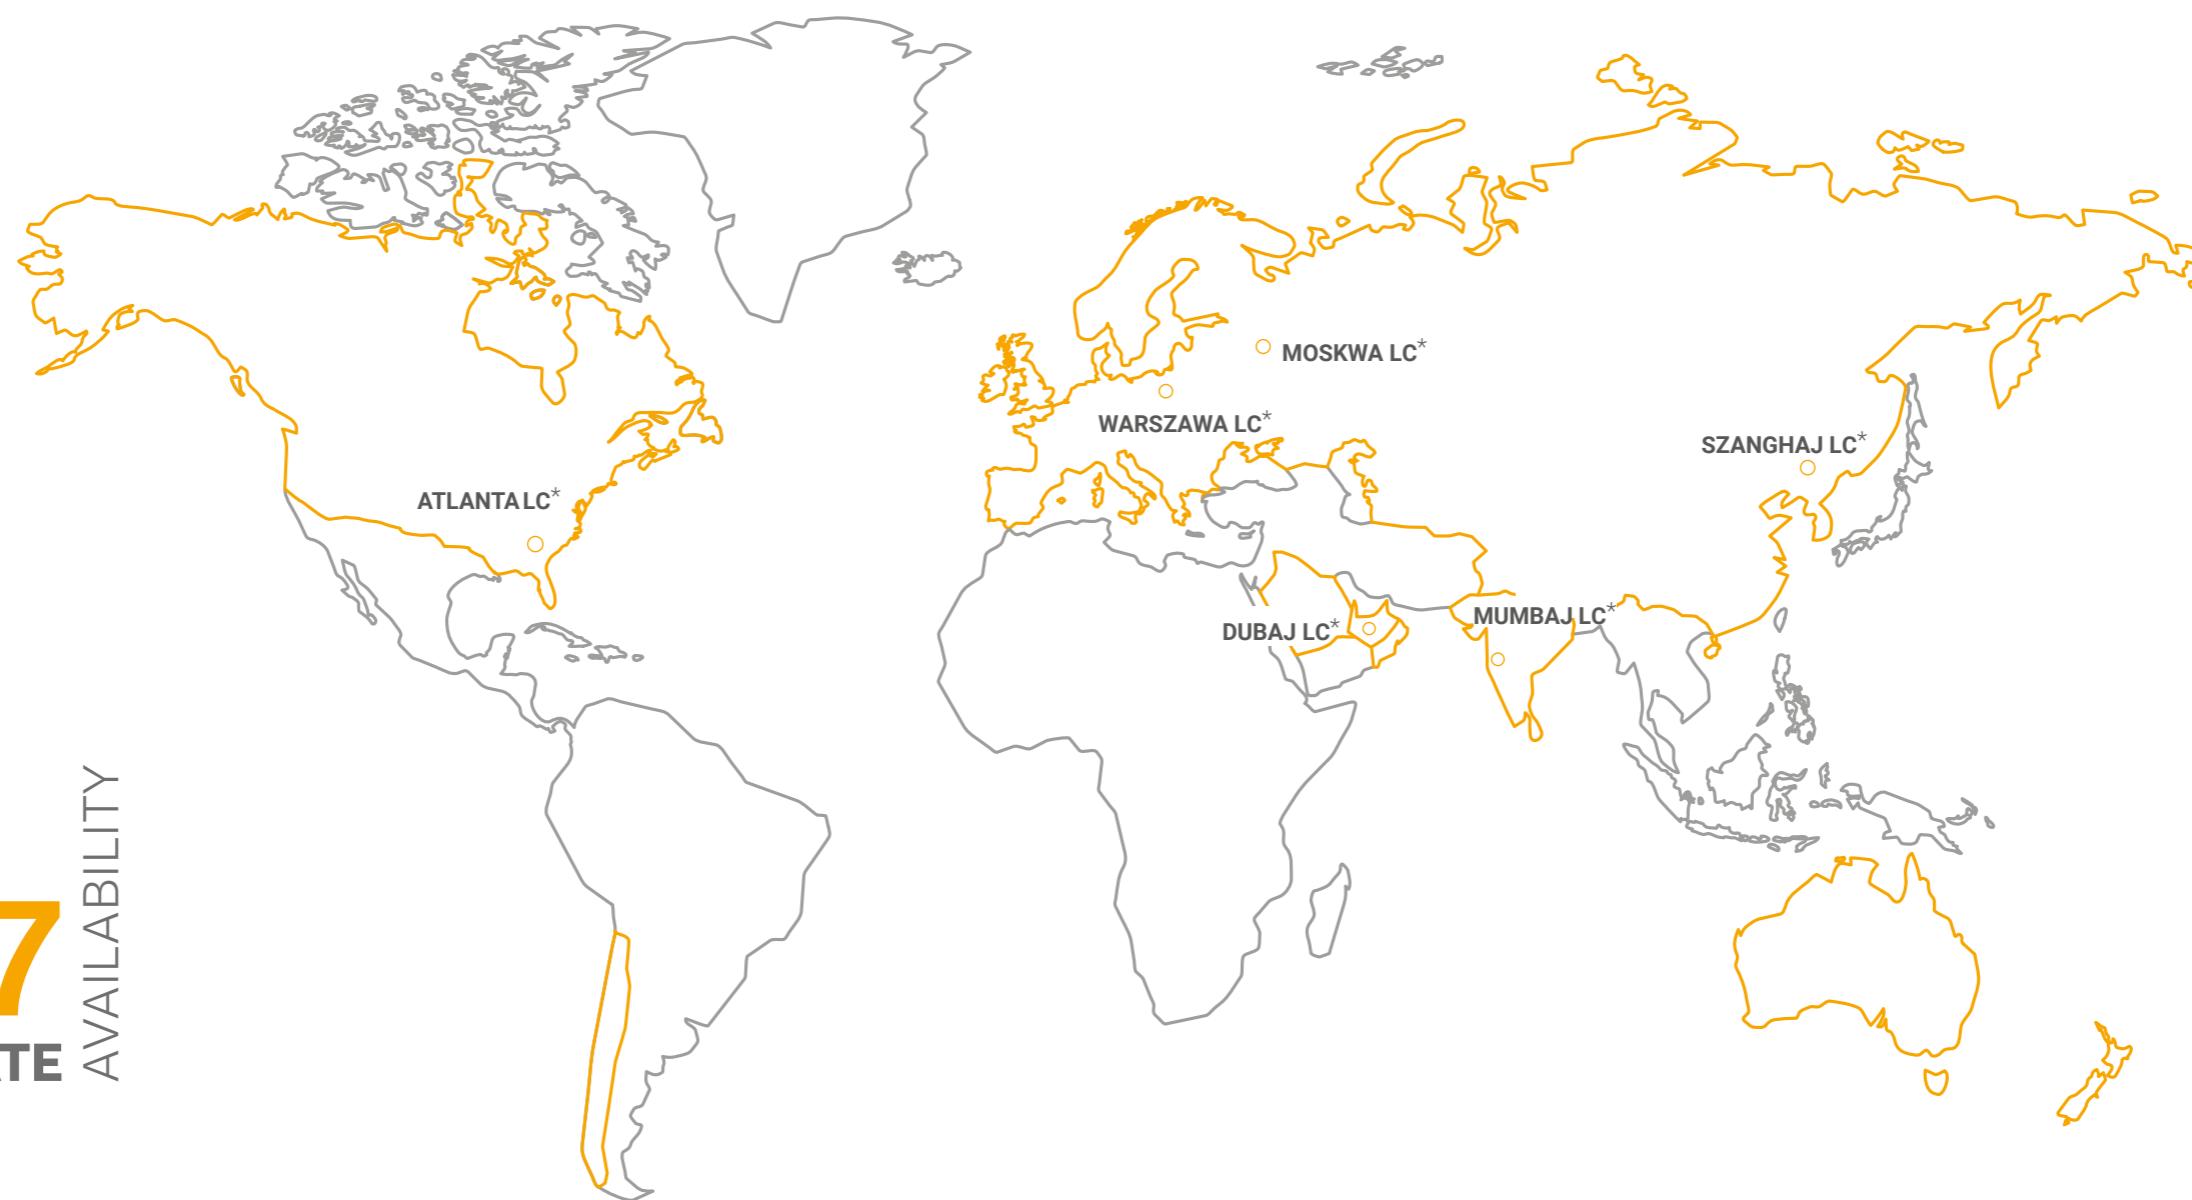

* Logistics center

** Ventus devices only





01

Grupa VTS

3 PILLARS OF SUCCESS

Unchangeably, the highest quality of products. The best prices on the market. The shortest delivery times. Thanks to these three pillars of our market policy VTS is always one step ahead, everywhere in the world.

Following the best world practices from the automotive industry, VTS has created a network of 6 efficient production & logistics centers (**Atlanta, Dubai, Moscow, Shanghai, Warsaw, Mumbai**) to guarantee the shortest delivery times on the market, regardless of your location.


Mass production scale of universally repeatable devices allows VTS to offer them **in the most competitive price**, while maintaining the highest quality.

A multi-level quality control system allows VTS to offer the longest, **standard 5-year warranty for devices** on the market.

24/7 IMMEDIATE
AVAILABILITY
6 CENTERS
LOGISTICS

\$ competitive
PRICE
85 000
SOLD EQUIPMENT
UNITS ANNUALLY

THE HIGHEST
QUALITY
5 YEAR GUARANTEE
FOR EACH DEVICE

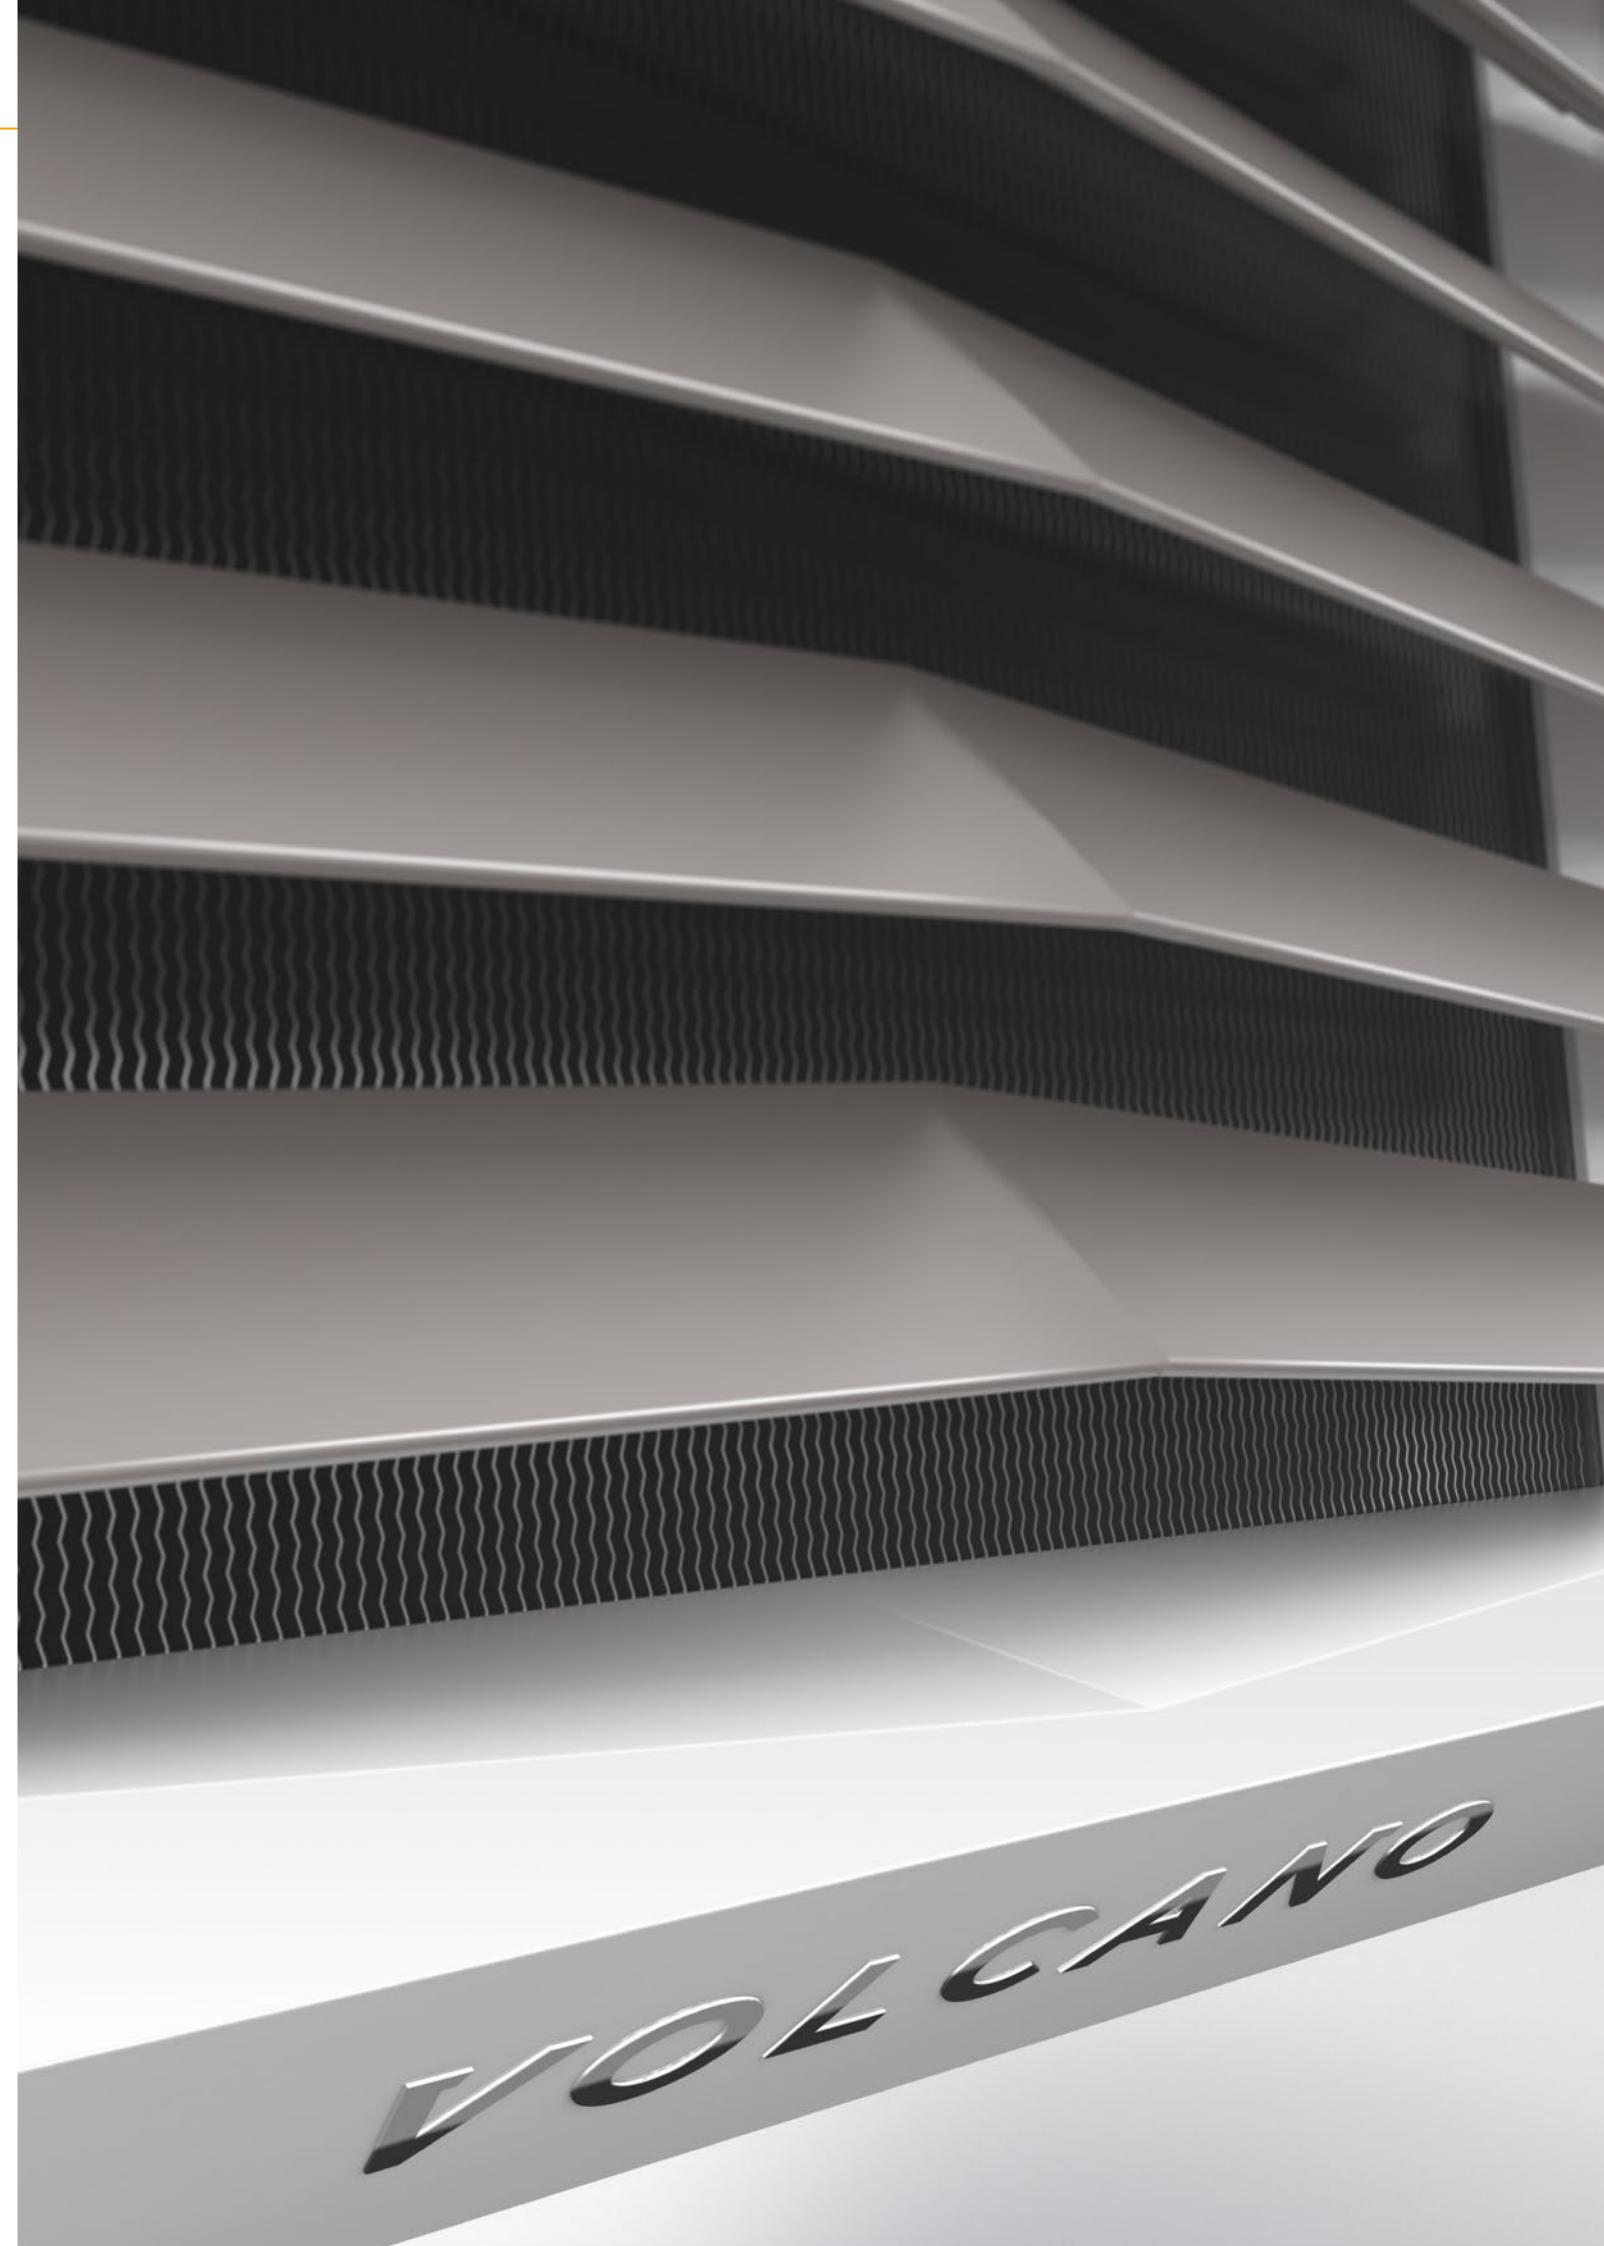

VOLCANO

The Volcano air heaters are new-generation devices combining innovative technical solutions with modern pattern design. Our precisely executed, light housing resembles the beautiful diamond shape, ideal in its simplicity. The character of the device is emphasized by the composition of selected materials and dynamically shaped air guide vane.



ENERGY-SAVING EC
ENGINES



THEE-ROW WATER
EXCHANGERS



LIFETIME+ GRAVITATIONAL
PROGRAM




AVAILABLE ONLINE
24/7

Modernity

DESIGN

Highly developed housing form guarantees optimal exchanger surface exposition while hiding all structural elements.

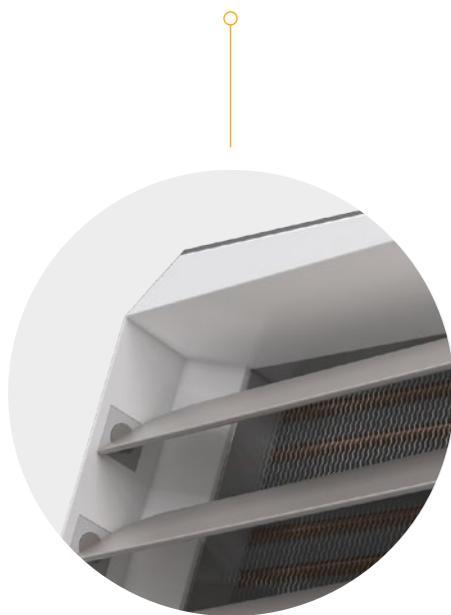



SHAPE AND COLOR

The light and clean housing lines, combined with a universal color palette, provide for harmonious adaptation to every room type.



MATERIAL

Made of highest-class ABS with an anti-UV pigment addition, the housing is characterized by high mechanical strength, durability and resistance to high temperatures. The material used guarantees unchangeable esthetic and easy-clean properties, guaranteeing long-term durability certified by a lifetime warranty for the housing.

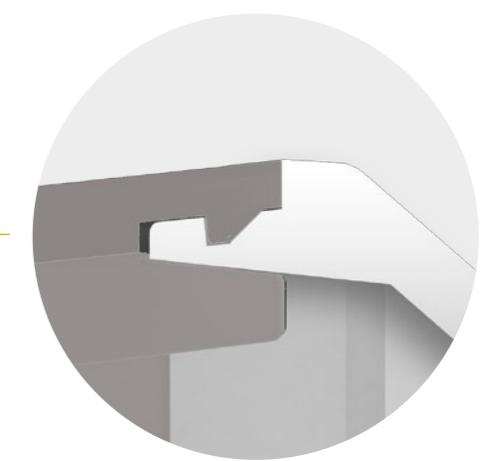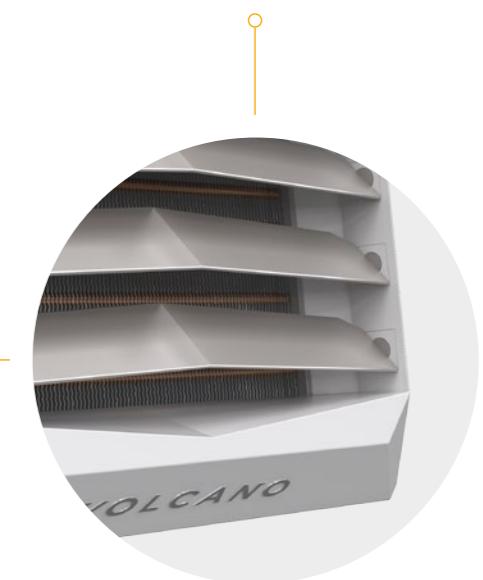


SMART LOCK

Our patented locking system guarantees a durable and precise fit of all housing elements.

Innovativeness


AIR GUIDE VANES

An innovative blade mount solution allows for their individual adjustment and stable positioning. The guide vane profile guarantees minimum air flow resistance rates.

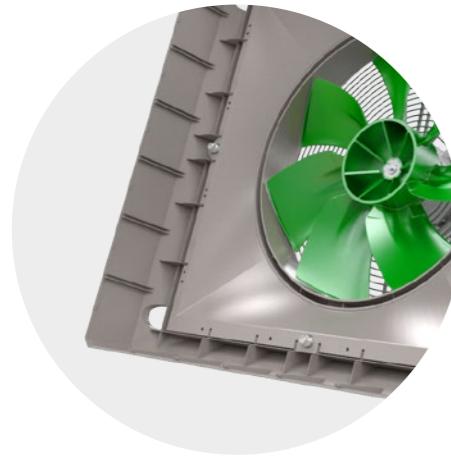



DIFFUSER

The design of the diffuser guarantees total integration with the rear section of the housing and the fan.

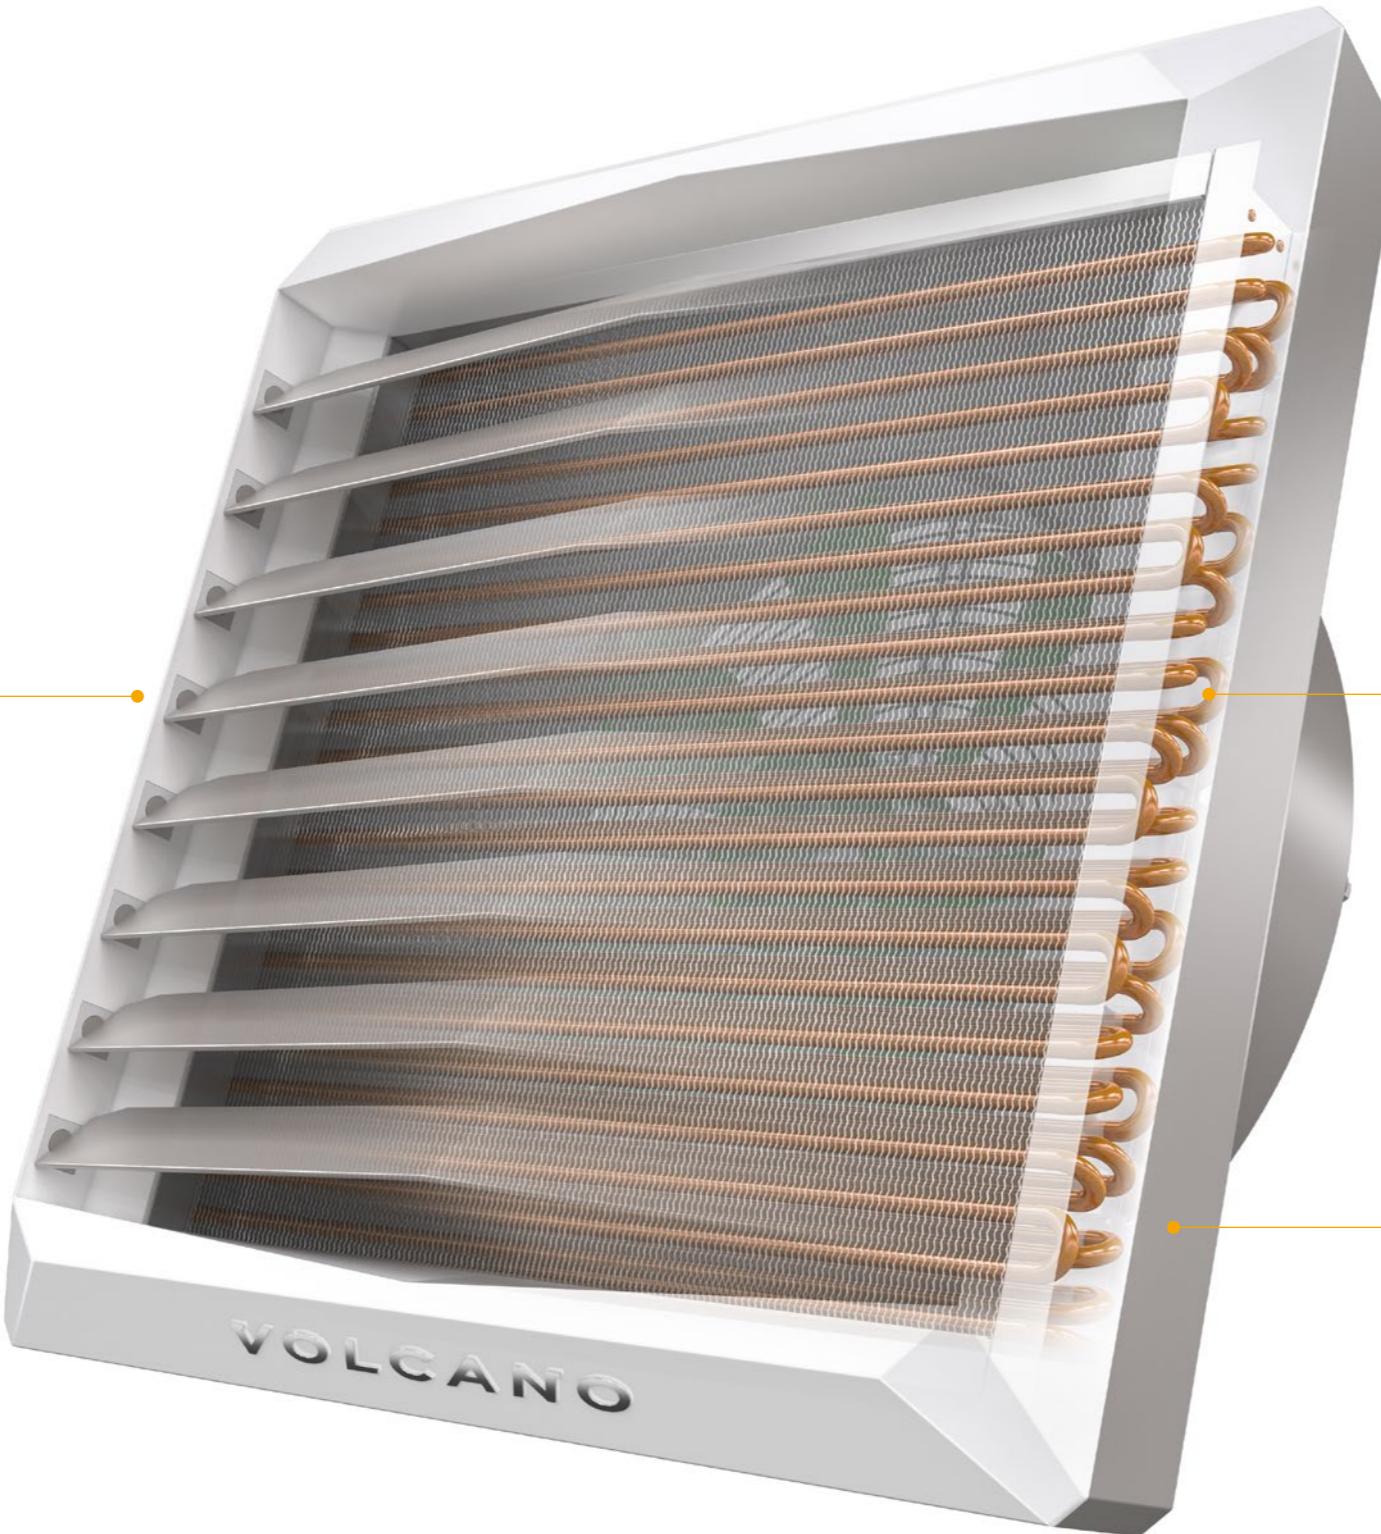

HEAT EXCHANGERS

- 1, 2 and 3-row heaters featuring increased heat exchange surfaces guarantee optimal match of heating power to the requirements of the facility;
- An additional anti-corrosive coating of aluminum louvers improves their durability;
- A test of all exchangers in helium chambers guarantees 100% verification of their tightness.

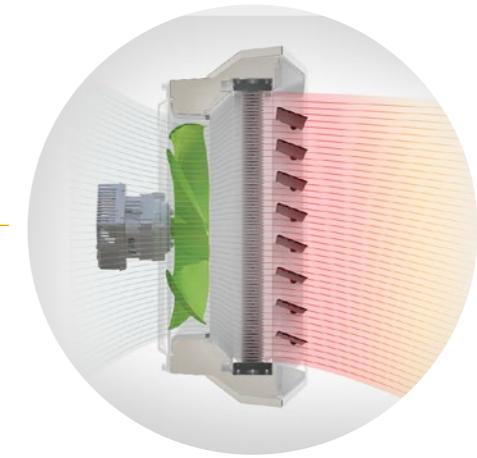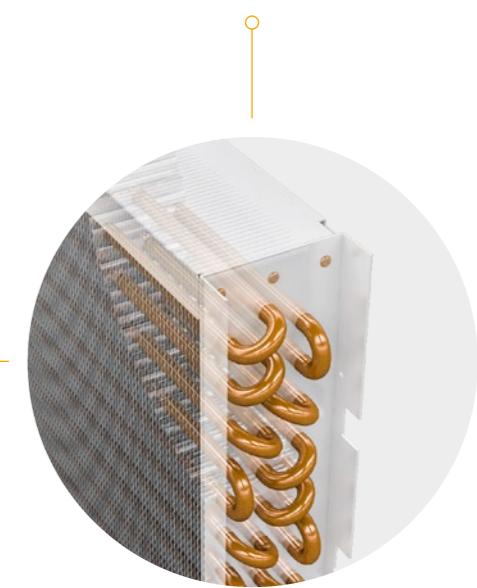

MAXIMUM AIR OUTPUT WITHOUT ANY POWER LOSS

Our ideally matching fan housing and a dedicated diffuser provide for equal distribution of air speed in the exchanger, to guarantee small flow resistance rates and full use of the exchanger's power output.

Energy efficiency


EFFICIENT FANS

Optimized profile and increased blade surfaces guarantee low usage costs and quiet operation.



EFFECTIVE MOTORS

The availability of high-efficiency, three-speed AC motors and energy-saving EC motors provides for optimal match of operational parameters of each device while maintaining minimum electricity consumption levels.

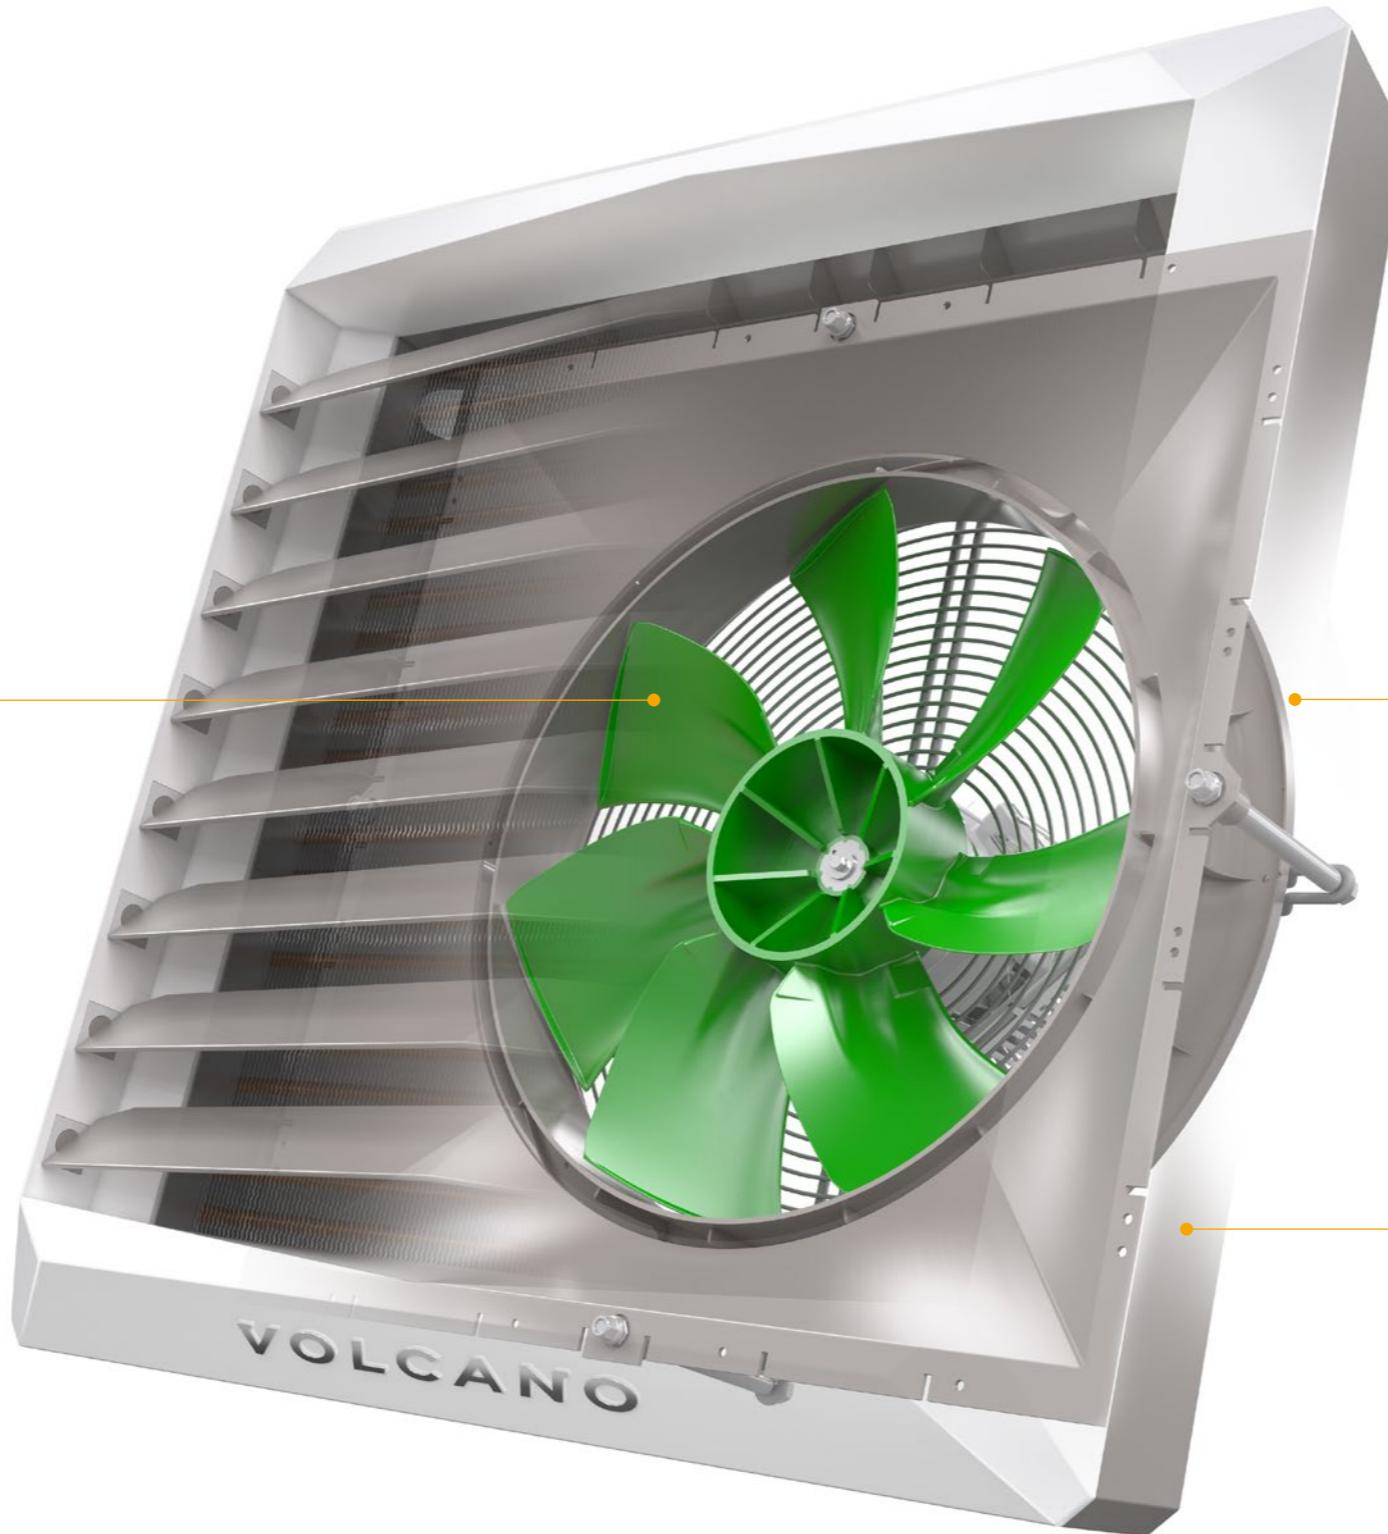


FULL RECYCLING

The device is environmentally-friendly. 100% of materials used can be recycled.



Comparison of motor efficiency

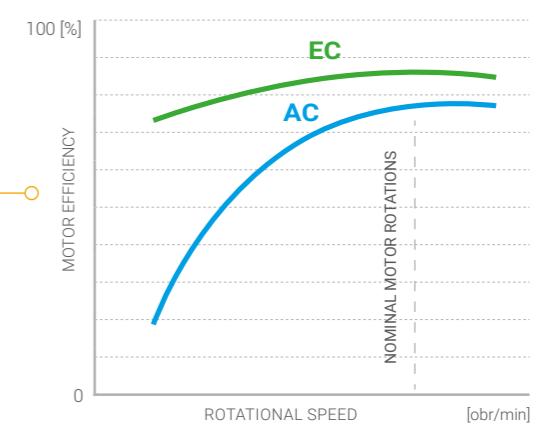

ENERGY-SAVING REGULATION




The EC motor option guarantees maximum engine efficiency at reduced rotations. Step-less rotation regulation is now available for EC motors.



02

VOLCANO

Assembly

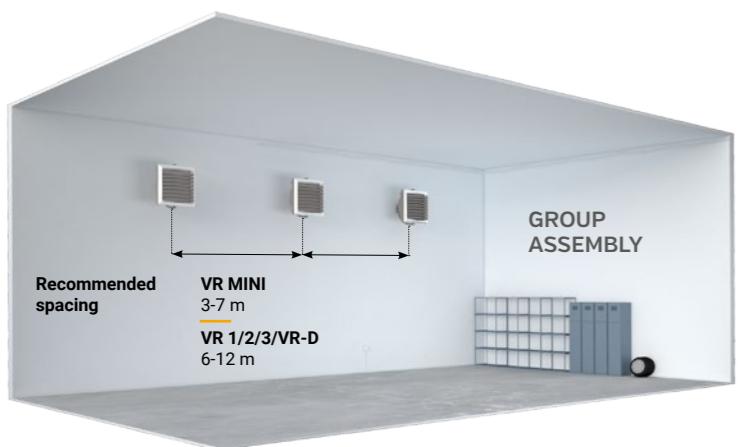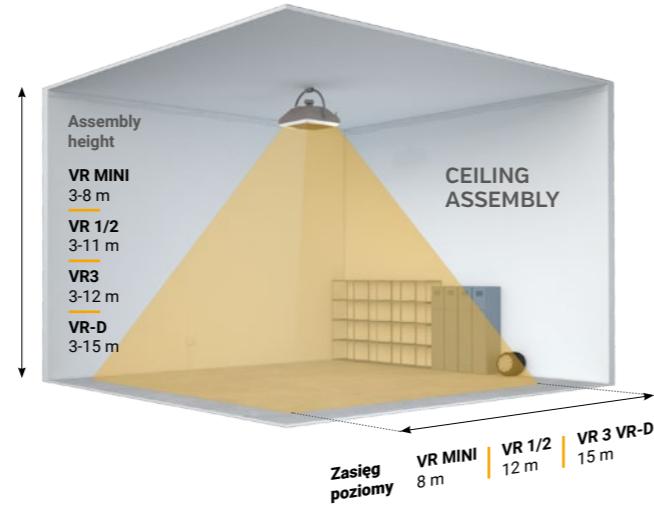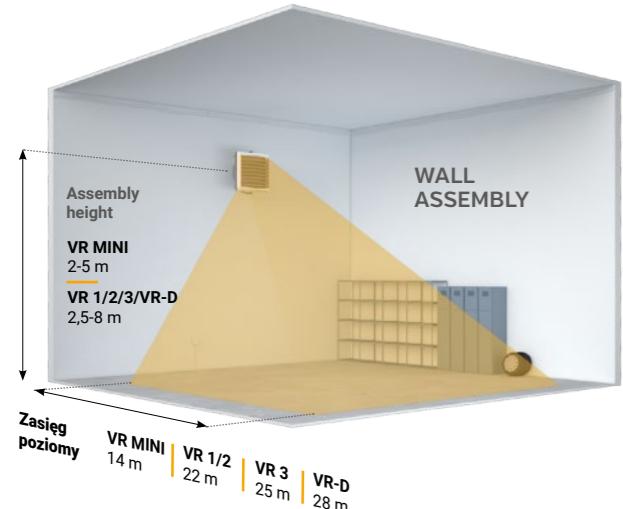


By standard, VOLCANO heaters are furnished with an assembly console for vertical and ceiling mount of the device.

The maximum vertical range of the devices is 8-15 m, depending on the type of heater. Tin turn, the maximum horizontal range of the devices is 14-25 m.

Notice! If the minimum distance of 0.4m and 0.25 m [VR Mini] is not maintained from the wall or ceiling during assembly, the device may operate incorrectly, the fan may be damaged or the entire device may work louder.

ASSEMBLY TEMPLATE

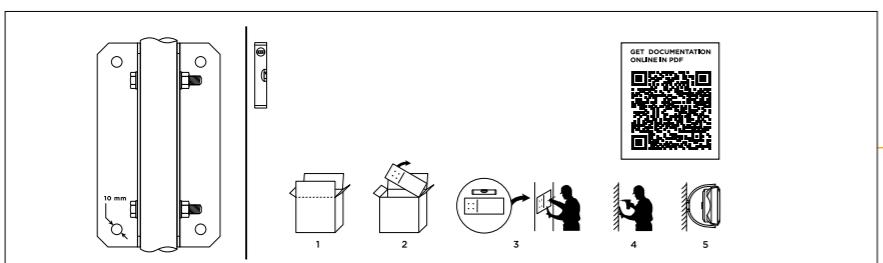

Each VOLCANO air heater pack has a printed template presenting the spacing of boreholes and a leveling line, which facilitate the mount of the console to the wall. Simply cut the template out of the cardboard lid and proceed to assembly.



VOLCANO VR-D


Destratifier



Parameter	---	VOLCANO VR-D
Maximum air output	m³/h	6500
Maximum horizontal air range	m	28
Maximum vertical air range	m	15
Device weight (bez wody)	kg	22
Power supply voltage	V/Hz	1 ~ 230/50
Motor power AC	kW	0,41
Rated current AC	A	1,7
Rated motor rotational speed AC	rpm	1380
Protection rating AC	IP	54
Motor power EC	kW	0,37
Rated current EC	A	1,7
Rated motor rotational speed EC	rpm	1400
Protection rating EC	IP	44

Legend:

H - height
L - length
W - width

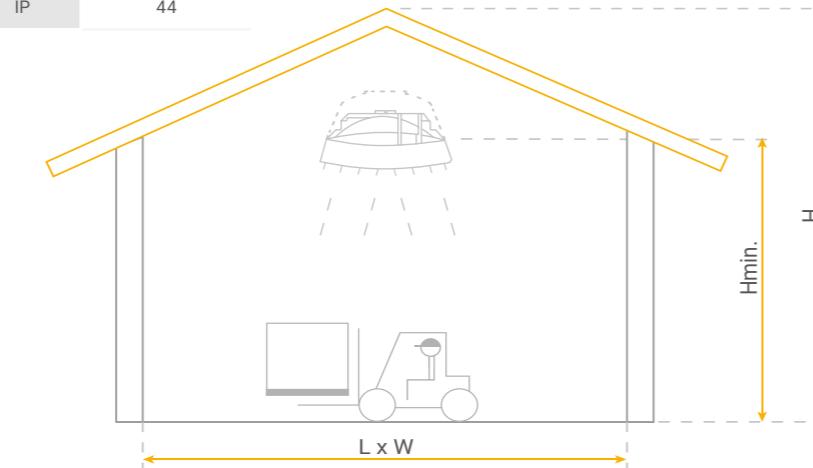

Automation

Parameters		wall-mounted controller WING / VOLCANO	programmable thermostat EH20.1	Potentiometer VR EC (0-10 V)	controller HMI VR (0-10V)
VTS product number	-	1-4-0101-0438	1-4-0101-0039	1-4-0101-0453	1-4-0101-0169
Motor support	-		AC		EC
Power supply voltage	V/ph/Hz	~230/1/50	2 x 1,5 AA batteries	~230/1/50	~230/1/50
Permissible load	A	6(3)	3	0,02 A dla 0-10V	1A for 230VAC 0,02A for 0-10V
Setting range	°C	10...30	5...30	-	5...40
Work mode	--		Manual		Manual / automatic
Hourly-weekly calendar	--	No	Yes	No	Yes
Clock	--	No	Yes	No	Yes
Temperature measurement	--	Integrated in the device			Integrated in the device
The possibility of connecting a separate temperature sensor	Pcs.	No			1 lub 4
Output signal	--	on/off			0-10V DC
Protection rating	IP	30			

Heater support of controllers and regulators					
Model	wall-mounted controller WING / VOLCANO	programmable thermostat EH20.1	rotation regulator ARW3,0/2	Potentiometer VR EC (0-10 V)	controller HMI VR (0-10V)
VTS product number	1-4-0101-0438	1-4-0101-0039	1-4-0101-0434	1-4-0101-0453	1-4-0101-0169
Motor support		AC			EC
VR Mini	Pcs.	4	1	4	4
VR1	Pcs.	2	1	4	4
VR2	Pcs.	2	1	4	4
VR3	Pcs.	1	1	4	4
VR-D	Pcs.	1	1	4	4

Parameters		Zawór z siłownikiem (VA-VEH202TA)	Regulator obrotów ARW3,0/2		Room NTC sensor (For the HMI VR controller)	
VTS product number	--	1-2-1204-2019	VTS product number	--	1-4-0101-0434	Resistance measurement element
Power supply voltage	V/ph/Hz	~230/1/50	Power supply voltage	V/ph/Hz	~230/1/50	kΩ NTC 10K
Power consumption	W	1	dopuszczalny prąd wyjściowy	A	3	Assembly
Connection	"	3/4	sposób regulacji	manualny		
Kvs	m³/h	4,5	ilość stopni regulacji	5		
Opening/closing time	min.	3/3	włącznik/wyłącznik	tak		
Protection rating	IP	54	max. temp. otoczenia	°C	35	Temperature measurement range
			Protection rating	IP	54	Protection rating



Device type series





VOLCANO

	VR Mini	VR1	VR2	VR3	VR-D
HEATING POWER RANGE	3-20 kW	5-30 kW	8-50 kW	13-75 kW	-
MAXIMUM AIR OUTPUT*	2100 m ³ /h	5300 m ³ /h	4850 m ³ /h	5700 m ³ /h	6500 m ³ /h
HORIZONTAL RANGE (MAX.)	14 m	23 m	22 m	25 m	28 m
VERTICAL RANGE (MAX.)	8 m	12 m	11 m	12 m	15 m

* maximum speed 0.5 m/s



Air speed in the distance function

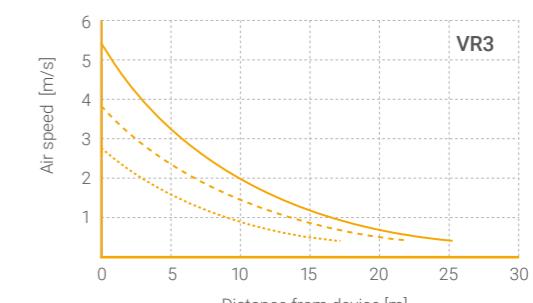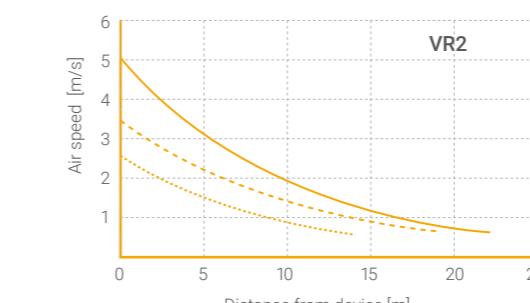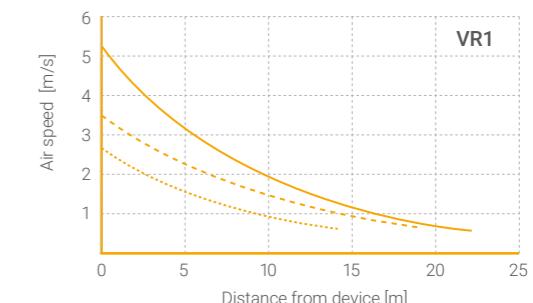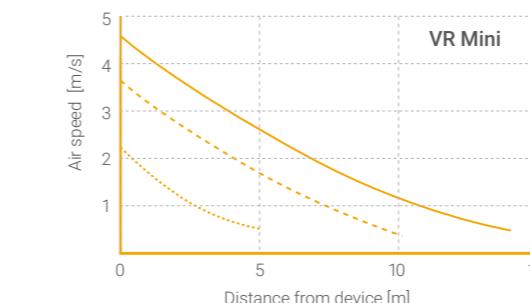

Technical parameters

Parameter	Unit	VOLCANO V MINI	VOLCANO VR1	VOLCANO VR2	VOLCANO VR3	VOLCANO VR-D
Number of heater rows	-	2	1	2	3	—
Maximum air output	m³/h	2100	5300	4850	5700	6500
Heating power range	kW	3-20	5-30	8-50	13-75	—
Maximum temperature of heating medium	°C		130			—
Maximum working pressure	MPa		1,6			—
Maximum horizontal air range	m	14	23	22	25	28
Maximum vertical air range	m	8	12	11	12	15
Water capacity	dm³	1,12	1,25	2,16	3,1	—
Connection stub pipe diameter	"		3/4			—
Device weight (without water)	kg	17,5	27,5	29	31	22
Power supply voltage	V/Hz		1 ~ 230/50			
AC motor power	kW	0,115	0,28		0,41	
AC motor rated current	A	0,53	1,3		1,7	
AC motor rotations	rpm	1450		1380		
AC motor protection rating	IP		54			
EC motor power	kW	0,095	0,25		0,37	
EC motor rated current	A	0,51	1,3		1,7	
EC motor rotations	rpm	1450	1430		1400	
EC motor protection rating	IP		44			
Housing color palette		Front: RAL 9016 Traffic White, rear + console: RAL 7036 Platinum Gray, rotor: RAL 6038 Green				

Pipeline diameters*

Number of heaters connected to the main	VR Mini		VR1		VR2		VR3	
	Max water flow [m³/h]	Pipeline diameter ["]	Max water flow [m³/h]	Pipeline diameter ["]	Max water flow [m³/h]	Pipeline diameter ["]	Max water flow [m³/h]	Pipeline diameter ["]
1	0,9	3/4	1,3	3/4	2,2	1	3,3	1
2	1,8	1	2,7	1	4,4	1 1/4	6,6	1 1/2
3	2,8	1 1/4	4	1 1/4	6,6	1 1/2	9,9	1 3/4
4	3,7	1 1/4	5,3	1 1/2	8,8	1 3/4	13,2	2
5	4,6	1 1/4	6,7	1 1/2	11,1	2	16,6	2 1/4
6	5,5	1 1/2	8	1 3/4	13,3	2	19,9	2 1/2
7	6,4	1 1/2	9,3	1 3/4	15,5	2	23,2	2 1/2
8	7,4	1 1/2	10,6	2	17,7	2 1/4	26,5	2 3/4
9	8,3	1 3/4	12	2	19,9	2 1/2	29,8	3
10	9,2	1 3/4	13,3	2	22,1	2 1/2	33,1	3

* dotyczy długości rurociągu nie dłuższej niż 40 m

VOLCANO VR MINI

FAN SPEED		III	II	I
Fan output	m³/h	2100	1650	1100
Noise level for heaters with AC motors*	dB(A)	52	42	29
Noise level for heaters with EC motors*	dB(A)	50	40	27
AC motor power	W	115	68	48
EC motor power**	W	95	56	39
Horizontal range	m	14	8	5
Vertical range	m	8	5	3

VOLCANO VR1

FAN SPEED		III	II	I
Fan output	m³/h	5300	3900	2800
Noise level for heaters with AC motors*	dB(A)	56	51	40
Noise level for heaters with EC motors*	dB(A)	54	49	38
AC motor power	W	280	220	190
EC motor power**	W	250	190	162
Horizontal range	m	23	20	15
Vertical range	m	12	9	7

VOLCANO VR2

FAN SPEED		III	II	I
Fan output	m³/h	4850	3600	2400
Noise level for heaters with AC motors*	dB(A)	56	51	40
Noise level for heaters with EC motors*	dB(A)	54	49	38
AC motor power	W	280	220	190
EC motor power**	W	250	190	162
Horizontal range	m	22	19	14
Vertical range	m	11	8	6

VOLCANO VR3

FAN SPEED		III	II	I
Fan output	m³/h	5700	4100	3000
Noise level for heaters with AC motors*	dB(A)	57	51	45
Noise level for heaters with EC motors*	dB(A)	55	49	43
AC motor power	W	410	320	245
EC motor power**	W	370	285	218
Horizontal range	m	25	22	17
Vertical range	m	12	9	7

VOLCANO VR-D

FAN SPEED		III	II	I
Fan output	m³/h	6500	4600	3400
Noise level for heaters with AC motors*	dB(A)	58	52	45
Noise level for heaters with EC motors*	dB(A)	56	50	43
AC motor power	W	410	320	245
EC motor power**	W	370	285	218
Horizontal range	m	25	22	17
Vertical range	m	12	9	7

* reference conditions: 1500m³ room volume, measurement performed at 5m

** EC motor power for the above specified fan outputs

VOLCANO VR MINI

Tz / Tp parameters [°C]																	
		90/70				80/60				70/50				50/30			
Tp1 [°C]	Qp [m³/h]	Pg [kW]	Tp2 [°C]	Qw [m³/h]	Δp [kPa]												
0	2100	20,7	29,5	0,92	13,9	17,9	25,4	0,79	10,7	15,1	21,4	0,66	7,9	9,2	13,1	0,4	3,4
	1650	18,1	32,6	0,8	10,7	15,6	28,2	0,69	8,3	13,1	23,7	0,58	6,1	8	14,6	0,35	2,6
	1100	14,1	38,3	0,63	6,8	12,2	33,2	0,54	5,3	10,3	27,9	0,45	3,9	6,3	17,2	0,28	1,7
5	1650	16,9	35,6	0,75	9,5	16,6	28,6	0,73	9,3	13,7	24,5	0,6	6,6	7,6	16,1	0,34	2,5
	2100	19,4	32,6	0,86	12,3	14,5	31,1	0,64	7,2	12	26,6	0,53	5,2	6,8	17,4	0,3	2
	1100	13,3	40,9	0,59	6	11,3	35,8	0,5	4,6	9,4	30,5	0,41	3,3	5,4	19,6	0,23	1,3
10	2100	18,1	35,7	0,8	10,8	15,3	31,7	0,67	8	12,4	27,6	0,54	5,5	6,4	19,1	0,28	1,7
	1650	15,8	35,5	0,7	8,4	13,3	34,1	0,59	6,2	10,8	29,5	0,47	4,3	5,6	20,1	0,24	1,4
	1100	12,4	43,5	0,55	5,3	10,4	38,3	0,46	3,9	8,5	33	0,37	2,8	4,4	21,9	0,19	0,9
15	2100	16,8	38,8	0,74	9,4	13,9	34,8	0,61	6,7	11	30,7	0,48	4,4	4,9	22	0,22	1,1
	1650	14,6	41,4	0,65	7,3	12,1	37	0,54	5,2	9,6	32,4	0,42	3,5	4,3	22,8	0,19	0,9
	1100	11,5	46,1	0,51	4,6	9,5	40,9	0,42	3,3	7,6	35,5	0,33	2,2	3,3	24,1	0,15	0,5
20	2100	15,5	41,9	0,69	8	12,6	37,9	0,56	5,6	9,7	33,7	0,42	3,5	3,3	24,7	0,14	0,5
	1650	13,5	44,3	0,6	6,2	11	39,8	0,48	4,3	8,4	35,2	0,37	2,7	2,8	25,1	0,12	0,4
	1100	10,6	48,6	0,47	4	8,6	43,4	0,38	2,8	6,6	38	0,29	1,8	1,9	25,2	0,08	0,2

VOLCANO VR1

Tz / Tp parameters [°C]																	
		90/70				80/60				70/50				50/30			
Tp1 [°C]	Qp [m³/h]	Pg [kW]	Tp2 [°C]	Qw [m³/h]	Δp [kPa]												
0	5300	29,9	16,8	1,33	26	25,8	14,5	1,14	20	21,7	12,2	0,95	14,6	13,2	7,5	0,58	6,2
	3900	25,4	19,4	1,12	19,1	21,9	16,7	0,97	14,7	18,4	14,1	0,81	10,8	11,3	8,6	0,49	4,6
	2800	21,2	22,6	0,94	13,6	18,3	19,5	0,81	10,5	15,4	16,4	0,68	7,8	9,4	10,1	0,41	3,3
5	5300	28	20,8	1,24	23	23,9	18,4	1,05	17,3	19,7	16,1	0,87	12,3	11,3	11,3	0,49	4,6
	3900	23,8	23,2	1,05	16,9	20,3	20,5	0,9	12,8	16,8	17,8	0,74	9,1	9,6	12,3	0,42	3,4
	2800	19,9	26,2	0,88	12,1	16,9	23,1	0,75	9,1	14	19,9	0,62	6,6	8	13,6	0,35	2,5
10	5300	26,1	24,7	1,16	20,2	22	22,4	0,97	14,8	17,8	20	0,78	10,2	9,2	15,2	0,4	3,2
	3900	22,2	27	0,98	14,9	18,7	24,3	0,82	10,9	15,1	21,6	0,66	7,6	7,9	16	0,34	2,4
	2800	18,5	29,7	0,82	10,6	15,6	26,6	0,69	7,8	12,7	23,5	0,56	5,4	6,6	17	0,29	1,8
15	5300	24,2	28,6	1,07	17,5	20	26,3	0,88	12,5	15,8	23,9	0,7	8,2	7,2	19	0,31	2
	3900	20,5	30,7	0,91	12,9	17	28	0,75	9,2	13,5	25,3	0,59	6,1	6,1	19,7	0,27	1,5
	2800	17,2	33,3	0,76	9,2	14,2	30,2	0,63	6,6	11,3	27	0,5	4,4	5,1	20,4	0,22	1,1
20	5300	22,2	32,5	0,99	15	18,1	30,2	0,8	10,3	13,8	27,8	0,61	6,4	5	22,8	0,22	1,1
	3900	18,9	34,5	0,84	11,1	15,4	31,8	0,68	7,6	11,8	29	0,52	4,8	4,2	23,2	0,18	0,8
	2800	15,8	36,8	0,7	7,9	12,9	33,7	0,57	5,5	9,9	30,5	0,43	3,5	3,5	23,7	0,15	0,6

VOLCANO VR2

Tz / Tp parameters [°C]																	
		90/70				80/60				70/50				50/30			
Tp1 [°C]	Qp [m³/h]	Pg [kW]	Tp2 [°C]	Qw [m³/h]	Δp [kPa]												
0	4850	50,0	30,7	2,21	23,8	43,1	26,5	1,9	18,3	36,2	22,3	1,59	13,5	22,3	13,7	0,97	5,7
	3600	41,9	34,7	1,86	17,2	36,5	30	1,6	13,3	30,5	25,3	1,34	9,8	18,8	15,6	0,82	4,2
	2400	32,7	40,6	1,45	10,8	28,3	35,2	1,25	8,4	23,9	29,7	1,05	6,2	14,8	18,4	0,64	2,7
5	4850	46,7	33,7	2,07	21,1	39,9	29,5	1,76	15,9	33,1	25,3	1,45	11,4	19	16,7	0,83	4,3
	3600	39,3	37,5	1,74	15,2	33,6	32,8	1,48	11,5	27,9	28,1	1,22	8,3	16,1	18,3	0,7	3,1
	2400	30,6	43,1	1,36	9,6	26,2	37,6	1,16	7,3	21,8	32,1	0,96	5,3	12,6	20,7	0,55	2
15	4850	43,6	36,8	1,93	18,5	36,7	32,6	1,62	13,6	29,8	28,4	1,31	9,4	15,6	19,6	0,68	3
	3600	36,6	40,4	1,62	13,4	30,9	35,6	1,36	9,9	25,2	30,9	1,11	6,8	13,2	21	0,58	2,2
	2400	28,6	45,5	1,27	8,4	24,2	40	1,07	6,3	19,7	34,5	0,87	4,4	10,4	22,9	0,45	1,4
15	4850	40,4	39,8	1,79	16	33,5	35,6	1,48	11,5	26,6	31,3	1,17	7,6	12,2	22,5	0,53	1,9
	3600	34	43,1	1,51	11,6	28,2	38,4	1,25	8,3	22,4	33,6	0,99	5,5	10,3	23,5	0,45	1,4
	2400	26,5	48	1,18	7,3	22,1	42,5	0,98	5,3	17,6	36,9	0,77	3,5	8	25	0,35	0,9
20	4850	37,2	42,8	1,65	13,7	30,3	38,6	1,34	9,5	23,3	34,3	1,02	5,9	8,4	25,2	0,37	1
	3600	31,3	45,9	1,39	10	25,5	41,1	1,13	6,9	19,7	36,3	0,86	4,3	7	25,8	0,31	0,7
	2400	24,5	50,4	1,09	6,3	20	44,8	0,88	4,4	15,5	39,2	0,68	2,8	5,3	26,6	0,23	0,4

VOLCANO VR3

Tz / Tp parameters [°C]																	
		90/70				80/60				70/50				50/30			
Tp1 [°C]	Qp [m³/h]	Pg [kW]	Tp2 [°C]	Qw [m³/h]	Δp [kPa]												
0	5700	75,0	39	3,31	32,6	64,5	33,8	2,85	25,1	54,3	28,4	2,39	18,4	33,6	17,6	1,46	7,8
	4100	60,6	44,1	2,69	22	52,5	38,2	2,32	17	44,3	32,2	1,95	12,5	27,5	20	1,2	5,4
	3000	49,5	49,2	2,19	15	42,9	42,7	1,89	11,6	36,3	36,1	1,59	8,6	22,6	22,5	0,98	3,7
5	5700	69,9	41,6	3,1	28,9	59,8	36,3	2,64	21,7	49,6	31	2,18	15,5	28,7	20	1,25	5,8
	4100	56,8	46,3	2,52	19,5	48,7	40,4	2,15	14,8	40,5	34,4	1,78	10,6	23,5	22,1	1,02	4
	3000	46,4	51,1	2,06	13,3	39,8	44,6	1,76	10,1	33,1	37,9	1,46	7,3	19,3	24,2	0,84	2,8
10	5700	65,2	44,1	2,89	25,3	55	38,8	2,43	18,6	44,8	33,4	1,97	12,8	23,7	22,4	1,03	4,1
	4100	53	48,6	2,35	17,1	44,9	42,6	1,98	12,7	36,6	36,6	1,61	8,8	19,4	24,1	0,84	2,8
	3000	43,3	53,1	1,92	11,7	36,7	46,5	1,62	8,7	30	39,8	1,32	6,1	15,9	25,8	0,69	2
15	5700	60,4	46,6	2,68	21,9	50,2	41,3	2,22	15,7	40	35,9	1,76	10,3	18,4	24,6	0,8	2,6
	4100	49,2	50,8	2,18	14,9	41	44,8	1,81	10,7	32,7	38,8	1,44	7,1	15,1	26	0,66	1,8
	3000	40,2	55	1,78	10,2	33,6	48,4	1,48	7,4	26,8	41,6	1,18	4,9	12,4	27,3	0,54	1,2
20	5700	55,6	49,1	2,47	18,8	45,4	43,8	2	13	35	38,3	15,4	8,1	12,8	26,7	0,56	1,3
	4100	45,3	53	2,01	12,8	37,1	47	1,64	8,9	28,7	40,9	1,26	5,6	10,4	27,5	0,45	0,9
	3000	37,1	56,9	1,64	8,8	30,4	50,2	1,34	6,1	23,6	43,4	1,04	3,9	8,3	28,2	0,36	0,6

Legend:

- T_z - device feed water temperature
- T_p - device return water temperature
- T_{p1} - device feed air temperature
- T_{p2} - device outlet air temperature

- P_g - device heating power
- Q_p - air output
- Q_w - water flow
- Δp - heat exchanger pressure loss

Legend:

- device feed water temperature
- device return water temperature
- device feed air temperature
- device outlet air temperature

- device heating power
- air output
- water flow
- heat exchanger pressure loss

FAQ DEVICES

1. HOW DO I CORRECTLY SELECT A VOLCANO HEATER?

Step one: determine the temperature inside the target room and its heat demand for heating purposes. Air heating is one of the most dynamic methods of heating rooms, allowing for the application of temporary (e.g. overnight) temperature lowering in the heating room and its fast heating right before use. This allows for significant reductions in heat consumption, but does not require any heating power surpluses to be added to the devices for quick heating.

Step two: determine the location of heaters and the necessary air stream range to guarantee the achievement of suitable temperatures in the areas of the room you are interested in. Notice that the air speed should not exceed the permissible values in human occupancy zones or on any other sensitive areas, e.g. in the vicinity of industrial processes.

Step three: obtain information on the temperature of the heating medium and access to the building.

Step four: Having all of the aforementioned data, take the VOLCANO catalogue and look for devices which fulfill the criteria of the required air stream and required heating power, considering the possibility of work at varying outputs (first, second or third speed). Use the charts presenting air speeds in the distance function to determine the range for each device size. Alternatively, use the chart on page 22, presenting the range for limit speed of 0.5 m/s. Determine the heating power for each device speed and for various heating medium temperatures using the tables on pages 25-26.

Easy selection “shortcut”: To make your work easier, use a selection program available on **ehcad.vtsgroup.com**.

2. WHAT IS THE DIFFERENCE IN CONTROL BETWEEN THREE-SPEED AC AND EC MOTORS?

VOLCANO heaters, both those equipped with EC motors and those equipped with AC motors are regulated in terms of 3 speeds. The speeds of a fan equipped with an AC motor are switched by changing suitable winding outlets using a simple controller equipped with relay outputs. The use of a voltage regulator is not required.

The speed of a fan equipped with an EC motor is regulated using the 0-10 V signal. Optionally, use a simple wall-mounted potentiometer allowing for step-less efficiency change or an advanced microprocessor controller, which can carry out a series of other functions (regulation of temperature in the room, weekly program ON/OFF and working parameter settings, anti-freeze functions, etc.), apart from the 3 saved efficiency thresholds.

3. HOW SHOULD I GRADE THE DIAMETERS OF THE MAIN FEED PIPELINES WHEN CONNECTING A LARGER NUMBER OF HEATERS?

The diameter of the main pipeline should be adapted in such a manner that the water flow speed does not exceed 2.5 m/s. This is caused by a compromise between investment costs related to the size of the pipes used and usage costs related to the resistance of water flow in pipelines. We recommend the following minimum pipeline diameters, depending on the number of devices and type of heaters connected to the main, according to the table on page 23.

In the case of extensive installations, i.e. when heaters are situated at least 10 m from the heat source, the diameters of pipelines should be corrected by considering lower water flow speeds.

4. HOW DO I CONNECT THE THERMO-STAT TO HAVE THE FAN SWITCH OFF WHEN THE VALVE IS CLOSED?

The VOLCANO technical documentation contains electrical connection diagrams for various operation variants. The easiest way of obtaining an interlock of the fan switching function with valve closing is to connect the entire device to a power grid secured with a circuit breaker via a thermostat. In this case, pay attention to the maximum permissible load of thermostat contacts; this permissible load should be at least 3 (10) A per single VOLCANO device. When the contact load is too small, an electrical relay with a coil powered by a thermostat (230 V DC) should be used, and the voltage of working contacts should be 230 V AC, and the load of working contacts should be adapted to the number of VOLCANO devices controlled.

5. CAN I CONNECT A FEED PIPELINE TO THE UPPER HEAT EXCHANGER MANIFOLD?

Yes, you can, although a heat exchanger powered by an upper manifold will be more difficult to vent. Remember to leave sufficient space for mounting a valve actuator, which should be installed on the return stub pipe.

6. CAN I FEED VOLCANO VR MINI/VR1 / VR2/ VR3 HEATERS WITH A NON-FREEZE MEDIUM?

Yes, you can. The most frequently used non-freeze medium is a water solution of ethylene glycol. The heaters mounted in VOLCANO can support up to 50% mixtures. Make sure to check, however, if other elements of the technological heat installation (valves, pump, etc.) are adapted to work on glycol mix. To do this, check the recommendations of the manufacturers of particular components used. Remember that the use of glycol mixes, which are usually characterized by higher viscosity and lower thermal capacity, compared to water, increases the resistance of heating medium flow and reduces the heating power of the device.

7. CAN THE VOLCANO VR MINI/VR1 / VR2/ VR3 HEATER BE USED TO COOL DOWN AIR AS WELL?

Yes, but only when the temperature of the working medium is higher than the dew point of the cooled air, since VOLCANO devices are not equipped with drip trays and we shouldn't lead to the condensation of humidity. To switch a VOLCANO device to the cooling function, connect an ice water installation. When there is the risk that the temperature of the working medium could fall below the dew point of the cooled air, make sure to build a drip tray and install it under the device. In this case, the VOLCANO device will be able to work with the horizontal air outlet only. The use of a VOLCANO device with vertical air outlet can result in flooding the fan motor or the space under the device, since mounting a drip tray in this position of the device is impossible.

VOLCANO is not equipped with a liquid trap, which is why you should always reduce its work efficiency in the cooling mode, in order to eliminate the phenomenon of drip-trapping by the air flowing through the heat exchanger.

8. CAN VOLCANO VR MINI/VR1 / VR2/ VR3 HEATERS SUPPORT HEAT PUMPS?

Yes, VOLCANO water heaters can cooperate with heat pumps. However, when selecting the size of the device, take the low temperature of the heating medium into account. We recommend the use of heaters with large heat exchange surfaces. For this type of installation, we recommend the VR3 heater equipped with a three-row heat exchanger. Make sure to check VR Mini and VR2 with two-row heat exchangers as well.



FAQ
AUTOMATION

Scan and
download



REGIONAL VTS REPRESENTATIVES

[woj. pomorskie, zachodniopomorskie,
kujawsko-pomorskie,
warmińsko-mazurskie]

T: +48 725 880 002

[woj. lubuskie, wielkopolskie,
dolnośląskie, opolskie, łódzkie]

T: +48 725 960 001

[woj. śląskie, małopolskie,
podkarpackie, świętokrzyskie]

T: +48 725 380 002

[woj. lubelskie,
podlaskie, mazowieckie]

T: +48 725 820 001

EH Business Development Manager

T: +48 725 330 002

MAIN VTS COMMERCIAL OFFICES

40-028 Katowice, ul. Francuska 70/611,
T: +48 32 757 39 69, F: +48 32 757 26 79

60-242 Poznań, ul. Palacza 13,
T: +48 61 664 30 90, F: +48 61 664 30 91

00-844 Warszawa, ul. Grzybowska 87,
Biurowiec Concept Tower, 9 piętro
T: +48 22 431 37 00, F: +48 22 431 37 14

VTS HQ

VTS Sp. z o.o.
HQ Division, Olivia Tower
Al. Grunwaldzka 472 A
80-309 Gdańsk, Poland
T: +48 [58] 628 13 54, F: +48 [58] 628 13 22
marketing@vtsgroup.com