

MAXPRO[®]

Maxpro reserves the right to change all data including images, specifications, features and services information without notice.

Maxpro will hold no liability for printing errors or mistakes.



MAXPRO

Krebs Trading (Ningbo) Co., Ltd.

136 Changyang Road Jiangbei District Ningbo 315033, China

Tel: 86-574-8768 9202

Fax: 86-574-8743 2270

Email: info@krebs-tools.com

MAXPRO[®]
PROFESSIONAL POWER TOOLS

www.maxpro-tools.com
2020 
PRODUCT CATALOGUE

CONTENTS



01	About Us	02-06
02	Cordless Tools	07-08
03	Corded Drills	09-13
04	Demolition & Hammers	14-17
05	Grinders	19-24
06	Sanders & Planers	25-27
07	Wood Saws	29-32
08	Others	33-36
09	Bench Top Tools	39-40
10	Pressure Washer	41
11	Welding Machine	42
12	Air Compressors	44-46


ABOUT US

Maxpro is a professional power tool manufacturer and brand promoter.

With over 40,000m² manufacturing base and over 20 years' experiences, Maxpro designs and produces a vast range of high-quality power tools and offer to worldwide consumers, which accurs very good reputation. So far The Maxpro products have been registered and distributed into more than 30 countries in the world.

The mission of Maxpro is dedicated to find up global partners in the world and offer them with one-stop buying platform, including portable tools, bench tools, air tools, engine tools, hand tools, garden tools, accessories and so on, meanwhile, continuously output them with complete and perfect after-sales service and on-time shipment delivery.

We are expecting applicable agents for Maxpro and can be assured that their business is safeguarded along every step of the way.

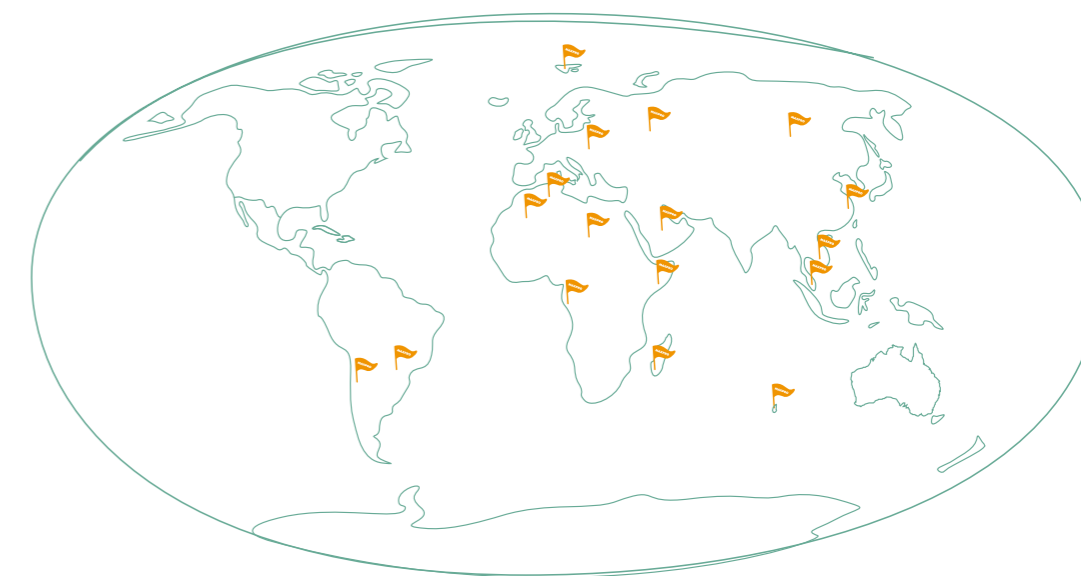

40,000 m²

Manufacture and R&D Land

ISO 9001:2008

CE,GS,EMC,UL,ETL

High Quality Control



ABOUT **MAXPRO**

The brand name Maxpro is combination of "Maximum" and "Professional", which stands for our abition of pursuing excellent products.

After 10 years' successful experiences in OEM trading, Maxpro brand officially debut in 2010 and introduced to customers.

Along with the progress of distributing its products in different areas in the world, the brand name Maxpro is also globally registered and spread out.



QUALITY CONTROL

All Maxpro products are carried out with uniform test standards, which are mainly suitable for professional users.

We have 4 steps of strict quality controls: raw material inspection, on-line production inspection, finished-product inspection and pre-shipment inspection, it is to assure all Maxpro products are flawless and offered to our esteemed customers.



MANUFACTURING BASE

Maxpro has nowadays developed many kinds of different power tools. Its products boast a novel design, an easy use, a good capability and a high quality, personally tailored for its customers.

R&D

R&D is core culture of Maxpro.

We have a professional R&D team over 40 engineers, who are familiar with power tools and understand market demands.

Each year Maxpro will listen to market&customer demands, debut a portion of new products to enjoy our users.





LOGISTICS & WAREHOUSE

Maxpro set up its own warehouse system near the sea port and meanwhile prepare existing stock for all products.

Once upon detecting customer' new demand, we will despatch goods in the shortest time and in low MOQ.

AFTER-SALES SERVICE

Maxpro prepare stock for easy-broken parts of all tools which can be delivered to customers in fastest time.

Our after-sales engineers will also be sent to global dealers irregularly to follow the services.



SUPPORTS

Maxpro offers multiple ways of supports to our dealers.

Nomatter the promotion gifts, advertisements, promotion, road show, dealer tourism..., what our dealer needs, Maxpro will endeavour to satisfy.

STRATEGIC POLICY

Maxpro intends to find exclusive distributor in the world and set up be long-term partnership with them.

Through mutual hard-working on promoting Maxpro products, we wish to bring mutual benefits to both parties

MPCD12Li/2E | 112-0019

Cordless Drill



Features

- LED power indicator
- Magnet for carrying bits
- Quick - stop function
- Spindle lock function
- Forward / reverse rotation
- Variable speed
- Two mechanical speed
- LED light

Specification

	Voltage: 12V MAX
	No-load speed: I 0-350/min II 0-1300/min
	Chuck capacity: 0.8-10mm Single Sleeve
	Clutch settings: 17+1
	Battery capacity: 1.3Ah Li-ion
	Peak torque: 26N.m
	Charging time: 1hour
	Weight incl. battery: 1KG

Packing Details

- Size: 38.5x31.5x24.5cm / 4pcs
- G.W. / N.W.: 9.5kgs / 8.5kgs

Accessories Included

- 1.3Ah Li-ion battery x2
- Quick charger
- Metal belt clip
- 25mm CR-V screwdriver bits (T20, T25, SL6 x2, PZ1 x2)
- Magnetic bit holder: 55mm
- HSS twist drill bits: Φ1.5mm, Φ2mm, Φ3mm, Φ4mm, Φ5mm, Φ6mm
- Battery cover x2



MPCD18Li/2E | 112-0020

Cordless Drill



Features

- LED power indicator
- Quick - stop function
- Spindle lock function
- Two mechanical speed
- Forward / reverse rotation
- Variable speed
- LED light

Specification

	Voltage: 18V
	No-load speed: I 0-350/min II 0-1250/min
	Chuck capacity: 0.8-10mm Single Sleeve
	Clutch settings: 15+1
	Battery capacity: 1.5Ah Li-ion
	Peak torque: 30N.m
	Charging time: 1hour
	Weight incl. battery: 1.3KG

Packing Details

- Size: 41.5x33.5x27.5cm / 4pcs
- G.W. / N.W.: 13.2kgs / 12.2kgs

Accessories Included

- 1.5Ah Li-ion battery x2
- Quick charger
- Metal belt clip
- 25mm CR-V screwdriver bits (T20, T25, SL6 x2, PZ1 x2)
- Magnetic bit holder: 55mm
- HSS twist drill bits: Φ1.5mm, Φ2mm, Φ3mm, Φ4mm, Φ5mm, Φ6mm
- Battery cover x2



MPCD14Li/2E | 112-0022

Cordless Drill



Features

- Two mechanical speed
- Quick - stop function
- Spindle lock function
- LED power indicator
- Forward / reverse rotation
- Variable speed
- LED light

Specification

	Voltage: 14.4V
	No-load speed: I 0-350/min II 0-1250/min
	Chuck capacity: 0.8-10mm Single Sleeve
	Clutch settings: 15+1
	Battery capacity: 1.5Ah Li-ion
	Peak torque: 28N.m
	Charging time: 1hour
	Weight incl. battery: 1.25KG

Packing Details

- Size: 41.5x33.5x27.5cm / 4pcs
- G.W. / N.W.: 12.7kgs / 11.7kgs

Accessories Included

- 1.5Ah Li-ion battery x2
- Quick charger
- Metal belt clip
- 25mm CR-V screwdriver bits (T20, T25, SL6 x2, PZ1 x2)
- Magnetic bit holder: 55mm
- HSS twist drill bits: Φ1.5mm, Φ2mm, Φ3mm, Φ4mm, Φ5mm, Φ6mm
- Battery cover x2



MPCD18HLi/2E | 112-0021

Cordless Hammer Drill



Features

- LED power indicator
- Quick - stop function
- Spindle lock function
- Two mechanical speed
- Full metal chuck with lock
- Forward / reverse rotation
- Variable speed
- LED light
- Hammer function

Specification

	Voltage: 18V
	No-Load speed: I 0-400/min II 0-1400/min
	Impact rate: I 0-6400bpm II 0-22400bpm
	Chuck capacity: 1.5-13mm
	Clutch settings: 18+2
	Battery capacity: 1.5Ah Li-ion
	Peak torque: 45N.m
	Charging time: 1hour
	Weight incl. battery: 1.6KG

Packing Details

- Size: 41.5x33.5x27.8cm / 4pcs
- G.W. / N.W.: 15kgs / 14kgs








Accessories Included

- 1.5Ah Li-ion battery x2
- Quick charger
- Metal belt clip
- 25mm CR-V screwdriver bits (PH1, PH2, PZ1, PZ2, SL5, SL6, T25, T30)
- Magnetic bit holder: 55mm
- HSS twist drill bits: Φ2x48mm, Φ2.5x56mm, Φ3x62mm, Φ4x75mm, Φ5x86mm, Φ6x92mm, Φ8x116mm, Φ10x132mm
- Battery cover x2



MPIS240V | 111-2000 Impact Driver









Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 240W
	No-load speed: 0-3600/min
	Impact rate: 0-4200bpm
	Peak torque: 100N.m
	Max screw diameter: 6.35mm
	Screw capacity: Wall: M12 Screw bolt: M8

Features	
<ul style="list-style-type: none">• 1/4" hex tool holder• LED light• Soft grip handle• Forward / reverse rotation• Variable speed• Easy to replace carbon brush	
Accessories Included	
<ul style="list-style-type: none">• 65 mm CR-V double ended screwdriver bit• Metal belt clip• Bit clamp• Extra Carbon brush x2	
Packing Details	
<ul style="list-style-type: none">• Size: 47.5x31.5x27cm / 8pcs• G.W. / M.W.: 13.5Kgs / 12.5kgs	

MPES500V | 111-1800 Electric Screwdriver









Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 500W
	No-load speed: 0-2500/min
	Peak torque: 50N.m
	Max screw diameter: 6.35mm
	Screw capacity: Wall: M6 Screw bolt: M5

Features	
<ul style="list-style-type: none">• 1/4" hex tool holder• Lock-on switch• Balance bubble• Forward / reverse rotation• Variable speed• Short positioning sleeve	
Accessories Included	
<ul style="list-style-type: none">• 25mm CR-V screwdriver bits(PH1,PH2,PZ1,PZ2,SL4,SL6)• Extra carbon brush x2	
Packing Details	
<ul style="list-style-type: none">• Size: 59x34x24.5cm / 8pcs• G.W. / N.W.: 17.5kgs / 16.5kgs	

MPED320VUF | 111-0200 Electric Drill









Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 320W
	No-load speed: 0-750/min
	Peak torque: 23N.m
	Chuck capacity: 0.8-10mm
	Clutch settings: 16+1

Features	
<ul style="list-style-type: none">• Soft grip handle• Powder metallurgy gear• Lock-on switch• LED light• Easy to replace carbon brush• Forward reverse rotation• Variable speed	
Accessories Included	
<ul style="list-style-type: none">• Extra carbon brushx2• 65 mm CR-V double ended screwdriver bit	
Packing Details	
<ul style="list-style-type: none">• Size: 42.5x28x50cm / 10pcs• G.W. / N.W.: 18.4kgs / 17.4kgs	

MPED300VD | 111-0205 Electric Drill







Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 300W
	No-load speed: I 0-450/min II 0-1350/min
	Peak torque: 32N.m
	Chuck capacity: 0.8-10mm
	Clutch settings: 19+1

Features	
<ul style="list-style-type: none">• Two mechanical speed• Powder metallurgy gear• Lock-on switch• LED light• Easy to replace carbon brush• Forward reverse rotation• Variable speed• Soft grip handle	
Accessories Included	
<ul style="list-style-type: none">• Extra carbon brushx2• 65 mm CR-V double ended screwdriver bit	
Packing Details	
<ul style="list-style-type: none">• Size: 58x39.5x27.5cm / 10pcs• G.W. / N.W.: 19.5kgs / 18.5kgs	

MPED321V | 111-0206 Electric Drill



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 320W
	No-load speed: 0-4200/min
	Chuck capacity: 0.6-6.5mm

Features	
<ul style="list-style-type: none">• Lock-on switch• Compact design• Metal chuck with key• Forward reverse rotation• Variable speed	
Accessories Included	
<ul style="list-style-type: none">• Chuck key	
Packing Details	
<ul style="list-style-type: none">• Size: 47.5x34.5x23.5cm / 10pcs• G.W. / N.W.: 14.5kgs / 13.5kgs	

MPED450V | 111-0203 Electric Drill



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 450W
	No-load speed: 0-2700/min
	Chuck capacity: 0.8-10mm
	Drilling capacity: Wood: Ø18mm Steel: Ø8mm

- ### Features
- Soft grip handle
 - Lock-on switch
 - With practical belt clip
 - Metal chuck with key
 - Forward reverse rotation
 - Variable speed

- ### Accessories Included
- Chuck key

- ### Packing Details
- Size: 56x34x30.5cm / 8pcs
 - G.W. / N.W.: 16.5kgs / 15.5kgs

MPED450VF | 111-0204 Electric Drill



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 450W
	No-load speed: 0-2700/min
	Chuck capacity: 0.8-10mm
	Drilling capacity: Wood: Ø18mm Steel: Ø8mm

- ### Features
- Soft grip handle
 - Lock-on switch
 - With practical belt clip
 - 2-sleeve keyless chuck
 - Forward reverse rotation
 - Variable speed

- ### Accessories Included
- 65mm CR-V double ended screwdriver bit

- ### Packing Details
- Size: 56x34x30.5cm / 8pcs
 - G.W. / N.W.: 16.5kgs / 15.5kgs

MPID600V1 | 111-0308 Hammer Drill



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 600W
	No-load speed: 0-2800/min
	Impact rate: 0-44800bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: Ø25mm Steel: Ø8mm Concrete: Ø10mm

- ### Features
- Soft grip handle
 - Lock-on switch
 - Metal chuck with key
 - Forward reverse rotation
 - Variable speed

- ### Accessories Included
- Auxiliary handle
 - Metal depth gauge
 - Chuck key

- ### Packing Details
- Size: 52x30.5x31cm / 6pcs
 - G.W. / N.W.: 16.5kgs / 15.5kgs

MPID710V | 111-0300 Hammer Drill



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 710W
	No-load speed: 0-2800/min
	Impact rate: 0-44800bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: Ø25mm Steel: Ø13mm Concrete: Ø13mm

- ### Features
- Soft grip handle
 - Lock-on switch
 - Metal chuck with key
 - Forward reverse rotation
 - Anti-vibration auxiliary handle
 - Variable speed

- ### Accessories Included
- Anti vibration auxiliary handle
 - Metal depth gauge
 - Chuck key

- ### Packing Details
- Size: 50.5x35x27.5cm / 6pcs
 - G.W. / N.W.: 16kgs / 15kgs

MPID710V2 | 111-0309 Hammer Drill



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 710W
	No-load speed: 0-2800/min
	Impact rate: 0-44800bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: Ø27mm Steel: Ø10mm Concrete: Ø12mm

- ### Features
- Soft grip handle
 - Lock-on switch
 - Metal chuck with key
 - Forward reverse rotation
 - Variable speed

- ### Accessories Included
- Auxiliary handle
 - Metal depth gauge
 - Chuck key

- ### Packing Details
- Size: 51x29.5x31cm / 6pcs
 - G.W. / N.W.: 16.5kgs / 15.5kgs

MPID850V | 111-0301 Hammer Drill



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 850W
	No-load speed: 0-2700/min
	Impact rate: 0-43200bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: Ø35mm Steel: Ø13mm Concrete: Ø16mm

- ### Features
- Soft grip handle
 - Lock-on switch
 - Metal chuck with key
 - Forward reverse rotation
 - Anti-vibration auxiliary handle
 - Aluminium gearbox
 - Variable speed

- ### Accessories Included
- Anti vibration auxiliary handle
 - Metal depth gauge
 - Chuck key

- ### Packing Details
- Size: 51.5x36x28.5cm / 6pcs
 - G.W. / N.W.: 19.5kgs / 18.5kgs

MPID850V1 | 111-0306 Hammer Drill



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 850W
	No-load speed: 0-2700/min
	Impact rate: 0-44800bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: Ø30mm Steel: Ø12mm Concrete: Ø14mm

Features	
<ul style="list-style-type: none">• Soft grip handle• Lock-on switch• Metal chuck with key• Forward reverse rotation• Aluminium gearbox• Variable speed	
Accessories Included	
<ul style="list-style-type: none">• Auxiliary handle• Metal depth gauge• Chuck key	
Packing Details	
<ul style="list-style-type: none">• Size: 51.5x34.5x28.5cm / 6pcs• G.W. / N.W.: 19kgs / 18kgs	

MPID850VD | 111-0307 Hammer Drill



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 850W
	No-load speed: I 0-1100/min II 0-2800/min
	Impact rate: I 0-17600bpm II 0-48000bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: I 40mm II 25mm Steel: I 13mm II 8mm Concrete: I 16mm II 13mm

Features	
<ul style="list-style-type: none">• Soft grip handle• Lock-on switch• Metal chuck with key• Aluminium gearbox• Two mechanical speed• Reverse function with speed limitation• Variable Speed	
Accessories Included	
<ul style="list-style-type: none">• Auxiliary handle• Metal depth gauge• Chuck key	
Packing Details	
<ul style="list-style-type: none">• Size: 49x37.5x29.5cm / 6pcs• G.W. / N.W.: 21kgs / 20kgs	

MPID1050VD | 111-0302 Hammer Drill



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 1050W
	No-load speed: I 0-1100/min II 0-2800/min
	Impact rate: I 0-16000bpm II 0-48000bpm
	Chuck capacity: 1.5-13mm
	Drilling capacity: Wood: I 40mm II 25mm Steel: I 13mm II 8mm Concrete: I 20mm II 13mm

Features	
<ul style="list-style-type: none">• Lock-on switch• Metal chuck with key• Forward reverse rotation• Anti-vibration auxiliary handle• Aluminium gearbox• Two mechanical speed• Variable speed	
Accessories Included	
<ul style="list-style-type: none">• Anti vibration auxiliary handle• Depth gauge• Chuck key	
Packing Details	
<ul style="list-style-type: none">• Size: 37.5x36x28.7cm / 4pcs• G.W. / N.W.: 14kgs / 13kgs	

MPRH620/24V | 111-0907 Rotary Hammer



Features	
<ul style="list-style-type: none">• Forward / reverse rotation• 360° rotate and lock chisel• Reverse function with speed limitation• Overload safety clutch• Three function drilling• Anti-vibration handle• SDS-PLUS• Variable speed• Lock-on switch	

MPRH800/26V | 111-0908 Rotary Hammer



Features	
<ul style="list-style-type: none">• Forward / reverse rotation• 360° rotate and lock chisel• Reverse function with speed limitation• Overload safety clutch• Three function drilling• Anti-vibration handle• SDS-PLUS• Variable speed• Lock-on switch	

Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 620W
	No-load speed: 0-1000/min
	Impact rate: 0-6400bpm
	Chuck capacity: 10mm
	Max Impact energy: 2.5J
	Max hole diameter in wood: Ø30mm Max hole diameter in concrete: Ø24mm Max hole diameter in steel: Ø13mm

Packing Details	
<ul style="list-style-type: none">• Size: 41.5x36.5x33cm / 3pcs• G.W. / N.W.: 16kgs / 15kgs	
Accessories Included	
<ul style="list-style-type: none">• Anti-vibration auxiliary handle• Depth gauge• Flat chisel: Ø14x20x250mm• Point chisel: Ø14x250mm• SDS drill bits: Ø6/Ø8/Ø10x160mm	



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 800W
	No-load speed: 0-1200/min
	Impact rate: 0-5600bpm
	Chuck capacity: 10mm
	Max impact energy: 2.8J
	Max hole diameter in wood: Ø30mm Max hole diameter in concrete: Ø26mm Max hole diameter in steel: Ø13mm

Packing Details	
<ul style="list-style-type: none">• Size: 43.5x39.5x32.5cm / 3pcs• G.W. / N.W.: 17kgs / 16kgs	
Accessories Included	
<ul style="list-style-type: none">• Anti-vibration auxiliary handle• Depth gauge• Flat chisel: Ø14x20x250mm• Point chisel: Ø14x250mm• SDS drill bits: Ø6/Ø8/Ø10x160mm	



MPRH900/26V | 111-0909 Rotary Hammer



Features

- Anti-vibration front handle
- Aluminium gearbox
- Anti-vibration real handle
- Easy to replace carbon brush
- Overload safety clutch
- Three function drilling
- Variable speed
- SDS-PLUS

Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 900W

No-load speed: 0-850/min

Impact rate: 0-4100bpm

Chuck capacity: 10mm

Max impact energy: 3.5J

Max hole diameter in wood: Ø40mm
Max hole diameter in concrete: Ø26mm
Max hole diameter in steel: Ø13mm

Packing Details

- Size: 46x26.5x34.6cm / 2pcs
- G.W. / N.W.: 15.5kgs / 14.5kgs

Accessories Included

- Anti-vibration auxiliary handle
- Depth gauge
- Extra 13mm key chuck
- Chuck key + Chuck adaptor
- Dust cap
- Extra carbon brush×2
- Greasepot
- Wrench
- Flat chisel: Ø14×20×250mm
- Point chisel: Ø14×250mm
- SDS drill bits: Ø8/Ø10/Ø12×160mm



MPRH1500/32V | 111-0914 Rotary Hammer



Features

- Anti-vibration front handle
- Anti-vibration real handle
- Overload safety clutch
- Three function drilling
- Variable speed
- SDS-PLUS

Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 1500W

No-load speed: 0-880/min

Impact rate: 0-4350bpm

Chuck capacity: 10mm

Max impact energy: 5.5J

Max hole diameter in wood: Ø40mm
Max hole diameter in concrete: Ø32mm
Max hole diameter in steel: Ø13mm

Packing Details

- Size: 46.5x27.4x36.5cm / 2pcs
- G.W. / N.W.: 16kgs / 15kgs

Accessories Included

- Anti-vibration auxiliary handle
- Dust cap
- Extra carbon brush×2
- Greasepot
- Wrench
- Flat chisel: Ø14×20×250mm
- Point chisel: Ø14×250mm
- Drill bits: 8/10/12×160mm



MPRH1100/28 | 111-0913 Rotary Hammer



Features

- Aluminium gearbox
- Overload safety clutch
- Three function drilling
- Anti-vibration handle
- SDS-PLUS

Specification

Voltage: 220-230V~ 50/60Hz

Rated power input: 1100W

No-load speed: 900/min

Impact rate: 0-4500bpm

Chuck capacity: 10mm

Max impact energy: 5.0J

Max hole diameter in wood: Ø36mm
Max hole diameter in concrete: Ø28mm
Max hole diameter in steel: Ø13mm

Packing Details

- Size: 46.5x27.4x36.5cm / 2pcs
- G.W. / N.W.: 16kgs / 15kgs

Accessories Included

- Anti-vibration auxiliary handle
- Depth gauge
- Dust cap
- Extra carbon brush×2
- Greasepot
- Wrench
- Flat chisel: Ø14×20×250mm
- Point chisel: Ø14×250mm
- SDS drill bits: Ø8/Ø10/Ø12×160mm



MPRH1200/38 | 111-0912 Rotary Hammer



Features

- Anti-vibration front handle
- Anti-vibration real handle
- Overload safety clutch
- Two function drilling
- Aluminium gearbox
- SDS-MAX

Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 1200W

No-load speed: 550/min

Impact rate: 0-3780bpm

Chuck capacity: 18mm

Max impact energy: 9.0J

Max hole diameter in concrete: Ø38mm

Packing Details

- Size: 45.5x27.7x37.7cm / 2pcs
- G.W. / N.W.: 20kgs / 19kgs

Accessories Included

- Anti-vibration auxiliary handle
- Dust cap
- Extra carbon brush×2
- Greasepot
- Wrench
- Point chisel: Ø18×350mm
- Drill bit: Ø16×340mm



MPDH1100 | 111-1002 Demolition Hammer



Features

- Lock-on switch
- Aluminium gearbox
- Easy to replace carbon brush
- SDS-HEX
- Anti-vibration handle

Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 1100W

Impact frequency: 0-3900bpm

Max impact energy: 15J

Tool holder: 17mm internal hexagon

Accessories Included

- Anti-vibration auxiliary handle
- Greasepot
- Flat chisel: Ø17×22×280mm
- Point chisel: Ø17×280mm
- Spanner
- Extra carbon brush×2

Packing Details

- Size: 45.5x29x37cm / 2pcs
- G.W. / N.W.: 19kgs / 18kgs



MPDH1500 | 111-1000 Demolition Hammer



Features

- Lock-on switch
- Aluminium body
- Easy to replace carbon brush
- SDS-HEX
- Oil lubrication

Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 1500W

Impact frequency: 0-1400bpm

Max impact energy: 45J

Tool holder: 30mm internal hexagon

Packing Details

- Size: 73x19.7x39.2cm / 1pc
- G.W. / N.W.: 21kgs / 20kgs

Accessories Included

- Greasepot
- Flat chisel: Ø30×35×400mm
- Point chisel: Ø30×400mm
- Hexagon wrench ×2
- Spanner
- Extra carbon brush×2








GRINDERS

Each Maxpro angle grinder has gone through rigorous test and inspection procedures, to strive for long life use under different circumstances and achieve maximum customer satisfaction

MPAG681/125 | 111-0041
Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 680W
	No-load speed: 11000/min
	Disc size: 115mm / 125mm
	Spindle thread: M14

Features

- Slim body

Accessories Included






- Auxiliary handle
- Wrench

Packing Details

- Size: 38.5x30x35cm / 6pcs
- G.W. / N.W.: 15kgs / 14kgs

MPAG760/100 | 111-0046
MPAG760/115 | 111-0032
Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 760W
	No-load speed: 11000/min
	Disc size: 100mm / 115mm / 125mm
	Spindle thread: M10 / M14

Features

- Slim body

Accessories Included






- Auxiliary handle
- Wrench
- Extra carbon brush x2

Packing Details

- Size: 38x35x26cm / 6pcs
- G.W. / N.W.: 14.5kgs / 13.5kgs

MPAG760/125Q | 111-0048
Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 760W
	No-load speed: 11000/min
	Disc size: 125mm
	Spindle thread: M14

Features

- Slim body

Accessories Included






- Auxiliary handle
- Wrench
- Extra carbon brush x2

Packing Details

- Size: 38x35x26cm / 6pcs
- G.W. / N.W.: 14.5kgs / 13.5kgs

MPAG760/100R | 111-0030
Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 760W
	No-load speed: 11000/min
	Disc size: 100mm
	Spindle thread: M10

Features

- Slim body
- Rear switch

Accessories Included






- Auxiliary handle
- Wrench
- Extra carbon brush x2

Packing Details

- Size: 39x33.5x25.5cm / 6pcs
- G.W. / N.W.: 14.5kgs / 13.5kgs

MPAG950/115 | 111-0036
Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 950W
	No-load speed: 11000/min
	Disc size: 125mm
	Spindle thread: M14

Features

- Slim body

Accessories Included






- Auxiliary handle
- Wrench
- Extra carbon brush x2

Packing Details

- Size: 39x33.5x25.5cm / 6pcs
- G.W. / N.W.: 15-15.5kgs / 14-14.5kgs

MPAG950/100R | 111-0034
Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 950W
	No-load speed: 11000/min
	Disc size: 100mm
	Spindle thread: M10

Features

- Slim body
- Rear switch

Accessories Included

- Auxiliary handle
- Wrench
- Extra carbon brush x2

Packing Details

- Size: 39x33.5x26cm / 9pcs
- G.W. / N.W.: 15kgs / 14kgs

MPAG950/115VQ | 111-0050
MPAG950/125VQ | 111-0051
 Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 950W
	No-load speed: 3000-11000/min
	Disc size: 115mm / 125mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Quick-release guard • Variable speed

Accessories Included

- Anti-vibration auxiliary handle
- Wrench
- Extra carbon brush x2
- Quick-release guard

Packing Details

- Size: 39x33.5x25.5cm / 6pcs
- G.W. / N.W.: 15.5kgs / 14.5kgs

MPAG950/125Q | 111-0005
 Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 950W
	No-load speed: 11000/min
	Disc size: 125mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Lock-off switch • Quick-release guard • Soft grip handle

Accessories Included

- Anti-vibration auxiliary handle
- Wrench
- Quick-release guard

Packing Details

- Size: 46x41x26cm / 6pcs
- G.W. / N.W.: 19.3Kgs / 18.3kgs

MPAG950/125Q1 | 111-0049
 Angle Grinder



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 950W
	No-load speed: 11000/min
	Disc size: 125mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Slim body

Accessories Included

- Auxiliary handle
- Wrench
- Extra carbon brushx2

Packing Details

- Size: 39x33.5x25.5cm / 6pcs
- G.W. / N.W.: 15-15.5kgs / 14-14.5kgs

MPAG951/100L | 111-0043
MPAG951/115L | 111-0044
MPAG951/125L | 111-0045
 Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 950W
	No-load speed: 11000/min
	Disc size: 100mm / 115mm / 125mm
	Spindle thread: M10 / M14

Features
<ul style="list-style-type: none"> • Easy to replace carbon brush • Lock-on switch

Accessories Included

- Auxiliary handle
- Extra carbon brushx2
- Wrench

Packing Details

- Size: 41.5x39x26cm / 6pcs
- G.W. / N.W.: 15.5-16kgs / 14.5-15kgs

MPAG1350/150Q | 111-0002
 Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1350W
	No-load speed: 9000/min
	Disc size: 150mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Lock-off switch • Quick-release guard • Easy to replace carbon brush

Accessories Included

- Anti-vibration auxiliary handle
- Extra carbon brushx2
- Quick-release guard
- Wrench

Packing Details

- Size: 48.5x26x26.5cm / 4pcs
- G.W. / N.W.: 15.5kgs / 14.5kgs

MPAG2000/180QG | 111-0003
 Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2000W
	No-load speed: 8500/min
	Disc size: 180mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Quick-release guard • Rear handle rotates 90° left or right • Soft start switch • Lock-off switch • Easy to replace carbon brush

Accessories Included

- Anti-vibration auxiliary handle
- Extra carbon brushx2
- Quick-release guard
- Wrench

Packing Details

- Size: 55x27x19cm / 2pcs
- G.W. / N.W.: 11.5kgs / 10.5kgs

MPAG2400/230L | 111-0052

Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2400W
	No-load speed: 6000/min
	Disc size: 230mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Rear handle rotates 90° left or right • Lock-on switch • Easy to replace carbon brush

Accessories Included
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Extra carbon brush×2 • Wrench

Packing Details
<ul style="list-style-type: none"> • Size: 53.5x34x19.5cm / 2pcs • G.W. / N.W.: 15kgs / 14kgs

MPAG2400/230G | 111-0053

Angle Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2400W
	No-load speed: 6000/min
	Disc size: 230mm
	Spindle thread: M14

Features
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Rear handle rotates 90° left or right • Soft start switch • Lock-off switch • Easy to replace carbon brush

Accessories Included
<ul style="list-style-type: none"> • Anti-vibration auxiliary handle • Extra carbon brush×2 • Wrench

Packing Details
<ul style="list-style-type: none"> • Size: 53.5x34x19.5cm / 2pcs • G.W. / N.W.: 15kgs / 14kgs

MPP01200/180V | 111-0102

Polisher



Features
<ul style="list-style-type: none"> • Velcro-type fastening • Easy to replace carbon brush • Anti vibration handle • Variable speed

Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1200W
	No-load speed: 1000-3000/min
	Pad size: 180mm
	Spindle thread: M14

Packing Details
<ul style="list-style-type: none"> • Size: 49x38x22cm / 4pcs • G.W. / N.W.: 16kgs / 14kgs

Accessories Included
<ul style="list-style-type: none"> • G-Handle • Anti vibration auxiliary handle • Polishing pad • Wool felt + Sponge pad • Sanding paper(120 grit) • Extra carbon brush×2 • Wrench



MPRS300V | 111-0506

Random Orbit Sander



Features
<ul style="list-style-type: none"> • Velcro-type baseplate • Dust extraction • Dust-proof switch • Soft grip handle • Variable speed

Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 300W
	No-load speed: 5000-12000/min
	Orbital stroke rate: 10000-24000/min
	Sanding plate diameter: Ø125mm

Packing Details
<ul style="list-style-type: none"> • Size: 44.5x28x34.5cm / 8pcs • G.W. / N.W.: 15kgs / 14kgs

Accessories Included
<ul style="list-style-type: none"> • Dust bag • Sanding paper×5 (60,80,100,120,180grit)



MPRS300V1 | 111-0509

Random Orbit Sander



Features
<ul style="list-style-type: none"> • Velcro-type baseplate • Dust extraction • Dust-proof switch • Soft grip handle • Variable speed

Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 300W
	No-load speed: 4000-12000/min
	Orbital stroke rate: 10000-24000/min
	Sanding plate diameter: Ø125mm

Packing Details
<ul style="list-style-type: none"> • Size: 56x27.5x35cm / 8pcs • G.W. / N.W.: 15kgs / 14kgs

Accessories Included
<ul style="list-style-type: none"> • Dust bag • Sanding paper×5 (60,80,100,120,180grit)



Sanders & Planers

MPPS230 | 111-0505 Sheet Palm Sander



Features

- Aluminium baseplate
- Dust-proof switch
- Dust extraction
- Soft grip handle

MPFS250VQ | 111-0504 Sheet Finishing Sander



Features

- Aluminium baseplate
- Soft grip handle
- Dust extraction
- Variable speed
- Dust-proof switch

MPBS900/457V | 111-0508 Belt Sander



Features

- Powerful and robust belt sander
- Soft grip handle
- Dust extraction
- Variable speed

Specification

Voltage: 220-240V ~ 50/60Hz

Rated power input: 230W

No-load speed: 13500/min

No-load orbital stroke rate: 27000/min

Sanding plate size: 100x115 mm

Packing Details

- Size: 44.5x28x34.5cm / 8pcs
- G.W. / N.W.: 14.5kgs / 13.5kgs

Accessories Included

- Dust bag
- Sanding paper x5 (60,80,100,120,180grit)



Specification

Voltage: 220-240V ~ 50Hz

Rated power input: 250W

No-load speed: 6000-11000/min

No-load orbital stroke rate: 12000-22000/min

Sanding plate size: 90x187 mm

Packing Details

- Size: 51x35x40cm / 8pcs
- G.W. / N.W.: 18.4kgs / 17.4kgs

Accessories Included

- Dust bag
- Sanding paper x5 (60,80,100,120,180grit)



Specification

Voltage: 220-240V/50Hz

Input power: 900W

No-load speed: 0-320m/min

Sanding surface: 76x120mm

Belt size: 76x457mm

Accessories Included

- Dust bag
- Extra belt x1
- Sanding belt x5 (60,80,120,150,240grit)

Packing Details

- Size: 37x35.5x35.5cm / 4pcs
- G.W. / N.W.: 14.5kgs / 13.5kgs



Sanders & Planers

MPPL500/1 | 111-0404 Planer



MPPL620/2.5 | 111-0405 Planer



MPPL900/3DR1 | 111-0403 Planer



Specification

Voltage: 220-240V ~ 50/60Hz

Rated power input: 500W

No-load speed: 16000/min

Adjustable chip thickness: 0-1mm

Planing width: 82mm

Features

- Aluminium side cover
- Cutting depth adjustment
- Dust extraction
- Soft grip handle
- Re-sharpenable blades

Accessories Included

- Parallel gauge
- Sharpening holder assembly
- Blade gauge assembly
- Socket wrench
- Extra belt x1

Packing Details

- Size: 34x32x36cm / 4pcs
- G.W. / N.W.: 13.6kgs / 12.6kgs

Specification

Voltage: 220-240V ~ 50/60Hz

Rated power input: 620W

No-load speed: 16000/min

Adjustable chip thickness: 0-2.5mm

Planing width: 82mm

Features

- Aluminium side cover
- Cutting depth adjustment
- Dust extraction
- Soft grip handle
- Re-sharpenable blades

Accessories Included

- Parallel gauge
- Sharpening holder assembly
- Blade gauge assembly
- Socket wrench
- Extra belt x1

Packing Details

- Size: 34x32x36cm / 4pcs
- G.W. / N.W.: 13.75kgs / 12.75kgs

Specification

Voltage: 220-240V ~ 50/60Hz

Rated power input: 900W

No-load speed: 16000/min

Adjustable chip thickness: 0-3mm

Adjustable rebating depth: 0-16mm

Planing width: 82mm

Features

- Two side dust removal system
- Aluminium side cover
- Cutting depth adjustment
- Dust extraction
- Soft grip handle
- Disposable blades

Accessories Included

- Parallel gauge
- Depth gauge
- Extra belt x1
- Dust extraction bag

Packing Details

- Size: 38x35.5x42cm / 4pcs
- G.W. / N.W.: 17.5kgs / 16.5kgs

MPJS600VQ | 111-0602

Jig Saw



Features

- Tool-free blade change system
- Soft grip handle
- 4-stage pendulum stroke adjustment
- Variable speed
- Lock-on switch

Specification

- Voltage: 220-240V~ 50Hz
- Rated power input: 600W
- No-load stroke rate: 500-3000/min
- Cutting capacity: Wood: 65mm
Plastic: 30mm
Steel: 8mm
- Bevel capacity: 0±45°

Packing Details

- Size: 51.5x29x24cm / 6pcs
- G.W. / N.W.: 16kgs / 15kgs

Accessories Included

- Blade×3
100×8×1.5mm(wood)
100×8×1.5mm(plastic)
76×8×1.4mm(steel)
- Wrench
- Dust extraction tube



MPJS800VLQ | 111-0603

Jig Saw



Features

- Tool-free blade change system
- Aluminium baseplate
- 4-stage pendulum stroke adjustment
- Variable speed
- AC Laser guidance
- Lock-on switch

Specification

- Voltage: 220-240V~ 50Hz
- Rated power input: 800W
- No-load stroke rate: 500-3000/min
- Cutting capacity: Wood: 80mm
Plastic: 35mm
Steel: 10mm
- Bevel capacity: 0±45°

Packing Details

- Size: 41*40*30.5cm / 4pcs
- G.W. / N.W.: 16.2kgs / 15.2kgs

Accessories Included

- Blade×3
152×8×1.5mm(wood)
100×8×1.5mm(plastic)
76×8×1.4mm(steel)
- Parallel gauge
- Wrench
- Dust extraction tube



CIRCULAR SAW

Maxpro series of circular saws come with adjustable baseplate, AC laser function and special designed guard. They will make your jobs easier.



MPCS1200/185 | 111-0704

Circular Saw



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 1200W
	No-load speed: 5500/min
	Saw blade diameter: Ø185mm
	Cutting depth range at 90°: 0-65mm Cutting depth range at 45°: 0-42mm

- ### Features
- Angular adjustment
 - Cutting depth adjustment
 - Soft grip
 - Baseplate working angle- max 45°
 - Easy to replace carbon brush

- ### Accessories Included
- Blade Ø185x2.2xØ20mmx30T,7000/min
 - Parallel gauge
 - Wrench

- ### Packing Details
- Size: 72.5x37x27.5cm / 3pcs
 - G.W. / N.W.: 14.5kgs / 13.5kgs

MPCS1300/185L | 111-0702

Circular Saw



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 1300W
	No-load speed: 4700/min
	Saw blade diameter: Ø185mm
	Cutting depth range at 90°: 0-65mm Cutting depth range at 45°: 0-45mm

- ### Features
- AC Laser guidance
 - Angular adjustment
 - Cutting depth adjustment
 - Soft grip
 - Baseplate working angle- max 45°

- ### Accessories Included
- Blade Ø185x2.2xØ20mmx30T,7000/min
 - Parallel gauge
 - Wrench

- ### Packing Details
- Size: 77x34.5x27.3cm / 3pcs
 - G.W. / N.W.: 16.5kgs / 15.5kgs

MPCS1500/190L | 111-0703

Circular Saw



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 1500W
	No-load speed: 5000/min
	Saw blade diameter: Ø190mm
	Cutting depth range at 90°: 0-65mm Cutting depth range at 45°: 0-44mm

- ### Features
- AC Laser guidance
 - Angular adjustment
 - Cutting depth adjustment
 - Aluminium baseplate
 - Soft grip
 - Baseplate working angle- max 45°

- ### Accessories Included
- Blade Ø190x2.2xØ20mmx30T,7000/min
 - Parallel gauge
 - Wrench

- ### Packing Details
- Size: 52x35.5x52.5cm / 4pcs
 - G.W. / N.W.: 23kgs / 22kgs

MPMC1250/110 | 111-0801

Marble Cutter



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 1250W
	No-load speed: 13800/min
	Blade diameter: Ø110xØ20x2mm
	Cutting depth range at 0°: 0-33.5mm Cutting depth range at 45°: 0-28.5mm

- ### Features
- Lock-on switch
 - Angular adjustment
 - Cutting depth adjustment
 - Easy to replace carbon brush
 - Baseplate working angle- max 45°

- ### Accessories Included
- Water tube
 - Water tube head
 - Plastic valve
 - Cocket wrench
 - Spanner
 - Extra carbon brushx2

- ### Packing Details
- Size: 45x27.5x40cm / 4pcs
 - G.W. / N.W.: 16kgs / 15kgs

MPER2100/12V | 111-1600

Electric Router



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2100W
	No-Load speed: 8000-23500/min
	Max.plunge depth:50mm
	Collet size :12mm

- ### Features
- Soft start
 - 6 speed setting
 - Cutting depth regulator
 - Quick-changing chuck
 - Complete aluminum baseplate

- ### Accessories Included
- Parallel guide pillarx2
 - Wrench
 - Template
 - Straight-line cutter guide
 - Colletx3 (6mm,8mm,12mm)

- ### Packing Details
- Size: 36x32x31.5cm / 2pcs
 - G.W. / N.W.: 15.5kgs / 14.5kgs

MPWT550/6 | 111-1601

Wood Trimmer



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 550W
	No-Load speed: 35000/min
	Collet size: 6mm

- ### Features
- Accurate depth adjustment
 - Aluminum body
 - Easy to replace carbon brush

- ### Packing Details
- Size: 53x32x28cm / 6pcs
 - G.W. / N.W.: 13kgs / 12kgs

- ### Accessories Included
- Guide pillar
 - Guide board
 - Template
 - Wrenchx2
 - Extra carbon brushx2



MPBCO355 | 113-0100
Cut-Off Saw



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2200W
	No-load speed: 3800/min
	Cutting disc diameter: Ø355mm
	Max cutting capacity at 0°: Round pipe: 110mm Square: 110×110mm Rectangle: H110×W150mm Max cutting capacity at 45°: Round pipe: 100mm Square: 100×100mm Rectangle: H100×W130mm

Features

- Copper wire motor
- Cutting depth limiter bolt
- Large sized spark guard
- 45° adjustable guide plate
- lock-on switch
- Easy to replace carbon brush

Accessories Included

- Blade Ø355×3.2×Ø25.4mm
- Spanner
- Extra carbon brush×2

Packing Details

- Size: 53.5x31x43.5cm / 1pc
- G.W. / N.W.: 18kgs / 17kgs

MPBMS255LS | 113-0303
Miter Saw



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2000W
	No-load speed: 5000/min
	Saw blade diameter: Ø255mm
	Cutting capacity: 0°/0° H70×W305mm 45°/0° H70×W210mm 0°/45° H40×W305mm 45°/45° H40×W210mm
	Bevel setting: 0~45° Left

Features

- Copper wire motor
- AC laser guidance
- Single bevel with sliding
- Dust extraction adapter with dust bag
- Maximun bevel angle left

Accessories Included

- Blade Ø255×2.5×Ø25.4mm×30T,7000/min
- Dust bag
- Wood clamp
- Extension wing x2
- Wrench
- Adapter gasket

Packing Details

- Size: 79x48x40cm / 1pc
- G.W. / N.W.: 16.5kgs / 15.5kgs

MPBMS255L | 113-0302
Miter Saw



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1800W
	No-load speed: 4500/min
	Saw blade diameter: Ø255mm
	Cutting capacity: 0°/90° H75×W135 mm 0°/45° H45×W135 mm 45°/90° H75×W95 mm 45°/45° H45×W95 mm
	Bevel setting: 0~45° Left

Features

- Copper wire motor
- Die-cast aluminium work table
- AC laser guidance
- Easy to replace carbon brush
- Dust extraction adapter with dust bag

Accessories Included

- Blade Ø255×2.5×Ø25.4mm×30T,7000/min
- Working clamp
- Extension wings×2
- Dust bag
- Extra carbon brush×2
- Wrench
- Adapter gasket

Packing Details

- Size: 54x39x39.5cm / 1pc
- G.W. / N.W.: 12.5kgs / 10.5kgs

MPBMS210 | 113-0300
Miter Saw



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1400W
	No-load speed: 5000/min
	Saw blade diameter: Ø210mm
	Cutting capacity: 0°/90° H55×W120 mm 0°/45° H32×W120 mm 45°/90° H55×W80 mm 45°/45° H32×W80 mm
	Bevel setting: 0~45° Left

Features

- Copper wire motor
- Die-cast aluminium work table
- Easy to replace carbon brush
- Dust extraction adapter with dust bag

Accessories Included

- Blade Ø210×2.5×Ø25.4mm×30T,7000/min
- Working clamp
- Extension wings×2
- Side support
- Dust bag
- Extra carbon brush×2
- Wrench
- Adapter gasket

Packing Details

- Size: 49x30x29cm / 1pc
- G.W. / N.W.: 8.4kgs / 7.4kgs

MPBTS254L | 113-0400
Table Saw



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1500W
	No-load speed: 4500/min
	Saw blade diameter: Ø254mm
	Cutting capacity: 45°: 55mm 90°: 80mm

Features
<ul style="list-style-type: none"> Copper wire motor DC laser guidance Extension tables on 3 sides Blade swivel device with integrated angle scale Parallel guide Maximun bevel angle left
Accessories Included
<ul style="list-style-type: none"> Blade Ø254×2.8×Ø16mm×40T,7000/min Extension table×3 Parallel gauge Angle gauge Push stick Wrench Spanner×2 Adapter gasket
Packing Details
<ul style="list-style-type: none"> Size: 74x62x37cm / 1pc G.W. / N.W.: 31kgs / 30kgs

MPBTS254 | 113-0401
Table Saw



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1500W
	No-load speed: 4800/min
	Saw blade diameter: Ø254mm
	Cutting capacity: 45°: 55mm 90°: 87mm

Features
<ul style="list-style-type: none"> Copper wire motor DC laser guidance Extension tables on 3 sides Blade swivel device with integrated angle scale Parallel guide Maximun bevel angle left
Accessories Included
<ul style="list-style-type: none"> Blade Ø254×2.8×Ø16mm×40T,7000/min Extension table×3 Parallel gauge Angle gauge Push stick Wrench Spanner×2 Adapter gasket
Packing Details
<ul style="list-style-type: none"> Size: 67x57x31cm / 1pc G.W. / N.W.: 21.5kgs / 22.5kgs

MPBDP13 | 113-0200
Drill Press



Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 350W
	No-load speed: 580-2650/min (5 Speed)
	Chuck capacity: 1.5-13mm
	Spindle travel: 50mm
	Max distance axis to surface of column: 104mm

Features
<ul style="list-style-type: none"> Height adjustment Foldable guard Induction motor 5 speed setting Stable baseplate with slots
Accessories Included
<ul style="list-style-type: none"> Chuck: 1.5-13mm Chuck key Wrench×2
Packing Details
<ul style="list-style-type: none"> Size: 45.5x35.5x22.5cm / 1pc G.W. / N.W.: 15.8kgs / 14.8kgs

MPBDP16 | 113-0201
Drill Press



Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 500W
	No-load speed: 280-2350/min (9 Speed)
	Chuck capacity: 1.5-16mm
	Spindle travel: 50mm
	Max distance axis to surface of column: 115mm

Features
<ul style="list-style-type: none"> Height adjustment Foldable guard Induction motor 9 speed setting Stable baseplate with slots
Accessories Included
<ul style="list-style-type: none"> Chuck: 1.5-16mm Chuck key Wrench×2
Packing Details
<ul style="list-style-type: none"> Size: 52x38x25cm / 1pc G.W. / N.W.: 19.5kgs / 18.5kgs

MPBDP500 | 113-0202
Drill Press



Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 500W
	No-load speed: 280-1450/min (9 Speed)
	Chuck capacity: 1.5-16mm
	Spindle travel: 50mm
	Max distance axis to surface of column: 115mm

Features
<ul style="list-style-type: none"> Height adjustment Foldable guard Induction motor 9 speed setting Stable baseplate with slots
Accessories Included
<ul style="list-style-type: none"> Chuck: 1.5-16mm Chuck key Wrench×2
Packing Details
<ul style="list-style-type: none"> Size: 49x36.5x25cm / 1pc G.W. / N.W.: 18.2kgs / 17.0kgs

MPPB400 | 111-1102
Portable Blower



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 400W
	No-load speed: 14000/min
	Volumetric flow rate: 3.0 m³/min

Features
<ul style="list-style-type: none"> Dust extraction Strong filter Easy to replace carbon brush Lock-on switch
Accessories Included
<ul style="list-style-type: none"> Suction tube Dust bag Extra carbon brush×2
Packing Details
<ul style="list-style-type: none"> Size: 39x24x39cm / 4pcs G.W. / N.W.: 7.5kgs / 6.5kgs

MPPB600V1 | 111-1103
Portable Blower



Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 600W

No-load speed: 6000-16000/min

Volumetric flow rate: 3.5 m³/min

Features

- Dust extraction
- Strong filter
- Variable speed
- Easy to replace carbon brush
- Lock-on switch

Accessories Included

- Suction tube
- Dust bag
- Extra carbon brush×2

Packing Details

- Size: 44.5x25.5x42cm / 4pcs
- G.W. / N.W.: 8.2kgs / 7.2kgs

MPSG80/800V | 111-1400
Paint Sprayer



Features

- Quick release head
- Soft grip handle
- Larger bottle
- Adjustable flow rate

Specification

Voltage: 220-240V ~ 50/60Hz

Rated power input: 80W

Max.paint delivery: 280ml/min

Max.viscosity: 30DIN-s

Nozzle size: Ø0.8mm

Container capacity: 800ml

Packing Details

- Size: 51x27x52cm / 8pcs
- G.W. / N.W.: 13.25kgs / 12.25kgs

Accessories Included

- Viscosity cup
- Through hole needle
- Nozzle(Ø0.8mm)
- Nozzle wrench
- Valve×2



MPSG400/800V | 111-1401
Paint Sprayer



Features

- Quick release head
- Adjustable flow rate
- Larger capacity of bottle
- Adjustable nozzle
- Soft grip handle

Specification

Voltage: 220-240V ~ 50Hz

Rated power input: 400W

Max.paint delivery: 700ml/min

Max.viscosity: 60DIN-s

Nozzle size: Ø2.5mm

Container capacity: 800ml

Packing Details

- Size: 47.5x28x25.5cm / 4pcs
- G.W. / N.W.: 8kgs / 7kgs

Accessories Included

- Viscosity cup
- Nozzle cleaning pin



MPSG550/800V | 111-1402
Paint Sprayer



Features

- Quick release head
- Larger capacity of bottle
- Soft grip handle
- Adjustable flow rate
- Adjustable nozzle

MPPW800 | 111-1500
Plastic Pipe Welder



MPPW750/1500 | 111-1501
Plastic Pipe Welder



Specification

Voltage: 220-240V ~ 50Hz

Rated power input: 550W

Max.paint delivery: 700ml/min

Max.viscosity: 70DIN-s

Nozzle size: Ø2.5mm

Container capacity: 800ml

Packing Details

- Size: 47.5x28x25.5cm / 4pcs
- G.W. / N.W.: 8kgs / 7kgs

Accessories Included

- Viscosity cup
- Nozzle cleaning pin



Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 800W

Temperature adjustment: 50-300°C

Features

- Full aluminium heating plate
- 50°C and 300°C temperature-regulating
- Multiple mounting holes

Accessories Included

- Die head×6set(20/25/32/40/50/63mm)
- Spanner
- Base



Packing Details

- Size: 42.5x42.5x24cm / 4pcs
- G.W. / N.W.: 15.5kgs / 14.5kgs

Specification

Voltage: 220-240V~ 50/60Hz

Rated power input: 750/1500W

Temperature adjustment:50-300°C

Features

- Full aluminum heating plate
- 50°C and 300°C temperature-regulating
- Multiple mounting holes
- Dual- switch power control

Accessories Included

- Die head×6set(20/25/32/40/50/63mm)
- Scissors
- Tape: 3m
- Level ruler
- Gloves
- Screwdriver
- Spanner
- Screw×2



Packing Details

- Size: 46.5x32x30cm / 3pcs
- G.W. / N.W.: 17kgs / 16kgs

CUT-OFF SAW

Equipped with powerful motor and robust baseplate, Maxpro cut-off saw can challenge tough working tasks and worse job sites

MAXPRO[®]

**POWERFUL
AND ROBUST**

MPHG2000 | 111-1200

Heat gun



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 2000W
	Working temperature: I: 50°C II: 450°C III: 600°C
	Max airflow: 500L/min

Features	
	Ceramic & Mica heating element
	Three temperature settings
	Soft grip handle

Accessories Included	
	Fan nozzle
	Cone nozzle

Packing Details	
	Size: 59.5x40.5x29.5cm / 8pcs
	G.W. / N.W.: 11.5kgs / 10.5kgs

MPHG2000N | 111-1202

Heat gun



Specification	
	Voltage: 220-240V~ 50/60Hz
	Rated power input: 2000W
	Working temperature: I: 60°C II: 350°C III: 600°C
	Max airflow: 500L/min

Features	
	Ceramic & Mica heating element
	Three temperature settings
	Soft grip handle

Accessories Included	
	Fan nozzle
	Cone nozzle

Packing Details	
	Size: 51x45x28cm / 10pcs
	G.W. / N.W.: 10kgs / 9kgs

MPEM1250V | 111-2100

Electric Mixer



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1250W
	No-load speed: 0-580/min
	Mixing paddle: Φ120x570mm

Features	
	Soft grip handle
	Variable speed
	Easy to replace carbon brush

Accessories Included	
	Mixing paddle
	Wrench x 2pcs
	Extra carbon brush x 2

Packing Details	
	Size: 43x31x43cm / 2pcs
	G.W. / N.W.: 12.1kgs / 11.1kgs

MPBBG150 | 113-0000

Bench Grinder



Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 250W (S2 30min)
	No-load speed: 2950/min
	Wheel diameter: 150mm (#36,# 60)
	Arbor size: Ø12.7mm

Features	
	Induction motor
	Eye protector with integrated magnifier
	Aluminium tool rest
	4 non-slip feet

Accessories Included	
	Magnifier eye shield x 2
	Aluminium tool rest x 2

Packing Details	
	Size: 34x20,5x23cm / 1pc
	G.W. / N.W.: 7.5kgs / 6.5kgs



MPBBG200 | 113-0001

Bench Grinder



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 350W (S2 30min)
	No-load speed: 2950/min
	Wheel diameter: 200mm (#36,# 60)
	Arbor size: Ø16mm

Features	
	Induction motor
	Eye protector with integrated magnifier
	Aluminium tool rest
	4 non-slip feet

Accessories Included	
	Magnifier eye shield x 2
	Aluminium tool rest x 2








Packing Details	
	Size: 37,2x26,5x28,5cm / 1pc
	G.W. / N.W.: 10,5kgs / 9,5kgs



MPHPW1400/70 | 114-0012

High Pressure washer



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1400W
	Max. pressure: 105bar
	Rated pressurer: 70bar
	Rated flow: 5.5L/min
	Water outlet pressure hose: 5m
	Power cord with plug: 5m

Features

- Copper wire motor
- Water proof ON/OFF switch
- Wheel set for easy carry

Accessories Included

- Spray gun
- Soap bottle
- HPC connector
- 5m water pressure hose







Packing Details

- Size: 26.5x24.5x47.5cm / 1pc
- G.W. / N.W.: 6.5kgs / 5.5kgs

MPHPW1800/90 | 114-0005

High Pressure washer



Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1800W
	Max. pressure: 135bar
	Rated pressurer: 90bar
	Rated flow: 5.5L/min
	Water outlet pressure hose: 5m
	Power cord with plug: 5m

Features

- Copper wire motor
- Soap bottle for convenient clean
- Water proof ON/OFF switch
- Wheel set for easy carry

Accessories Included

- Spray gun
- Soap bottle
- HPC connector
- 5m water pressure hose

Packing Details

- Size: 37.5x33.5x82cm / 1pc
- G.W. / N.W.: 10.5kgs / 9.5kgs

MPEWM160 | 114-0100

Welding Machine



Features

- IGBT controllable switch
- Three PCB boards
- With digital display
- Adjusted current
- High protection level

MPEWM180 | 114-0101

Welding Machine



Features

- IGBT controllable switch
- Three PCB boards
- With digital display
- Adjusted current
- High protection level

MPEWM200 | 114-0102

Welding Machine



Features

- IGBT controllable switch
- Three PCB boards
- With digital display
- Adjusted current
- High protection level

Specification	
Rated supply voltage: 220-240V~ 50/60HZ	
Operating voltage: 90-260V	
Rated input capacity: 6.3KVA	
No-load voltage: 80V	
Welding current range: 20-160A	
Rated duty cycle: 25°C 50%	
Class of insulation: H	
Degrees of protection: IP21S	
Usable electrode: Ø1.6~Ø4mm	
Efficiency: 85%	

Packing Details

- Size: 40x24x29cm / 1pc
- G.W. / N.W.: 6.5kgs / 5.5kgs

Accessories Included

- Welding clamp
- Ground clamp
- Face shield
- Slag hammer



Specification	
Rated supply voltage: 220-240V~ 50/60HZ	
Operating voltage: 90-260V	
Rated input capacity: 7.1KVA	
No-load voltage: 80V	
Welding current range: 20-180A	
Rated duty cycle: 25°C 50%	
Class of insulation: H	
Degrees of protection: IP21S	
Usable electrode: Ø1.6~Ø5mm	
Efficiency: 85%	

Packing Details

- Size: 40x24x29cm / 1pc
- G.W. / N.W.: 6.5kgs / 5.5kgs

Accessories Included

- Welding clamp
- Ground clamp
- Face shield
- Slag hammer



Specification	
Rated supply voltage: 220-240V~ 50/60HZ	
Operating voltage: 90-260V	
Rated input capacity: 7.3KVA	
No-load voltage: 80V	
Welding current range: 20-200A	
Rated duty cycle: 25°C 50%	
Class of insulation: H	
Degrees of protection: IP21S	
Usable electrode: Ø1.6~Ø5mm	
Efficiency: 85%	

Packing Details

- Size: 40x25x29.5cm / 1pc
- G.W. / N.W.: 7kgs / 6kgs

Accessories Included

- Welding clamp
- Ground clamp
- Face shield
- Slag hammer



AIR COMPRESSORS

Maxpro has developed a series of air compressors to meet customers' demands, including oil type, oil free type and belt type. Their scientific designs and outstanding quality has gained commendable reputation for Maxpro tool family.









Air Compressors

MPEAC1500/24 | 114-0003
Air Compressor



CE

Specification

-  Voltage: 220-240V ~ 50Hz
-  Rated power input: 1500W/2HP
-  MAX. pressure: 115PSI,8Bar
-  No-load speed: 2800/min
-  Tank capacity: 24L
-  Air displacement: 206L/min

Features

- Double intake connectors
- Pressure gauge and quick-release coupling
- Automatic ON/OFF switch
- Oil level window
- European connection

Accessories Included

- Muffler
- Oil bottle
- Rubber foot
- Wheel×2
- Respirator

Packing Details







- Size: 65x28x64cm / 1pc
- G.W. / N.W.: 27.3kgs / 26.3kgs

MPEAC1500/50 | 114-0004
Air Compressor



CE

Specification

-  Voltage: 220-240V ~ 50Hz
-  Rated power input: 1500W/2HP
-  MAX. pressure: 115PSI,8Bar
-  No-load speed: 2800/min
-  Tank capacity: 50L
-  Air displacement: 206L/min

Features

- Double intake connectors
- Pressure gauge and quick-release coupling
- Automatic ON/OFF switch
- Oil level window
- European connection

Accessories Included

- Muffler
- Oil bottle
- Rubber foot ×2
- Wheel×2
- Respirator







Packing Details

- Size: 76x35x69cm / 1pc
- G.W. / N.W.: 34kgs / 32kgs

MPEAC1501/24 | 114-0006 Air Compressor



CE








Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 1500W/2HP
	MAX. pressure: 115PSI,8Bar
	No-load speed: 2800/min
	Tank capacity: 24L
	Air displacement: 206L/min

Features	
<ul style="list-style-type: none">• Double intake connectors• Pressure gauge and quick-release coupling• Automatic ON/OFF switch• Oil level window• Japanese connection	
Accessories Included	
<ul style="list-style-type: none">• Muffler• Oil bottle• Rubber foot• Wheel×2• Respirator	
Packing Details	
<ul style="list-style-type: none">• Size: 64.5x27.5x62.5cm / 1pc• G.W. / N.W.: 27.5kgs / 26.5kgs	

MPEAC1800/100 | 114-0010 Air Compressor



CE







Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 1800W /2.5HP
	Cylinder: Ø65mm×2
	Air delivery: 250L/min,8.9C.F.M
	MAX. pressure: 115PSI,8Bar
	No-load speed: 2800/min
	Tank capacity: 100L

Features	
<ul style="list-style-type: none">• Copper wire motor• Valve, with long life and low noise• Low oil consumption• Low internal pressure• Thicker and heavier designed connecting rod	
Accessories Included	
<ul style="list-style-type: none">• Muffler×2• Wheel×4	
Packing Details	
<ul style="list-style-type: none">• Size: 122x38x94cm / 1pc• G.W. / N.W.: 88.5kgs / 74kgs	

MPEAC1501/50 | 114-0007 Air Compressor



CE








Specification	
	Voltage: 220-240V ~ 50Hz
	Rated power input: 1500W/2HP
	MAX. pressure: 115PSI,8Bar
	No-load speed: 2800/min
	Tank capacity: 50L
	Air displacement: 206L/min

Features	
<ul style="list-style-type: none">• Double intake connectors• Pressure gauge and quick-release coupling• Automatic ON/OFF switch• Oil level window• Japanese connection	
Accessories Included	
<ul style="list-style-type: none">• Muffler• Oil bottle• Rubber foot ×2• Wheel×2• Respirator	
Packing Details	
<ul style="list-style-type: none">• Size: 76.5x34.5x71cm / 1pc• G.W. / N.W.: 34kgs / 33kgs	

MPEAC2200/200 | 114-0011 Air Compressor



CE

Specification	
	Voltage: 220-240V ~ 50/60Hz
	Rated power input: 2200W /3HP
	Cylinder: Ø65mm×2
	Air delivery: 250L/min,8.9C.F.M
	MAX. pressure: 115PSI,8Bar
	No-load speed: 1030/min
	Tank capacity: 200L

Features	
<ul style="list-style-type: none">• Copper wire motor• Valve, with long life and low noise• Low oil consumption• Low internal pressure• Thicker and heavier designed connecting rod	
Accessories Included	
<ul style="list-style-type: none">• Muffler×2• Wheel×4	
Packing Details	
<ul style="list-style-type: none">• Size: 133x52x96cm / 1pc• G.W. / N.W.: 126kgs / 100kgs	

