


# CD12M/DB-020C1

connectors





Micro Detectors

Italian Sensors Technology

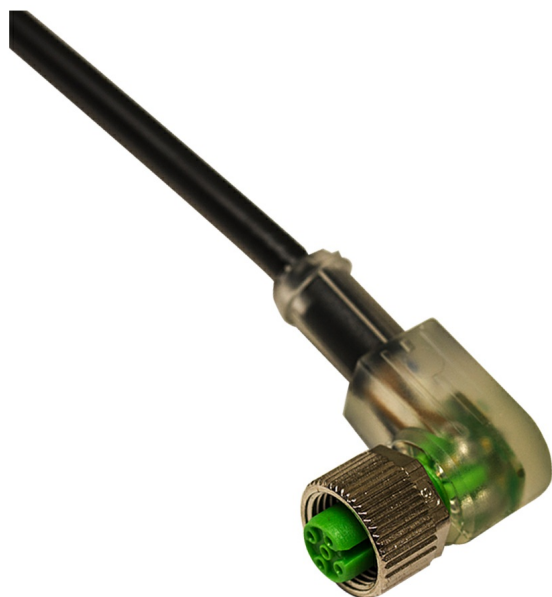

Indicative image

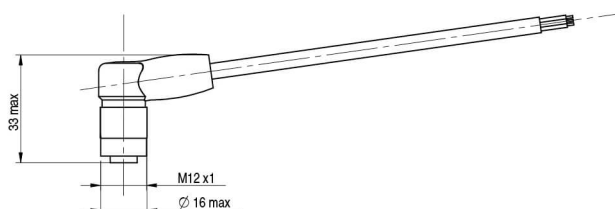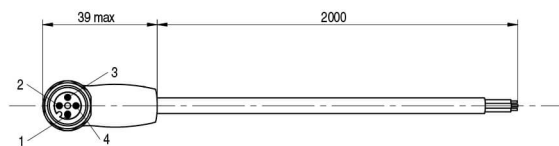

## Electrical data

Nominal current	4 A
Led	Bi-led
Wires	4 DECOUT ®
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

## Mechanical data

Tightening torque	0,6 Nm
Operating temperature	-10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Lenght (m)	2
Head type	90°
Plug	M12
Outer diameter	Ø 4.5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC

Conductors section

0,25 mm<sup>2</sup> (32 x 0,10 mm<sup>2</sup>)

Model

Femmina

## Test/Approvals


Degree of protection

IEC IP67

---

# ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---



---

**M.D. Micro Detectors S.p.A.**

Strada S. Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

**date of printing**

14/01/2021 14:47:34