

# CD12M/PA-100C1

connectors





Micro Detectors

Italian Sensors Technology



Indicative image

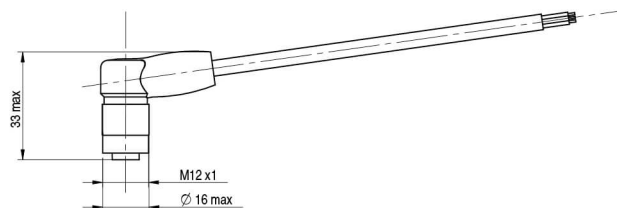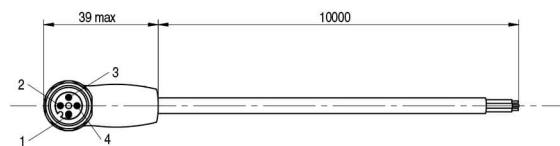

## Electrical data

Nominal current	4 A
Led	2 led
Wires	3 NO-PNP
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

## Mechanical data


Tightening torque	0,6 Nm
Operating temperature	=10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Lenght (m)	10
Head type	90°
Plug	M12
Outer diameter	Ø 4.5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC
Conductors section	0,25 mm <sup>2</sup> (32 x 0,10 mm <sup>2</sup> )
Model	Femmina

## Test/Approvals

---

# ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---



---

**M.D. Micro Detectors S.p.A.**

Strada S. Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

**date of printing**

22/01/2021 11:03:48