

CD12M/VB-100C1

connectors





Micro Detectors

Italian Sensors Technology



Indicative image

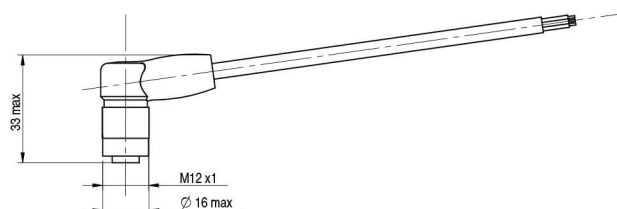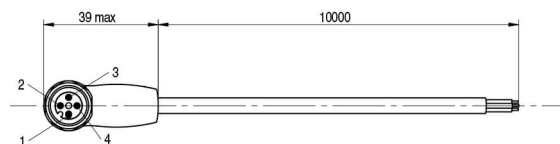

Electrical data


Nominal current	4 A
Led	2 led
Wires	4 NO/NC-PNP
Rated impulse voltage	2,5 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Tightening torque	0,6 Nm
Operating temperature	=10°C...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Lenght (m)	10
Head type	90°
Plug	M12
Outer diameter	Ø 4,5 mm ± 5%
Jacket material	PVC CEI 2022 II OR
Wire isolation	PVC
Conductors section	0,25 mm ² (32 x 0,10 mm ²)
Model	Femmina

Test/Approvals

ELECTRICAL DIAGRAMS OF THE CONNECTIONS



M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

22/01/2021 11:17:43