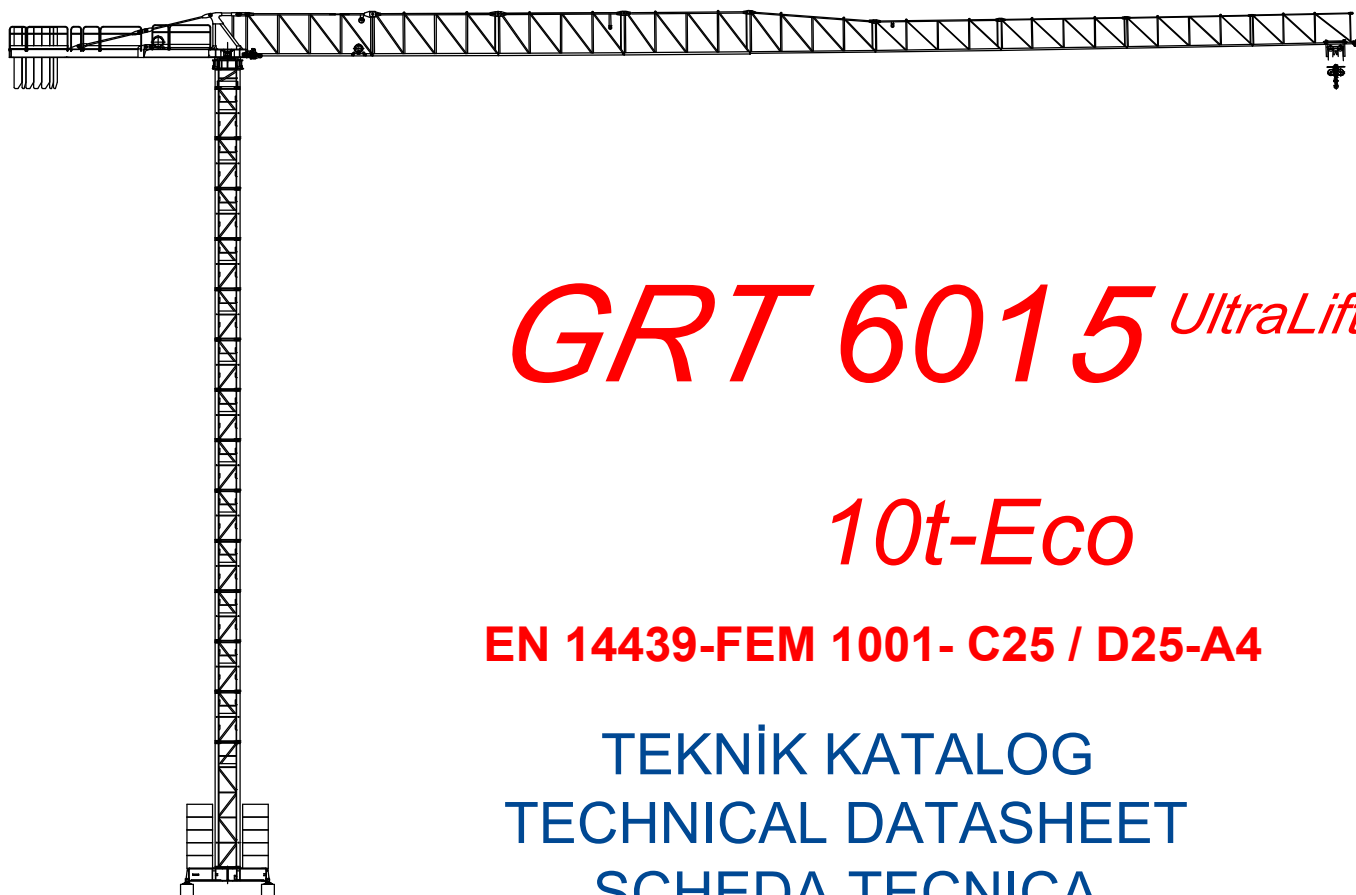





GRT 6015 *UltraLift*


10t-Eco

EN 14439-FEM 1001- C25 / D25-A4

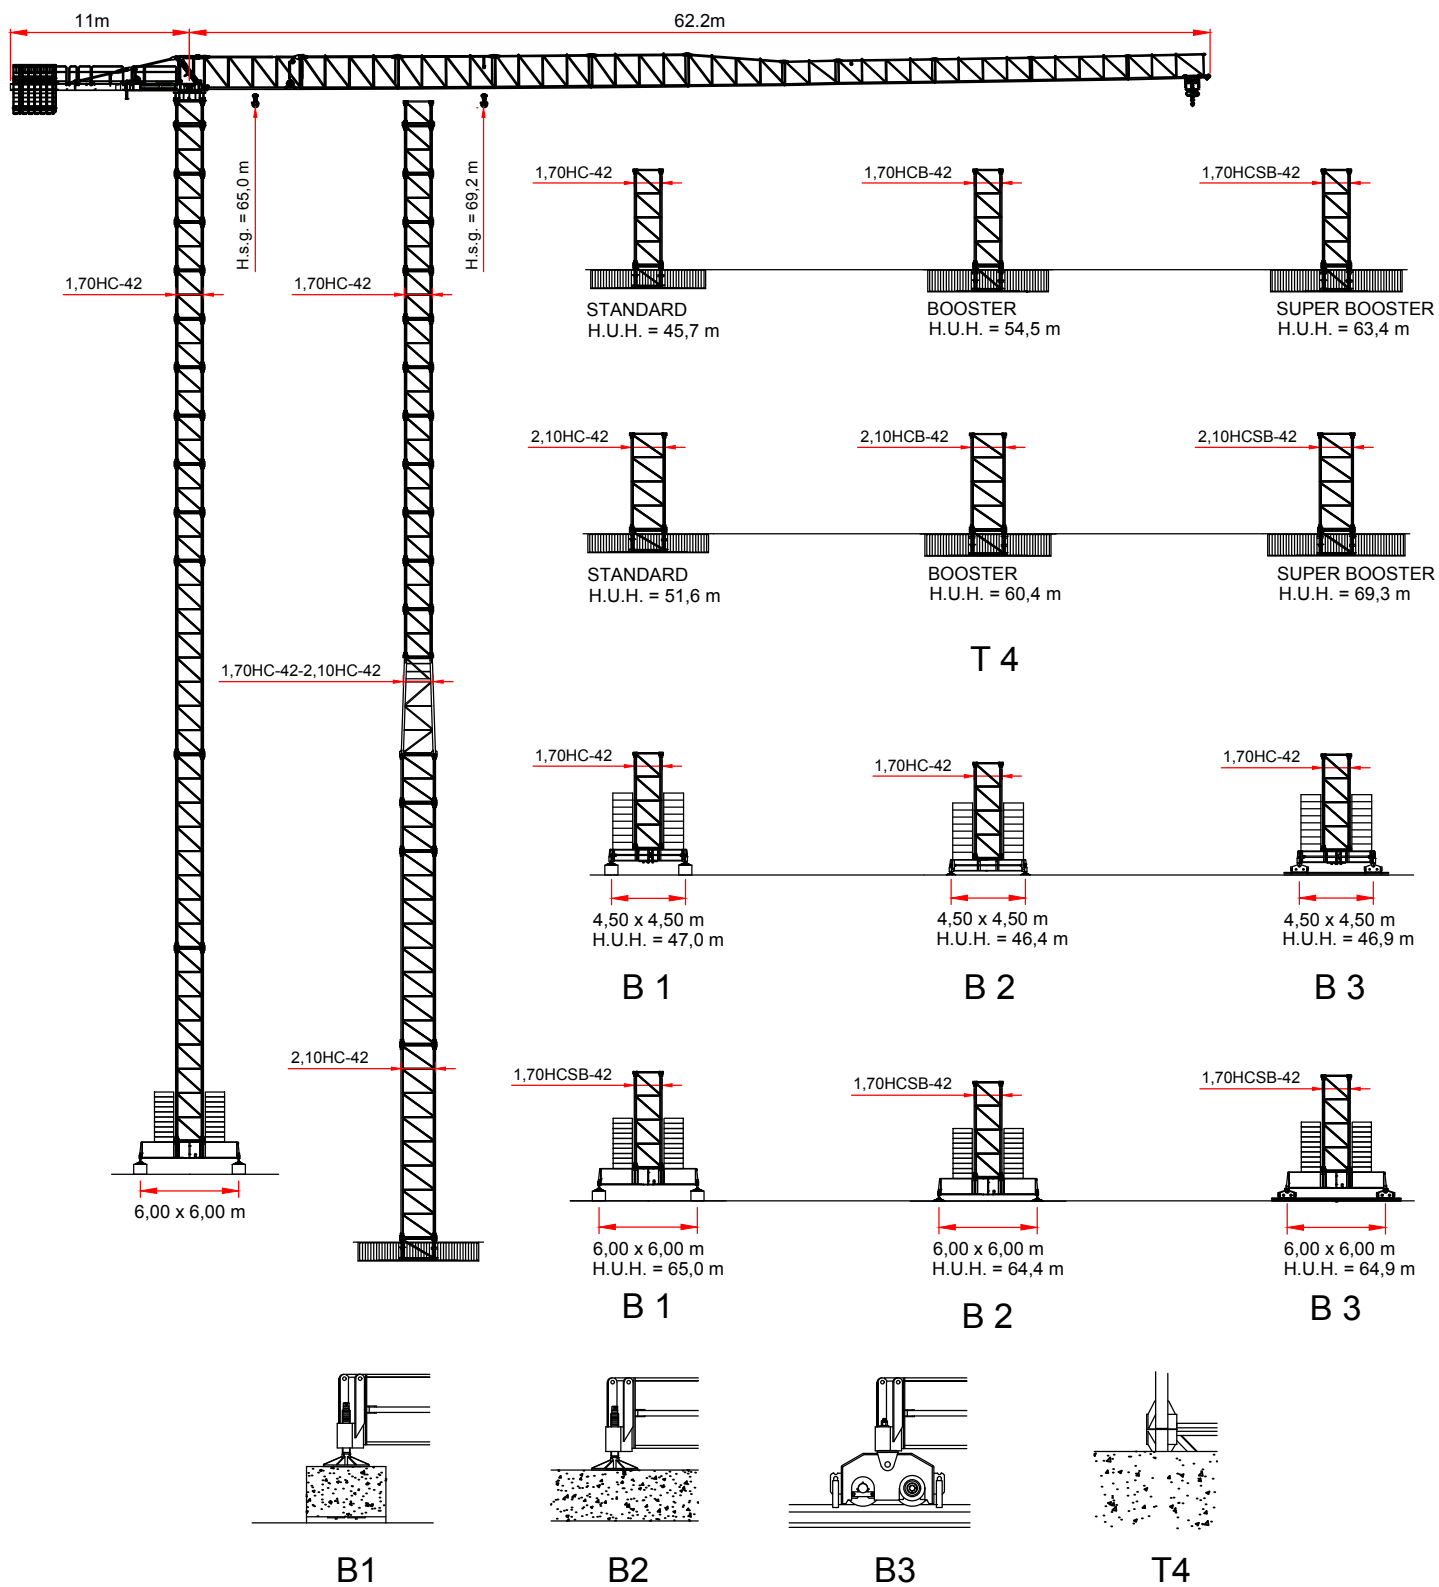
**TEKNIK KATALOG
TECHNICAL DATASHEET
SCHEDA TECNICA
FICHE TECHNIQUE
TECHNISCHE SPEZIFIKATIONEN**




YÜK DİYAGRAMI - DIAGRAMMI DI PORTATA - LOAD CHART - DIAGRAMME DE CHARGE UTILE - BELASTBERKEITSDIAGRAMM




	JIB (m)	26	28	32	35	38	44	50	56	60
5 t → 24.1m	t	4.3	4.0	3.4	3.1	2.8	2.3	1.9	1.7	1.5
10 t → 11.0m	t	4.4	4.0	3.4	3.0	2.7	2.2	1.8	1.6	1.4

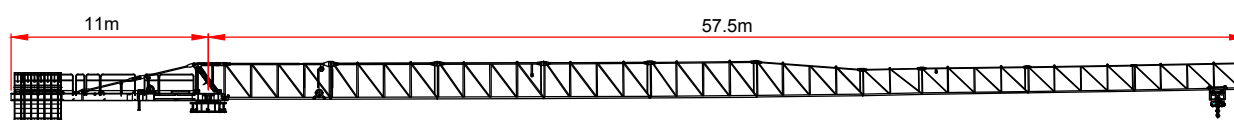


	JIB (m)	26	28	32	35	38	44	50	56
5 t → 25.9m	t	5.0	4.4	3.9	3.5	3.1	2.6	2.2	1.9
10 t → 12.0m	t	4.9	4.5	3.8	3.4	3.0	2.5	2.1	1.8

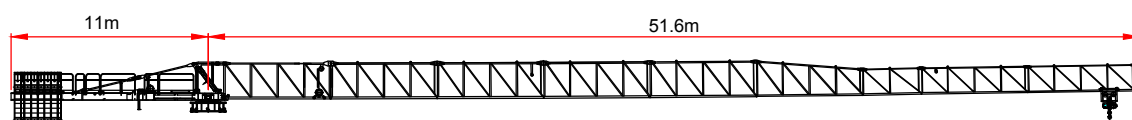


	JIB (m)	26	28	32	35	38	44	50
5 t → 28.0m	t	5.0	5.0	4.1	3.7	3.4	2.8	2.4
10 t → 13.1m	t	5.3	4.8	4.1	3.6	3.3	2.7	2.3



	JIB (m)	26	28	32	35	38	44
5 t → 28.0m	t	5.0	5.0	4.2	3.8	3.4	2.9
10 t → 13.1m	t	5.3	4.9	4.1	3.7	3.3	2.8



	JIB (m)	26	28	32	35	38
5 t → 28.2m	t	5.0	5.0	4.2	3.8	3.4
10 t → 13.1m	t	5.3	4.9	4.1	3.7	3.3




	JIB (m)	26	28	32	35
5 t → 28.2m	t	5.0	5.0	4.2	3.8
10 t → 13.1m	t	5.3	4.9	4.1	3.7

TEMELE ÖZELLİKLER - CARATTERISTICHE AZIONAMENTI PRINCIPALI - MAIN DRIVE FEATURES

CARACTÉRISTIQUE ACTIONNEMENTS PRINCIPAUX - HAUPTBEDIENUNGSEIGENSCHAFTEN















		Hız - Velocità - Speed - Vitesse - Geschwindigkeit	Güç - Potenza - Power - Puissance - Leistung
Dönüş Rotazione Slewing Orientation Schwenken		0 → 0,67 r.p.m.	2 x 65 Nm
Şaryo Carrello Trolley Chariot Katzfahren		12 / 35 / 70 m/min.	5,5 KW
Yürüyüş Traslazione Rail Translation Kranfahren		16 m/min.	2 x 4 kW

Tip Type Tipo Type Type		Güç - Power - Potenza Puissance - Leistung	Halat - Rope - Fune Cable - Seil
		hp - CV PS - ch	kW
			m
50-VF1035		50	37
Katman - Layer - Strati Couches - Lagen		N. 9	
Vites - Step - Marcia Vitesse - Gang		kg	m/min
1		5000	7,2
2		5000	36,2
3		2500	57,6
4		1500	79,2
Maksimum Yükseklik - Maximum height - Massima altezza - Hauteur maximale - Maximale Höhe		163 m	
			80 m


8 x 40' H.U.H =50mt	9 x 40' H.U.H =60mt		7 x H.U.H =50mt	8 x H.U.H =60mt	
Highcube					
L:13.60 W:2.45 H:3.00/2.70					

TOPLAM GÜÇ TOTAL INSTALLED POWER FORZA MOTRICE TOTALE PUISSANCE TOTALE DES MOTEURS GESAMT-MOTORENLEISTUNG	400 V - 50 Hz 58 kW
---	------------------------

Sevkiyat Listesi - Distinta di Carico - Packing List - Liste de Colisage - Kolli-Liste






No. Pos. Item	Parça Pezzi Pieces	Açıklama Denominazione Description	Çizim Schizzo Sketch	Boyutlar Dimensions			Ağırlık Weight (Kg)	
				L	W	H	Unit.	Total.
1	1	Bom Elemento di freccia Jib element Elément de flèche Ausleger	N° 0 	6.090	1.370	2.150	-	2020
	1		N°1 	6.130	1.150	2.060	-	960
	1		N°2 	6.155	1.150	2.060	-	916
	1		N°3 	6.155	1.150	2.060	-	790
	1		N°4 	6.155	1.150	2.060	-	566
	1		N°5 	6.060	1.150	2.030	-	512
	1		N°5b 	3.360	1.150	1.500	-	274
	1		N°6 	6.060	1.150	1.500	-	380
	1		N°7 	6.040	1.150	1.500	-	326
	1		N°8 	6.005	1.150	1.500	-	300
	1		N°9 	4.785	1.150	1.470	-	216
2	Bom Freccia Flèche Jib Ausleger		60 m	55.6	1.280	2.200	-	5240
			56 m	50.9	1.280	2.200	-	5024
			50 m	45.0	1.280	2.200	-	4724
			44 m	39.1	1.280	2.200	-	4398
			38 m	33.2	1.280	2.200	-	4018
			35 m	29.9	1.280	2.200	-	3744
3	1	Kule, Cuspide, A frame, Pointe, Turmspitze		1.65	1.21	1.73	-	695
4	1	Kuyruk tablası, kanca motoru elektrik panosu vs. Controfreccia girevole,organo di sollev. quadro elettrico etc. Counterjib-turntable, hoisting winch, electrical box etc. Contreflèche tournante,treuil de levage, armoire électrique. Gegenausleger, Hubwinde, Drehwerk Schaltschrank.		5.085	1.95	2.06	-	5905
3 + 4	1			5.085	1.7	2.65	-	6600
5	1	Kuyruk. Elemento controfreccia esterno. External counterjib. Contreflèche extérieure. Externes gegenausleger.		7.215	1.435	1.470	-	2050
6		Kabin Cabina e ballatoio Cabin with access platform Cabine avec ensemble mat cabine Kabine		2.600	2.100	2.100	650	836
7	-	Mast Elemento di torre Tower element Elément de Mât Turmstück	Standard 	11.8	1.87	1.87	*	4172
			Booster 	11.8	1.87	1.87	*	5430
			Super Booster 	11.8	1.87	1.87	*	6345
8	-			5.9	1.87	1.87	*	2250
9	-			2.95	1.87	1.87	*	1365

Sevkiyat Listesi - Distinta di Carico - Packing List - Liste de Colisage - Kolli-Liste

No. Pos. Item	Parça Pezzi Pieces	Açıklama Denominazione Description	Çizim Schizzo Sketch	Boyutlar Dimensions			Ağırlık Weight (Kg)		
				L	W	H	Unit.	Total.	
10	-	Ankraj Tronchetto di fondazione Expendable foundation element Elément a sceller Fundamentanker		1.325	1.94	1.94	*	750	
10	-		Standard 	1.525	1.94	1.94	*	750	
10	-		Booster 	1.525	1.94	1.94	*	750	
11	-	Canşın Mast Telaio di spinta Jacking element Hubelement	Super Booster 	1.540	1,95	1.95	*	980	
12	1	ŞASE - UZUN KOL TRAVE DI BASE PRINCIPALE BASE MAIN BEAM POUTRE DE CHASSIS DE BASE		4,5x4,5mt	6,530	0,710	0,760	*	2120
13	1	ŞASE - KISA KOL SEMI-TRAVE DI BASE HALF BASE BEAM SEMIPOUTRE DE CHASSIS DE BASE		4,5x4,5mt	3,200	0,590	0,770	1030	2060
14	2	YÜRÜYÜŞ TAKIMI BILANCINO DI TRASLAZ. FOLLE DRIVEN BOIGE BOGGIE FOU			1.16	0.25	0.503	455	960
15	2	YÜRÜYÜŞ TAKIMI - MOTORLU BILANCINO DI TRASLAZ. MOTORIZ. BOGGIE MOTORISEE DRIVING BOIGE			1.16	0.59	0.503	680	1360
12	1	ŞASE - UZUN KOL TRAVE DI BASE PRINCIPALE BASE MAIN BEAM POUTRE DE CHASSIS DE BASE		6,0x6,0mt	8,640	0,780	1,07	*	4750
13	1	ŞASE - KISA KOL SEMI-TRAVE DI BASE HALF BASE BEAM SEMIPOUTRE DE CHASSIS DE BASE		6,0x6,0mt	4,320	0,680	1,07	2370	4740
14	2	YÜRÜYÜŞ TAKIMI BILANCINO DI TRASLAZ. FOLLE DRIVEN BOIGE BOGGIE FOU			1320	0,220	0,540	0,600	1200
15	2	YÜRÜYÜŞ TAKIMI - MOTORLU BILANCINO DI TRASLAZ. MOTORIZ. BOGGIE MOTORISEE DRIVING BOIGE			1430	0,490	0,540	0,760	1520
16	34	Şase taşı Blocco di zavorra Base ballast block Lest de base Grundballastblöcken	(Z 295) 		3.600	0.300	1.200	2950	100300
17	4	Destek bloğu Blocco di appoggio Concrete pad Sabot en béton Betonfuss	(BA 2) 		3,600	0,800	0,600	3925	15700
18	2	Kuyruk taşı Blocchi di contrappeso Counterweight block Contre-poids Gegengewichtsbloেকে		A 125	3.000	0.185	1.200	1250	2500
	B 250			3.000	0.370	1.200	2500	15000	

1,70HC-42

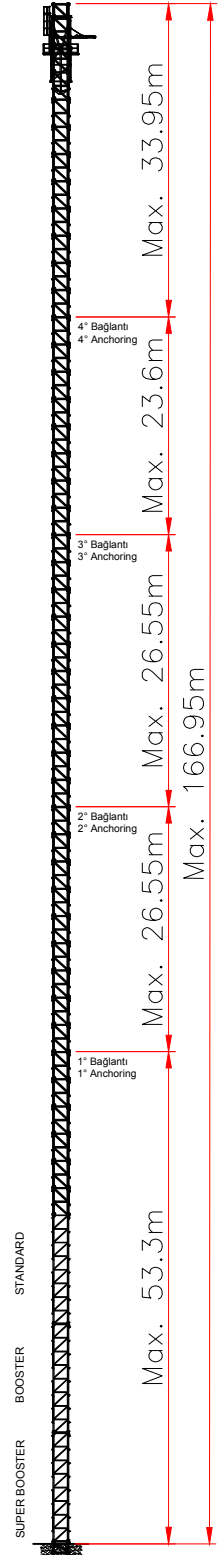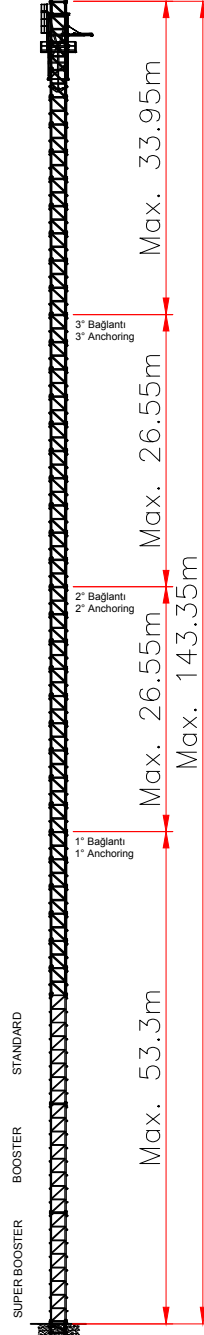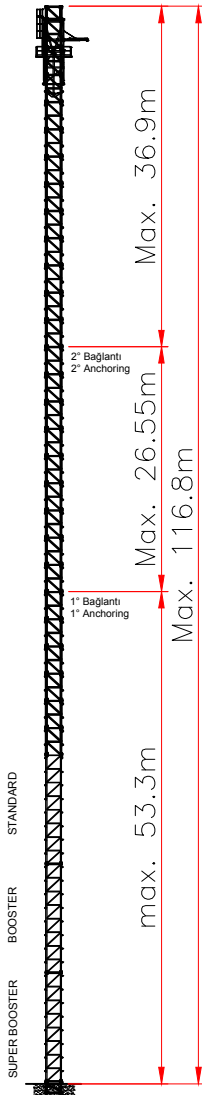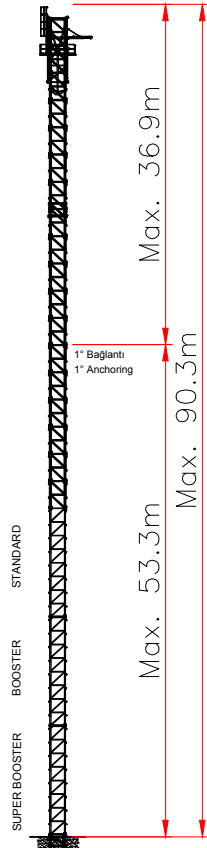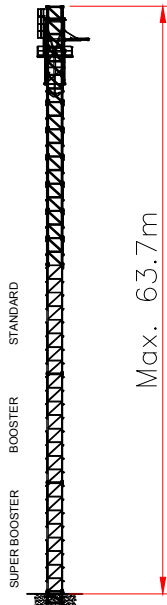YÜKSELTİLEBİLİR
A SOPRALZO IDRAULICO
EXTERNAL CLIMBING
TELESCOPABLE
KLETTERKRANE



Farklı Dizilimler Mümkündür
Altre Configurazioni Disponibili
Other Configuration Available
Autres configurations Disponibles
Andere Konfigurationen Verfügbar

MERKEZ/CENTER:

Merkez Mahallesi Zafer Caddesi B Blok No:12/2/1 GÜMÜŞOVA
(Gümüşova OSB) DÜZCE

İletişim / Contact

Tel : +90 850 302 08 46
Fax : +90 380 553 74 15
E-mail : info@tgmkulevinc.com.tr



Özellikler ve teknik veriler katalogdakinden farklılık gösterebilir.

Dati illustrativi non impegnativi con riserva di modifica senza preavviso

Specifications and data not binding subject to modification without notice

Angaben und Beschreib ungunverbindlich andreungen vorbehalten ohne weitere mitteilung

Données techniques seulement indicatives modifications réservées sans préavis.