

MV6/CO-0A

cylindrical photosensors




Micro Detectors

Italian Sensors Technology



Indicative image

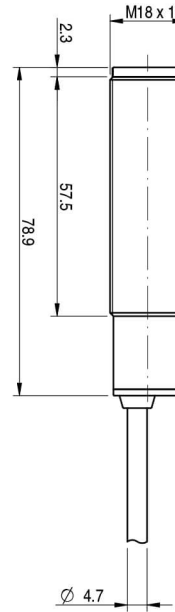

Detection properties

Nominal sensing distance	400mm
Thermal drift of Sr	$\leq 10\%Sr$
Repeat Accuracy	5%
Sensitivity adjustment	No

Application

Function Principle	Diffuse reflection (medium distance, $\leq 600mm$)
Notes	With 200x200mm white matt paper
Optic position	Axial

Outputs

Output type	TRIAC
Output Function	NC

Switching frequency 25Hz

Electrical data

Operating Voltage	20...253Vac/50...60Hz
No-Load supply current	≤30mARMS
Load current	5...300mARMS
Leakage current	6A
Output voltage drop	≤3V IL=300mA
Max ripple content	≤ 10%
LED indicators	Red
Time delay before availability	200ms
Emission	Infrared (880nm)
Interference to external light	3.000lux (incandescent lamp), 10.000lux (sunlight)

Mechanical data

Dimensions	M18x1/L=78,9mm
Weight	100g
Housing Material	PBT / PC cable exit
Connections	2m PVC cable
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (without freeze)
Diameter/Dimension	M18


Test/Approvals

Approvals	CE, cRUus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories


Supplied Accessories Metallic nut (2x)

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

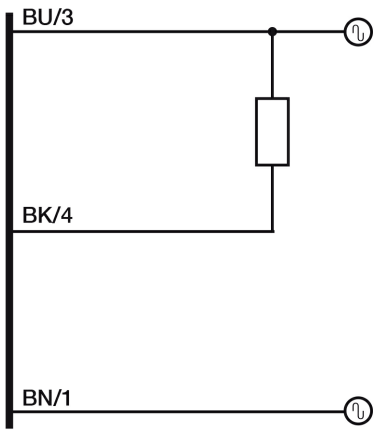


RESPONSE CURVES


Dimensione Spot

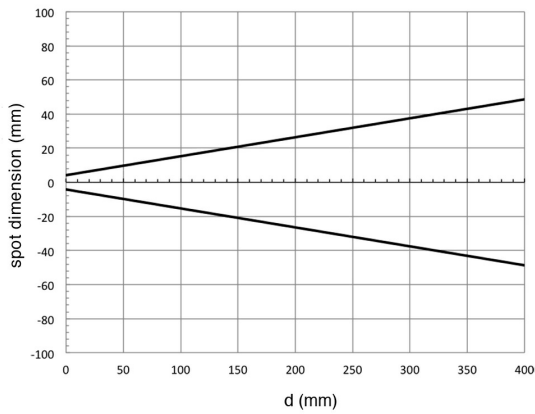

Disassamento Parallelo

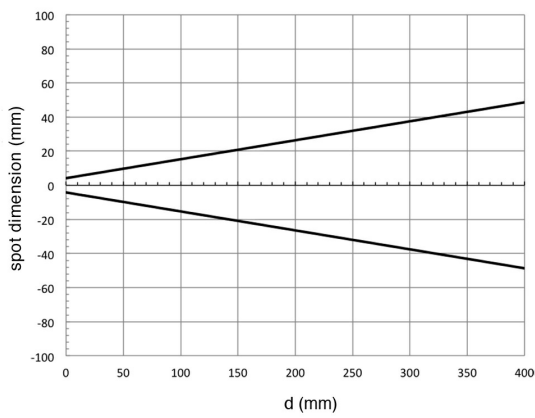

Eccesso di Guadagno

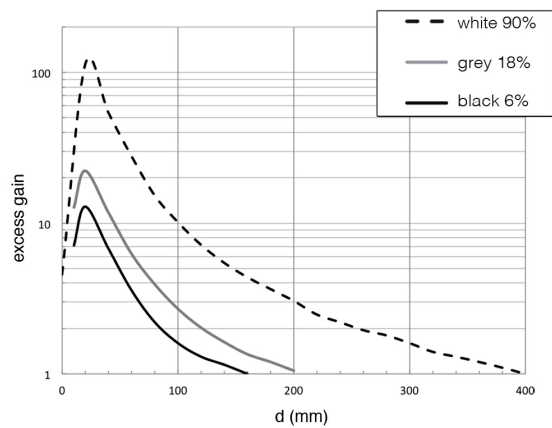

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

10/03/2021 08:56:25