

MOTOR RUN CAPACITOR

Application



This capacitor is widely used as start-up and running capacitor that is special for electric appliances such as electric fan ,ventilators and exhaust fan.



JY-MOTOR RUN CAPACITOR

FOR FAN

Products Overall Dimension

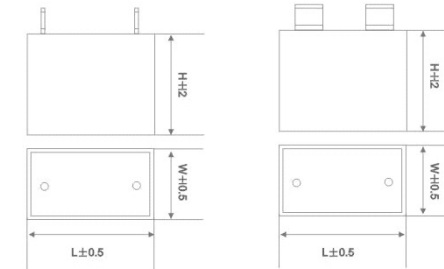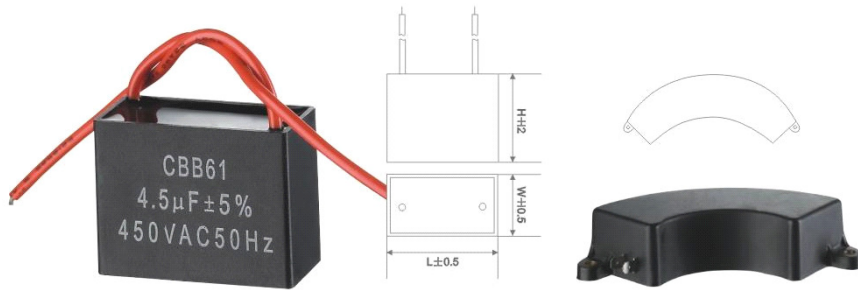

产品特点:

- 该电容器采用锌边缘加厚聚丙烯薄膜或网状安全膜为介质，阻燃环氧树脂灌封和阻燃方型ABS塑壳封装具有体积小，电气性能稳定，安全可靠，寿命较长等特点。

Product character:

- This capacitor use polypropylene film or reticulation safety film (coated by Zinc and Aluminum) as a dielectric, encapsulated by retardant epoxy resin and square ABS plastic. It's small size, reliable and safe, also has stable electric and long working life.

用途:

- 广泛用于电风扇、发电机、鼓风机的启动和运转。

Application:

- This capacitor is widely used as start-up and running capacitor that is special for electric appliances such as electric fan, ventilators and exhaust fan.

技术参数 Technical Data

执行标准 Performance standard	GB/T3667.1-2005/ IEC60252-1:2001
气候类别 Climate types	25/70/21
容量偏差 Capacitance tolerance	±5%
绝缘电阻 Insulation resistance	≥3000MΩ. μF
损耗角正切 Loss Tangent	Tg δ ≤0.002 (50Hz-100Hz)
耐电压T-T Endurable voltage (T-T)	施加2倍的工作电压2秒钟无击穿 2times working voltage, no breakdown within 2 seconds

Dimensions(mm)

Capatitance (μ F)	250V	450V
	LXWXH (mm)	
0.5	39×16×25	39×16×25
1		
1.2		
1.5		
2		
2.2		
2.5	38×20×30	38×20×30
3		
3.5		
4		
5	38×20×30	47×22×32
6		
8	46×18×33	58×28×43
10		
12	47×22×32	58×35×49
15		
20	58×28×43	60×33×53
25		
30	58×35×49	
35		
40	60×33×53	

备注: 可根据客户要求的规格生产
Remarks: The specifications can be according to clients requests