

CF/CB1-10

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

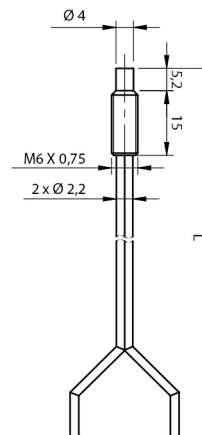

Detection properties

Distance with SSF	50 mm
Distance with FS1	50 mm
Distance with FX3	200 mm
Distance with FX4	300 mm
Distance with F1R	150 mm

Application

Function Principle	Diffuse reflection
Description	Plastic optical fibres
Optic position	Axial

Mechanical data

Operating temperature	-40°C....+70°C (posa fissa)
1	1
1 mm	0,5 mm
M4 con sleeve	M6
vetro, ETM, inox	PE, plastic
ottone nichelato	nickel-plated brass

Test/Approvals

Degree of protection

IP67

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

11/06/2021 16:00:33