

CR0/0B-1V

polarized retroreflective




Micro Detectors

Italian Sensors Technology



Indicative image

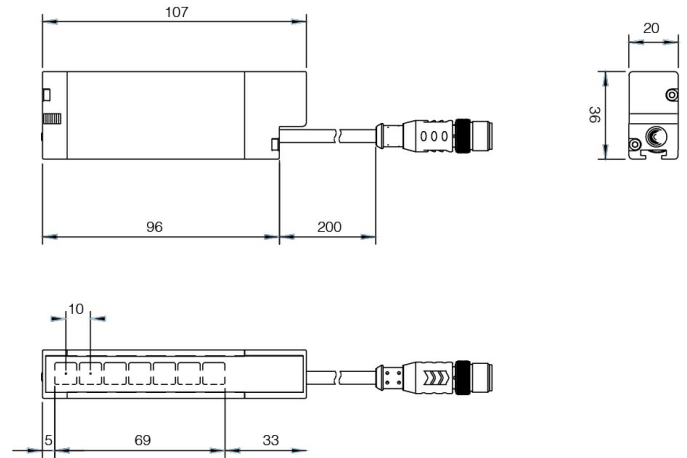

Detection properties

Nominal sensing distance	0,2 ... 4,5m (with RL106G)
Thermal drift of Sr	≤10%
Beams space	10mm
controlled height	69mm
minimum detectable object	Ø 3...6mm @ 2m RL106G - Ø 3...10mm @ 4,5m RL106G
number of rays	6
Sensitivity adjustment	Teach in: fine < 3s; standard > 6s

Application

Function Principle: Retroreflective polarized area sensor

Outputs

Output type: NPN + PNP

Output Function	NO/NC
Switching frequency	400Hz

Electrical data

Operating Voltage	12 - 30Vdc
No-Load supply current	100mA
Load current	100mA
Leakage current	≤100μA
Output voltage drop	3Vdc @ 100mA
Max ripple content	≤ 10%
LED indicators	green: power supply-alignment; red: dark/light status
Time delay before availability	300ms
Short-circuit protection	Yes (autoreset)
Reverse Polarity Protection	Yes
Emission	Red
Interference to external light	5000lux (fluorescent lamp); 50000lux (sun light)
Impulsive Overvoltage Protection	Yes

Mechanical data

Dimensions	107mm x 20mm x 36mm
Weight	100g
Housing Material	Aluminim
Connections	M12 pigtail
Active Head Material	PMMA
Operating temperature	-10°C...+ 55° C (without freeze)


Test/Approvals

Approvals	CE, cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	IEC EN 60947-5-2 / 7.4
Degree of protection	IP67

Accessories


Supplied Accessories	RL106G reflector + fixing kit (ST151)
----------------------	---------------------------------------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

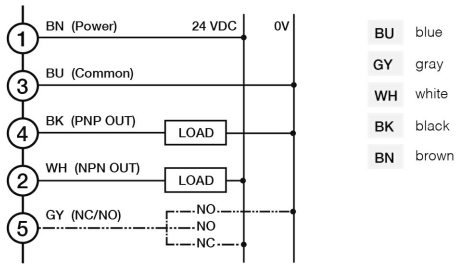

BU	blue
GY	gray
WH	white
BK	black
BN	brown

CONNECTOR

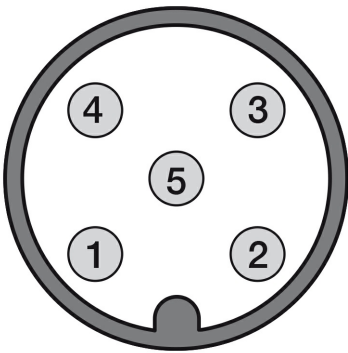

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

11/06/2021 20:49:51