










ERGO CUT A 81



CE EN60974-7



CODE	↔		🔌
PAA106M-000-BA3	6 m	19.7'	 1/4 GAS
PAA106M-071-BA3	6 m	19.7'	 3/8 GAS
PAA106M-004-BA3	6 m	19.7'	 CENTRAL 004
PAA106M-304-BA3	6 m	19.7'	 TRAFIMECTOR® 304

TECHNICAL DATA		
 HF	ERGO CUT A 81	
 1m	0,6 kg	1.32 lb
 PEAK	500	
	5 bar	
	155 l/min	
 60%	80A	
 100%	60A	
	20-25 mm	25/32"-1"

For Central 004 and Trafimector 304 pin connection scheme see page 114

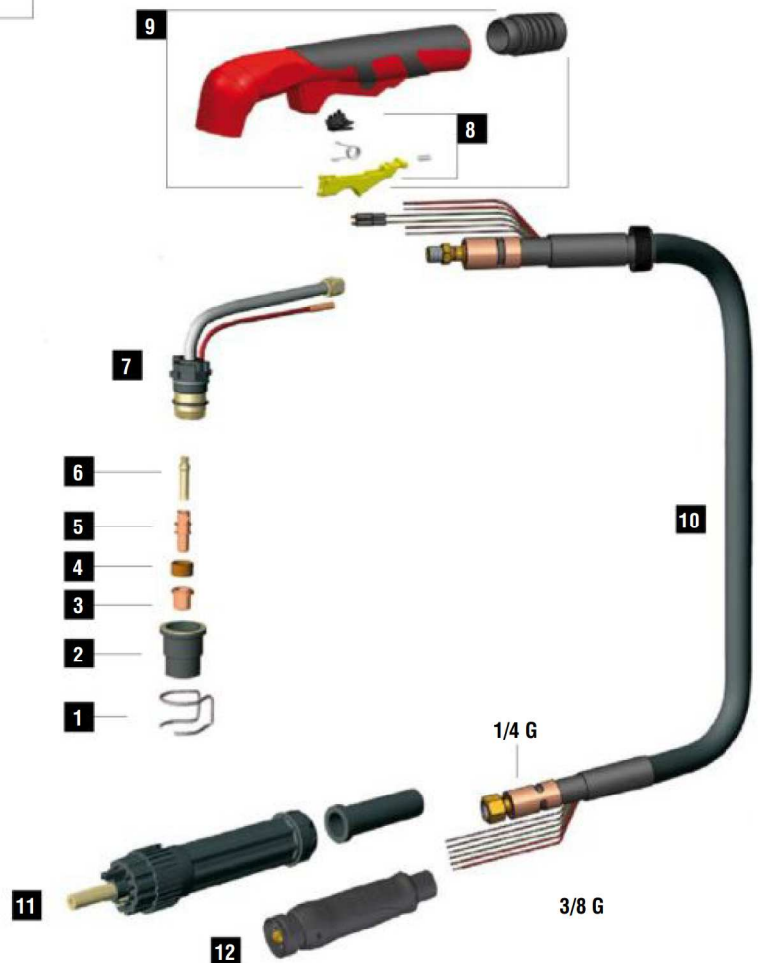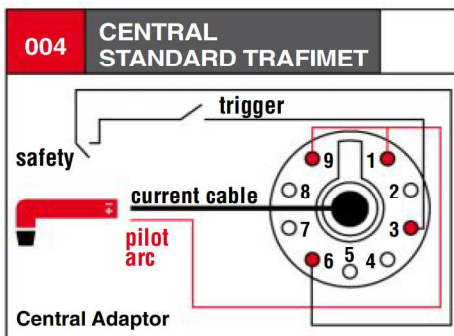

	CODE		DESCRIPTION	Ø			CONTACT		DRAG		GOUGING	REF	
1	CV0026		stand off guide			25,5 mm							2
1	CV0028		stand off guide			20,5 mm							10
1	CV0033		stand off guide			26 mm							2
1	CV0051		stand off guide	24,3 mm		31 mm							1
1	CV0201		ceramic stand off guide			30 mm							1
2	PC0115		nozzle			35,4 mm							2
3	PD0105-10		50 A	1,0 mm	.040"	13,3 mm						-	10
3	PD0105-12		80 A	1,2 mm	.047"	13,3 mm						-	10
3	PD0106-12		80 A	1,2 mm	.047"	25,8 mm						-	10
4	PE0107		diffuser			8,2 mm						-	2
5	PR0109		electrode			27 mm							10
5	PR0115		electrode			39,5 mm							10
6	FH0560		air tube			28 mm							1
6	FH0561		long air tube			40 mm							1

	CODE		DESCRIPTION	
7	EA0125		O-ring Ø 15,6 x 1,78 mm	10
7	PF0140		Ergocut A 81 torch head	1
8	TP0400		trigger kit	1
9	TP0402		handle kit	1
10	PH4003		coaxial cable - 6 m / 19.7' - 1/4 G (no pin)	1
10	PH4009		coaxial cable - 6 m / 19.7' - 3/8 G (no pin)	1

	CODE		DESCRIPTION	
11	BW0147		cable support	10
11	FY0023		plasma central adaptor - 5 pins	1
12	FY0090		TRAFIMEKTOR® central adaptor - torch side	1
	EA0254		pin extractor for central adaptor	1
	PT0202		male spring pins kit (5 pcs)	1

STANDARD

CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING