

CF/CC1-20

optical fibers




Micro Detectors

Italian Sensors Technology



Indicative image

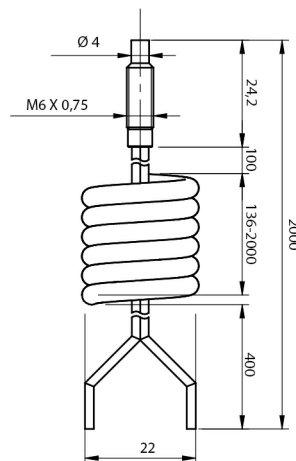

Detection properties

Distance with SSF	15 mm
Distance with FS1	15 mm
Distance with FX3	70 mm
Distance with FX4	100 mm
Distance with F1R	50 mm

Application

Function Principle	Diffuse reflection
Description	Plastic optical fibres
Optic position	Axial

Mechanical data

Operating temperature	-40°C....+70°C (posa fissa)
1	2
1 mm	1 mm spiralata
M4 con sleeve	M6
vetro, ETM, inox	PE, plastic
ottone nichelato	nickel-plated brass

Test/Approvals

Degree of protection

IP67

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

29/08/2021 15:33:36