

MVC/A0-0A

cylindrical photosensors




Micro Detectors

Italian Sensors Technology



Indicative image

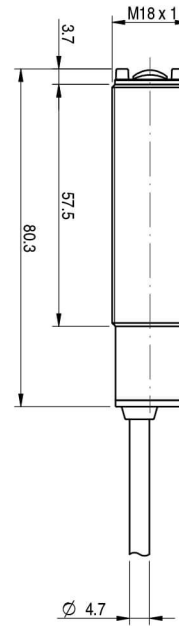

Detection properties

Nominal sensing distance	4.500mm
Thermal drift of Sr	≤10%Sr
Repeat Accuracy	5%
Sensitivity adjustment	No

Application

Function Principle	Retro-reflective
Notes	With standard reflector ϕ 80mm (RL110 supplied separately)
Optic position	Axial

Outputs

Output type	TRIAC
Output Function	NO
Switching frequency	25Hz

Electrical data

Operating Voltage	20...253Vac/50...60Hz
No-Load supply current	≤30mARMS
Load current	5...300mARMS

Leakage current	6A
Output voltage drop	≤3V IL=300mA
Max ripple content	≤ 10%
LED indicators	Red
Time delay before availability	200ms
Emission	Infrared (880nm)
Interference to external light	3.000lux (incandescent lamp), 10.000lux (sunlight)

Mechanical data

Dimensions	M18x1/L=78,9mm
Weight	100g
Housing Material	PBT / PC cable exit
Connections	2m PVC cable
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (without freeze)
Diameter/Dimension	M18


Test/Approvals

Approvals	CE, cRUus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories


Supplied Accessories	Metallic nut (2x)
----------------------	-------------------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

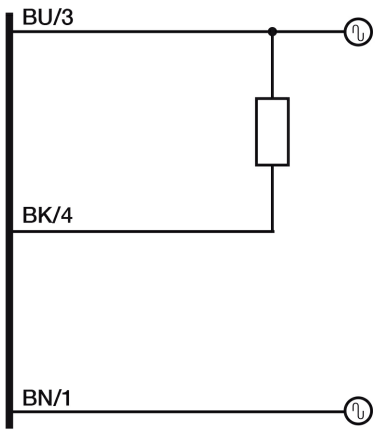


RESPONSE CURVES


Dimensione Spot

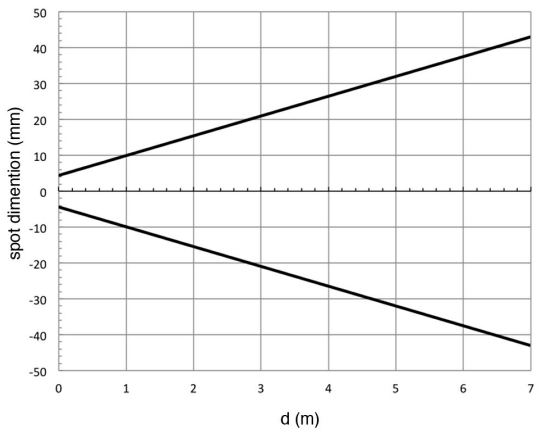

Disassamento Parallelo

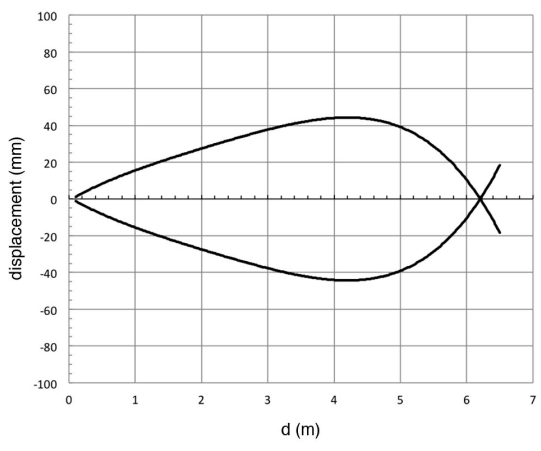

Eccesso di Guadagno

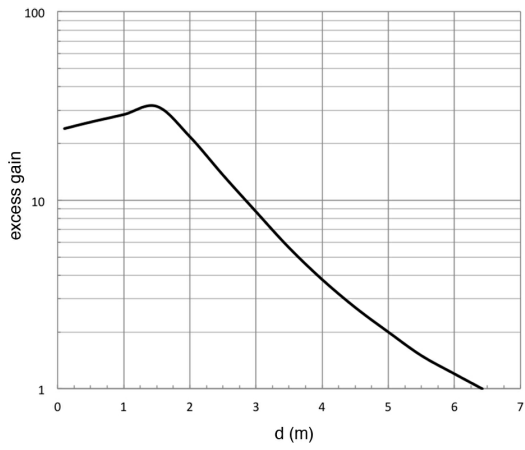

M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@microdetectors.com

date of printing

01/09/2021 11:00:07