



GENERAL FEATURES

The LTM Series, which is easy to use and install, is the most used model of the industry. It is used to measure linear movements with one-sided actuating rod.

They work as ABSOLUTE because they are measuring with the potentiometric principle, that is, they do not lose their position in case of power off. Potentiometric, 4-20 mA (optional 0-20 mA) or 0-10V analog output options are available.




Because of their linearized conductive plastic resistance alloy and special contacts, they are not affected by wear and operate for a long time with a life cycle of up to 100 million. They are stable by being linear and they measure evenly.

- One-sided Actuating Rod
- Measurement lengths between 50 mm and 1000 mm
- Potentiometric measurement
- Potentiometric, 4-20 mA or 0-10V analog output options
- Long life up to 100 million movements
- High accuracy
- Compact design
- 5 m/s operating speed
- PVC cable or DIN43650-A socket connection
- IP62 protection class

TECHNICAL SPECIFICATIONS




Model	LTM 50	LTM 75	LTM 100	LTM 125	LTM 150	LTM 175	LTM 200	LTM 225	LTM 250	LTM 275	LTM 300	LTM 325	LTM 350	LTM 360	LTM 375	LTM 400	LTM 450	LTM 500	LTM 550	LTM 600	LTM 650	LTM 700	LTM 750	LTM 800	LTM 900	LTM 1000	
Electrical Stroke (mm)	50	75	100	125	150	175	200	225	250	275	300	325	350	360	375	400	450	500	550	600	650	700	750	800	900	1000	
Independent Linearity (±%)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	
Repeatability	0.01 mm																										
Max Operating Speed	≤ 5 m/s																										
Resistance Element	Conductive Plastic																										
Output Signal	Potentiometric						4-20 mA (opt. 0...20 mA) or 0-10V																				
Supply Voltage	42V max.						12...30 VDC																				
Resistance (KΩ)	5, 10 (Optional others)						-																				
Resistance Tolerance (±%)	20						-																				
Electrical Connection	3 x 0,14 mm ² shielded PVC cable or DIN43650-A socket																										
Mechanical Fixing	Adjustable (sliding) mounting feet																										
Operating Temperature	-30°C...+100°C																										
IP Protection Class	IP62																										
Life	100 x 10 ⁶ movements																										
Material	Body: Aluminium Rod: Stainless Steel																										

MECHANICAL DIMENSIONS (model with cable) (mm)

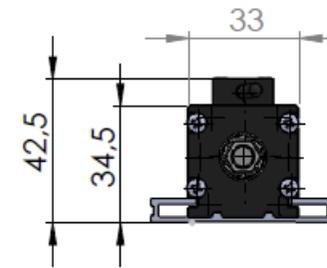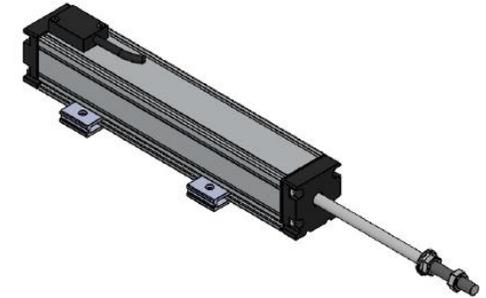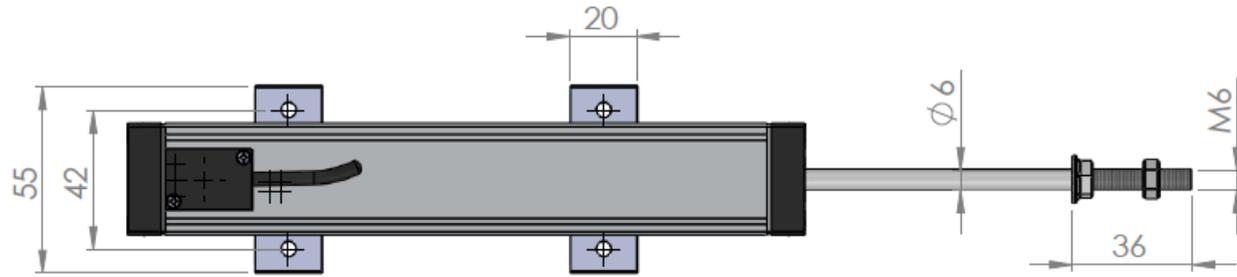

	Stroke (mm)	50	75	100	125	150	175	200	225	250	275	300	325	350	360	375	400	450	500	550	600	650	700	750	800	900	1000
Potentiometric Output	Mechanical Stroke (A)	52	77	102	127	152	177	202	227	252	277	302	327	352	362	377	402	452	502	552	602	652	702	752	802	902	1002
	Body Length (B)	127	152	177	202	227	252	277	302	327	352	377	402	427	437	452	477	527	577	627	677	727	777	827	877	977	1097
0-10 V Output	Mechanical Stroke (A)	52	77	102	127	152	177	202	227	252	277	302	327	352	362	377	402	452	502	552	602	652	702	752	802	902	1002
	Body Length (B)	127	152	177	202	227	252	277	302	327	352	377	402	427	437	452	477	527	577	627	677	727	777	827	877	977	1097
4-20 mA Output	Mechanical Stroke (A)	52	77	102	127	152	177	202	227	252	277	302	327	352	362	377	402	452	502	552	602	652	702	752	802	902	1002
	Body Length (B)	134	159	184	209	234	259	284	309	334	359	384	409	434	444	459	484	534	584	634	684	734	784	834	884	984	1104

MECHANICAL DIMENSIONS (model with socket) (mm)

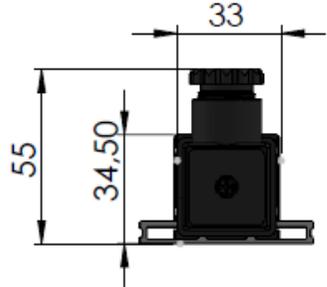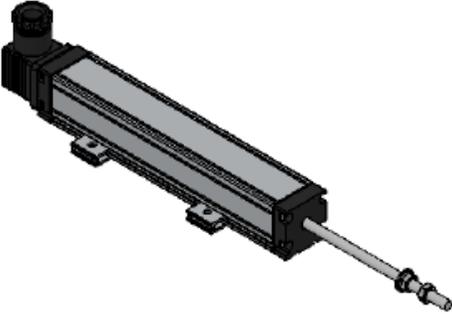
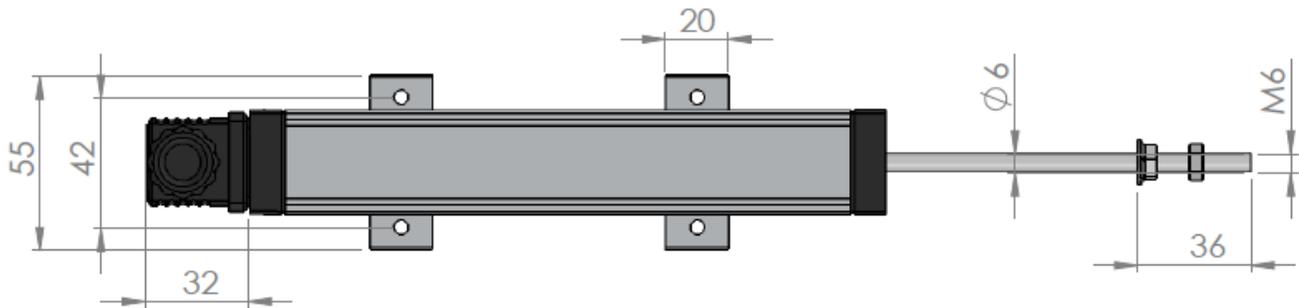


	Stroke (mm)	50	75	100	125	150	175	200	225	250	275	300	325	350	360	375	400	450	500	550	600	650	700	750	800	900	1000
Potentiometric Output	Mechanical Stroke (A)	52	77	102	127	152	177	202	227	252	277	302	327	352	362	377	402	452	502	552	602	652	702	752	802	902	1002
	Body Length (B)	125	150	175	200	225	250	275	300	325	350	375	400	425	435	450	475	525	575	625	675	725	775	825	875	975	1095
0-10 V Output	Mechanical Stroke (A)	52	77	102	127	152	177	202	227	252	277	302	327	352	362	377	402	452	502	552	602	652	702	752	802	902	1002
	Body Length (B)	125	150	175	200	225	250	275	300	325	350	375	400	425	435	450	475	525	575	625	675	725	775	825	875	975	1095
4-20 mA Output	Mechanical Stroke (A)	52	77	102	127	152	177	202	227	252	277	302	327	352	362	377	402	452	502	552	602	652	702	752	802	902	1002
	Body Length (B)	132	157	182	207	232	257	282	307	332	357	382	407	432	442	457	482	532	582	632	682	732	782	832	882	982	1102

ELECTRICAL CONNECTIONS


SIGNAL	CABLE COLOR	DIN 43650 –A SOCKET
+ V	Red	Pin 1
Output Signal*	Yellow	Pin 2
- V	Black	Pin 3

***Output Signal** may be potentiometric, 0-10 VDC or 4-20 mA depending on the model (See Product code table).

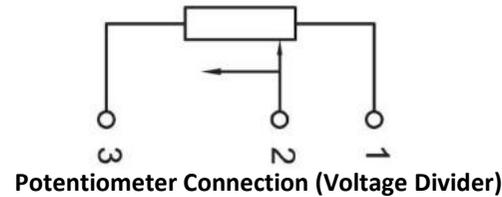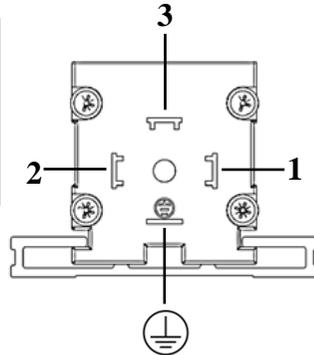

Potentiometer Connection (Voltage Divider)

Note: The GND line of the feed and signal output is common. Therefore it can be connected with 3-wire cable.

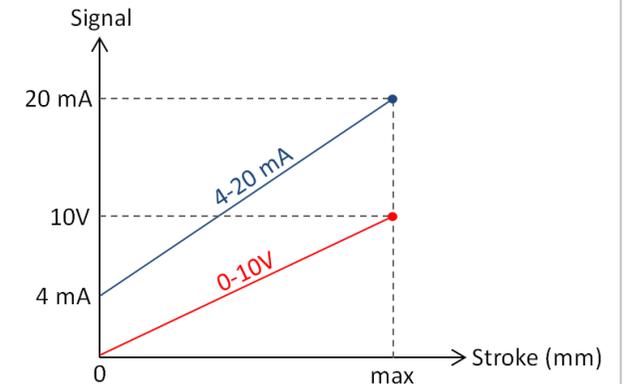

SAMPLE APPLICATION FIELDS

- Measuring /control technology
- Manufacturing engineering like woodwork machines, riveting machines, packaging machines etc.
- Hydraulic machines
- Press brakes
- Metal working machines
- Bending machines
- Assembly and test equipment
- Medical applications
- Building technology
- Textile machinery
- Other automation applications

ORDER CODE

Order Code For Analog Output

Model No		Output Signal				
LTM	-	XXX	-	X	-	XX
		A: 4-20 mA (*Optional 0-20 mA) V: 0-10 VDC				
Measuring Length (Stroke)				Electrical Connection		
Different measuring lengths between 50 mm and 1000 mm				2M: 2 meters PVC cable (std.) (*Optionally different lengths) No code: DIN 43650-A socket		

Order Code For Potentiometric Output

Model No		Resistance Value				
LTM	-	XXX	-	XX	-	XX
		5K: 5KΩ 10K: 10KΩ *Optional others				
Measuring Length (Stroke)				Electrical Connection		
Different measuring lengths between 50 mm and 1000 mm				2M: 2 meters PVC cable (std.) (*Optionally different lengths) No code: DIN 43650-A socket		

Atek Elektronik Sensör Teknolojileri Sanayi ve Ticaret A.Ş.



Украина, 79000, г.Львов, ул.Б. Хмельницкого, 176



+380673132125



<https://asu-tp.shop/>



automaticserviceu@gmail.com

