manusa 🗇

Automatic doors

CURVED SLIDING DOORS

Main features



Customized finishes.

Variety of aluminium profiles, colours and special solutions. Adaptable to any type of architectural design.



Energy efficiency and sustainability.

Two curved doors in interlock system or a circular door provides an adequate insulation from the exterior and contributes to the building energy efficiency.



User friendly.

Ideal for intense, quick, ordered and safe movement.



Wide variety of accessories.

To meet any need of access.



Wide range of settings.

Concave or convex doors, bipart or single slide, interlock system or combination of several doors to create circular doors.





Low maintenance.

Visio Manusa operators with two three phase AC motors with Direct Drive, provide unbeatable durability and low maintenance.

Typologies







SIMPLE CURVE

DOUBLE CURVE


MULTIPLE CURVE








Typologies

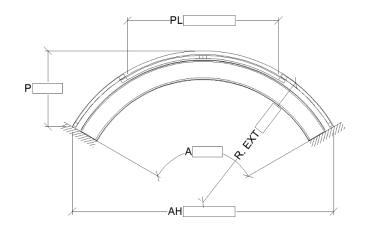

CONCAVE CURVE





CONVEX CURVE






Customized ceiling





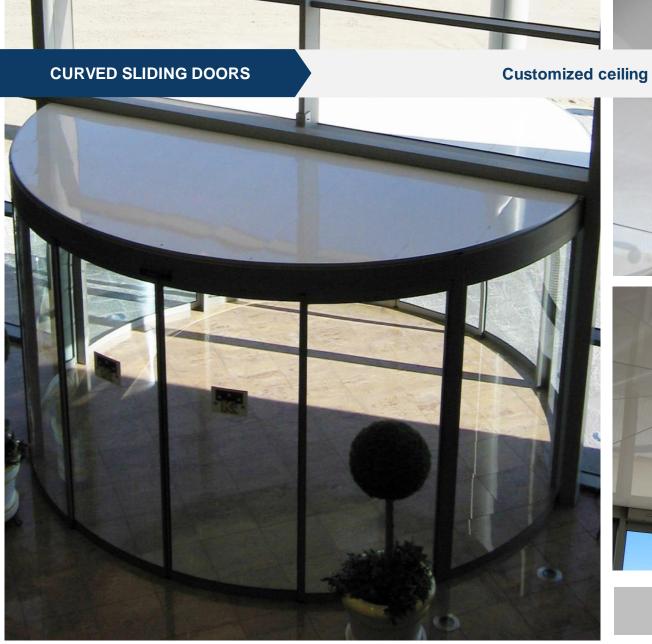





Final result

Accessories

Opening



Touch less switch



Remote control for 2/4 doors



Buzzer



Emergency stop push button

Other accessories:

- · Fail-safe batteries.
- · Mechanical redundant system.



Elbow switch

Wired or Wireless



Push-button

Wired or Wireless





Presence and motion sensor



Motion sensor



HPS AIR Lateral Safety Sensor



Wireless numeric keypad



Wired numeric keypad

Control and Communications



External key switch

Wired or Wireless



Staff Access identification



Openlinx for integrating in home automation systems.



Software Manulink 2.0 for remote control and time programming



People counter



Floor lock



Optima program switch



Smart program switch



Electromechanical lock

References

