



MODEL

EMT6144Y
embraco
Nidec
**APPROVALS**


ENGINEERING CODE
 513306221



APPROVED REFRIGERANT
 R-600a


POWER SUPPLY
 220-240 V 50 Hz


STANDARD CONDITIONS
 ASHRAE


APPLICATION
 HBP


COOLING CAPACITY
 540 W (HBP)


EFFICIENCY
 2.48 W/W (HBP)


MOTOR TYPE
 CSIR


STARTING TORQUE
 HST
DATA**General Data**

Type	Hermetic reciprocating
Technology Type	On-Off
Displacement	9,04 cm ³
Compressor Cooling	Fan/NotControlled/220
Expansion Device	Capillary Tube or Expansion Valve
Horse Power	1/5 hp
Power Supply	220-240 V 50 Hz
Evaporating Temperature Range	-15 °C to 10 °C

Electrical Data

Motor type	CSIR
Starting Torque	HST
Start Winding Resistance	21.1 Ω at 25° C
Run Winding Resistance	14.4 Ω at 25° C
Rated Load Amperage (RLA) at 50 Hz	1.35 A

Mechanical Data

Oil Charge	180 ml
Oil Type Configuration	MINERAL
Oil Type Viscosity	ISO10
Weight	7.7 Kg

Electrical Components

	Description
Starting Device	Relay MTRP-0015*
Start Capacitor	43-53 Uf / 330 V
Motor Protection	T0933/G6

External Characteristics

Tray Holder	Yes	
Connector	Internal Diameter	Shape
Suction	6.1 mm	Slanted 42° up + 45° to Back/Copper
Discharge	4.94 mm	Slanted parallel BP+24° to Back/Copper
Process	6.1 mm	Slanted 45° up + 45° to Back/Copper

PERFORMANCE

Rated Points

Condensing Temperature	Evaporating Temperature	Cooling Capacity	Power Consumption	Current	Gas Flow Rate	Efficiency
54.40°C	7.20°C	540 W	218 W	1.23 A	6.50 kg/h	2.48 W/W

Test Condition: ASHRAEHBP46, Fan/NotControlled/220, Return Gas 35°C, Evaporation 7.20°C, Condensing 54.40°C, Ambient 35°C, Liquid 46.1°C, Subcooling 8.3K. Data in accordance to EN

12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Performance Curve Data

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Current A	Gas Flow Rate kg/h	Efficiency W/W
-15	304	127	0.94	3.10	2.38
-10	381	139	0.98	3.90	2.73
-5	474	152	1.02	4.86	3.12
0	582	165	1.06	5.98	3.52
5	702	179	1.11	7.24	3.91
10	833	195	1.16	8.62	4.28

Test Condition: ASHRAEHBP46, Fan/NotControlled/220, Return Gas 35°C, Ambient 35°C, Subcooling 8.3K. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Current A	Gas Flow Rate kg/h	Efficiency W/W
-15	263	135	0.96	2.89	1.95
-10	327	149	1.01	3.60	2.2
-5	405	163	1.05	4.48	2.48
0	497	179	1.1	5.50	2.78
5	600	195	1.15	6.67	3.08
10	713	213	1.21	7.94	3.35


Test Condition: ASHRAEHBP46, Fan/NotControlled/220, Return Gas 35°C, Ambient 35°C, Subcooling 8.3K. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Condensing Temperature 55°C


Evaporating Temperature °C	Cooling Capacity W	Power W	Current A	Gas Flow Rate kg/h	Efficiency W/W
-15	217	143	0.98	2.59	1.52
-10	268	158	1.03	3.20	1.69
-5	332	174	1.09	3.98	1.91
0	408	191	1.15	4.90	2.13
5	494	209	1.21	5.95	2.36
10	588	229	1.27	7.11	2.57

Test Condition: ASHRAEHBP46, Fan/NotControlled/220, Return Gas 35°C, Ambient 35°C, Subcooling 8.3K. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Operating Envelope

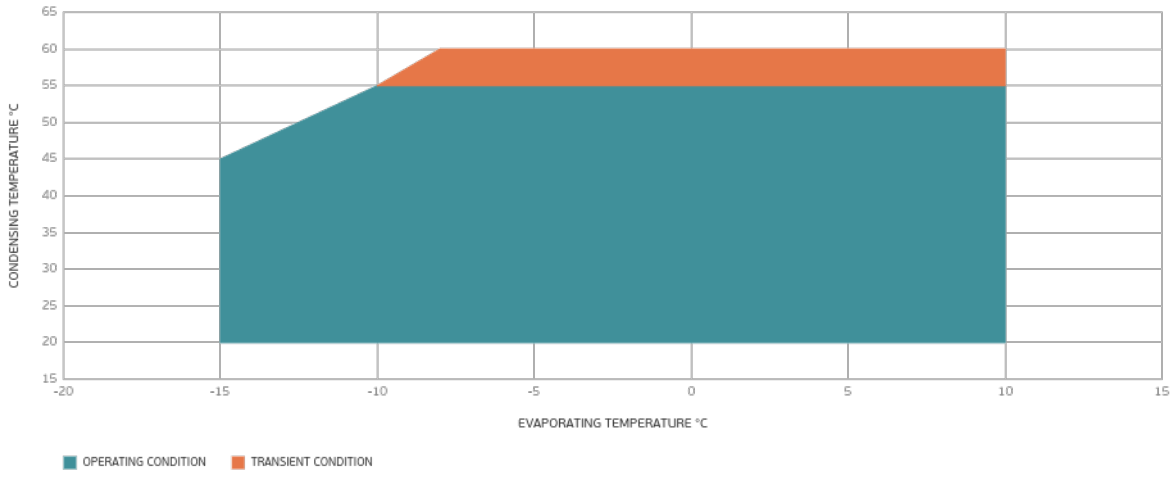

External Dimensions

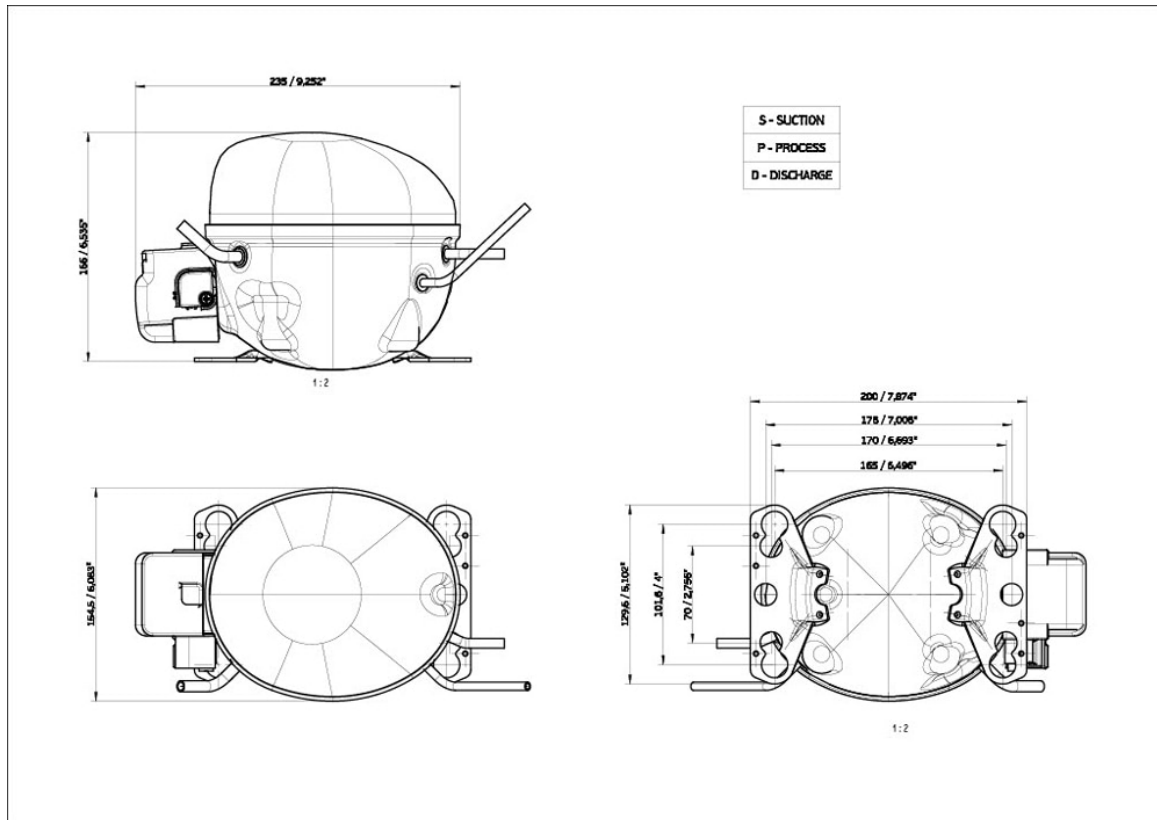

Wiring Diagram

SM28-4

