


动压 / Dynamic pressure:  $p_d = 2.95 \times 10^{-7} \times Q^2 (p_a)$

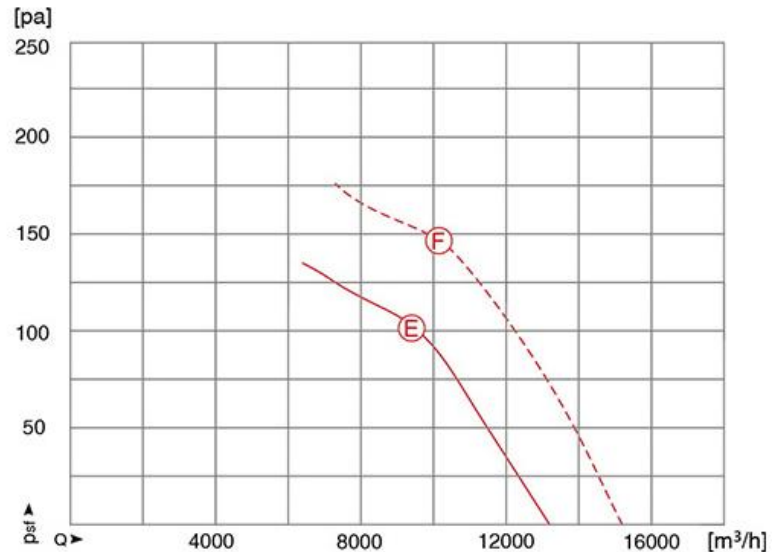

型号 MODEL	电压 UAC	频率 f	电容器 C	曲线 CURVE	输入功率 P1	转速 n	电流 I	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF. Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	°C	%	N	dB(A)	
YSWF127L65P4-□-710	3~380	50	—	A	1862	1383	3.56	240	-40~+50	36.53	41	81	
YSWF127L65P4-□-710	3~380	50	—	B	1621	1399	2.98	222	-40~+55	36.33	41.5	80	
YSWF127L65P4-□-710	3~380	60	—	C	2340	1594	3.98	278	-40~+50	35.49	39	83	
YSWF127L65P6-□-710	3~380	50	—	D	1022	922	2.49	93	-40~+70	25.82	31.9	75	
YSWF127L65P6-□-710	3~380	50	—	E	803	944	2.33	102	-40~+75	33.49	40.3	74	
YSWF127L65P6-□-710	3~380	60	—	F	1205	1081	2.47	148	-40~+75	34.74	40.5	77	

注：性能曲线在安装马尔导风圈时测得；□表示安装附件。

Note: the performance curve obtained by installation MAER wall plate measurement ; □ express installation accessories.