


DIN 7504 K - sim. ISO 15480

Self drilling screws type K

hexagon head with flange

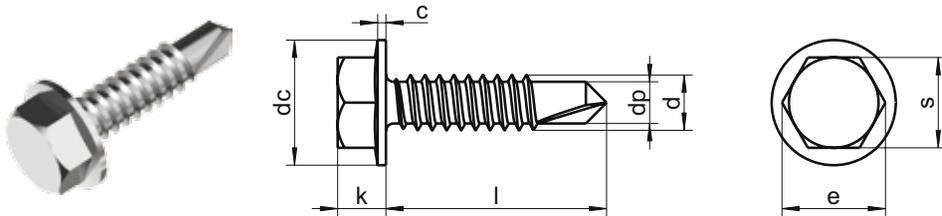

dp	2,8	3,1	3,6	4,1	4,8	5,8
s	5,5	5,5	7	8	8	10
c	0,6	0,6	0,9	0,9	1,0	1,0
k max.	3,45	3,45	4,25	4,45	5,45	6,45
dc max.	8,3	8,3	8,8	10,5	11,0	13,2
e min.	5,96	5,96	7,59	8,71	8,71	10,95
●	5,5	5,5	7	8	8	10
Length / Ø	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
9,5 (3/8")	▲	▲	▲	▲	▲	
13 (1/2")	▲	▲	▲	▲	▲	
16 (5/8")	▲	▲	▲	▲	▲	
19 (3/4")	▲	▲	▲	▲	▲	▲
22 (7/8")	▲	▲	▲	▲	▲	▲
25 (1")	▲	▲	▲	▲	▲	▲
32 (1 1/4")		▲	▲	▲	▲	▲
35 (1 3/8")		▲	▲	▲	▲	▲
38 (1 1/2")		▲	▲	▲	▲	▲
45 (1 3/4")				▲	▲	▲
50 (2")				▲	▲	▲
60 (2 3/8")					▲	
70 (2 3/4")					▲	
80 (3 1/8")					▲	
90 (3 1/2")					▲	
100 (4")					▲	
110 (4 1/4")					▲	
120 (4 3/4")					▲	
130 (5 1/8")					▲	
SU	1000	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200	200	200

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other measurements on request.

Example item no. 7504-2-4,2X38K DIN 7504 - A2 - Ø 4,2mm - l = 38mm - form K

Please note that self drilling screws, made of stainless steel are mainly suitable for the processing in aluminium and thin stainless steel sheets. Self drilling screws, hexagon head with flange DIN 7504 K are available in other dimensions and A4 on request. Self drilling hexagon head screws with flange and EPDM-washers can be found as WS 9165 in this catalogue.