

# Intelligent Power Mate


## iSitePower-M



### Introduction

iSitePower-M is a small-scale hybrid power solution. It integrates power supply, backup power, and management. It is widely used in off-grid and unreliable grid areas and provides reliable and stable backup power for residences, apartments, shops, and emergency scenarios.

iSitePower-M features a high-density design, small size, light weight, and IP65 protection level. It can be installed indoors, or on outdoors

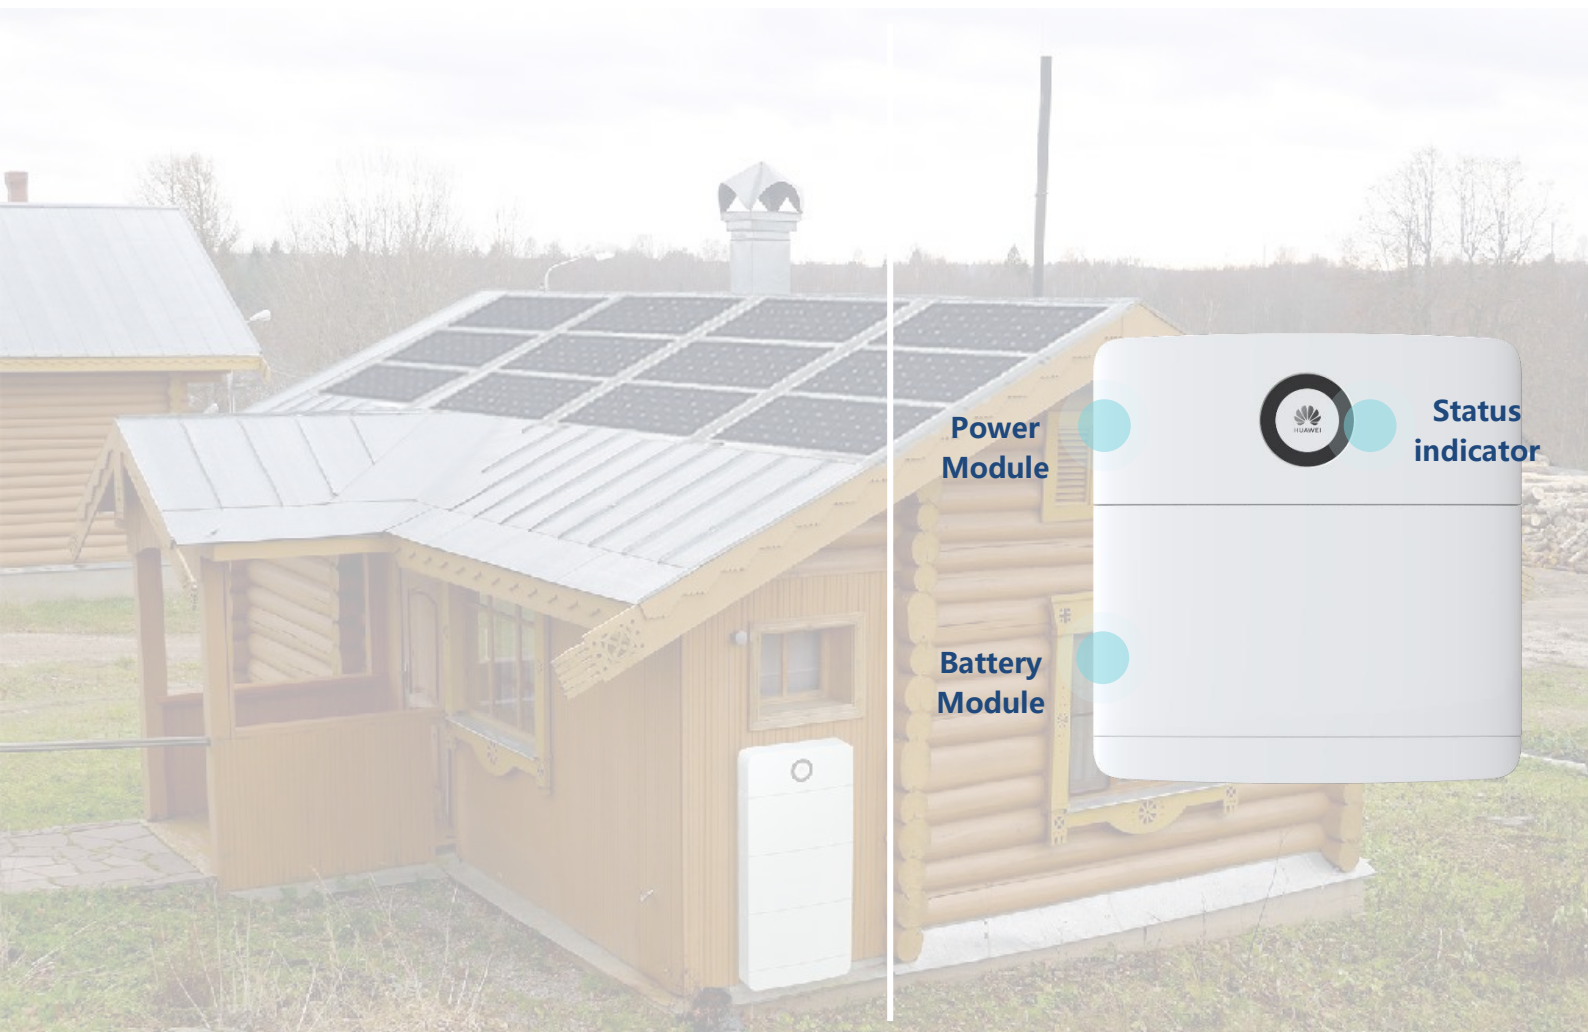

### Application

- Indoor & outdoor scenario, wall-mounted/floor-mounted
- Off-grid and unreliable grid areas, civil and commercial backup power
- Residences, apartments, shops, and emergency scenarios

## Product parameters

Basic Parameters	Dimensions (W x H x D)	Single power module: 700 mm x 246 mm x 152 mm Single battery module: 700 mm x 390 mm x 158 mm Base (mandatory for floor installation): 700 mm x 55 mm x 147 mm Base (mandatory for wall-mounted installation): 700 mm x 118 mm x 184 mm
	weight	Approx. 17 kg for a single power module Approx.50 kg for a single energy storage module
	Installation Mode	Wall-mounted/ground-mounted
	Degree of protection	IP65
AC input	Input voltage system	Single-phase 200/208/220/230/240 VAC, 220 V AC by default
	Input voltage range	± 20%
	Input current	Max. 30 A
	Frequency	50/60Hz
PV input	lightning protection	Differential mode: 3KA; common mode (two-wire pair PE): 5KA; 8/20 μs
	Start-up voltage	100V DC
	Maximum input voltage	435V DC
	MPPT voltage range	90-420V DC
	Rated input voltage	345V DC
	Maximum input capacity of the MPPT	5.5KWp
	PV string quantity	2 strings
	Number of MPPT channels	1 channel
	Maximum input current	2*15A
	Maximum short circuit current	2*18A
AC output	lightning protection	10 kA common mode (two-wire pair PE), 8/20 μs
	Output voltage system	Single-phase 200/208/220/230/240 VAC, 220 V AC by default
	Output frequency	50/60 Hz. The default value is 50 Hz.
	Maximum output current	30A
	Input and output power	6kVA/5kW
Bypass input power	THD	≤ 3% R load
	Maximum bypass input power	6kW
overload capacity	102% ≤ Load ≤ 125%	30S
	125% < Load ≤ 150%	10s
	> 150%/short circuit	0.3S

## Specifications

Battery parameters	Output input voltage	370-480VDC
	Rated capacity <sup>1</sup>	5 kWh per module
	Maximum capacity	Single system scenario: max. support 6 pcs batteries, 5 kW output (5Kw@30kWh) Parallel system scenarios: max. 3 power modules can be paralleled. Each power module supports max. 3 batteries (15Kw@45kWh)
	Maximum output power	2.5 kW per module
	cycle life	6000 times @ 25°C, 80% DOD
AC parallel box	Dimensions (W x H x D)	350 mm x 450 mm x 150 mm
	weight	Approx. 12 kg
	Input voltage	200/208/220/230/240 V AC. The default value is 220 V AC.
	Input current	Maximum 90A
	Output voltage	200/208/220/230/240 V AC. The default value is 220 V AC.
	Output current	Max. 90A
	Cable outlet mode	Bottom in and bottom out
	Installation Mode	Wall-mounted or pole-mounted installation
Environmental parameters	Degree of protection	IP55
	Operating temperature	0°C to 45°C (without +1120w/m <sup>2</sup> solar radiation)
	Transport temperature	- 40°C -- 70°C
	Storage temperature	- 40°C -- 70°C
	relative humidity	5%-95% (RH)
	Altitude Requirements	0~4000m (The operating temperature decreases by 1°C per 200m when the altitude is 2000 m to 4000 m.)
	Noise level	When temperature is 30°C, the noise is ≤40 dBA@1 m.

1. Test conditions: 100% depth of discharge(DoD), 0.2C rate charge & discharge at 25°C, at the beginning of life. If no PV modules are installed or the system has not detected sunlight for at least 24 hours, the minimum end of discharge SOC is 15%.

Copyright © Huawei Technologies Co., Ltd. 2021. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

### General Disclaimer

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

**HUAWEI TECHNOLOGIES CO., LTD.**

Huawei Industrial Base

Bantian Longgang

Shenzhen 518129, P.R. China

Tel: +86-755-28780808

[www.huawei.com](http://www.huawei.com)