


# CF/RB3-20

optical fibers



Micro Detectors

Italian Sensors Technology

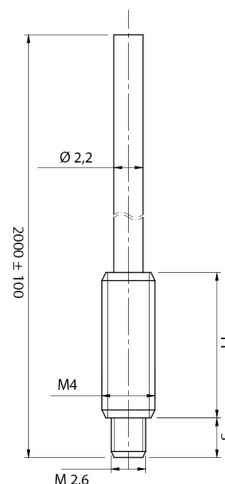

Indicative image

## Detection properties

Distance with SSF	120 mm
Distance with FS1	120 mm
Distance with FX3	700 mm
Distance with FX4	700 mm
Distance with F1R	150 mm

## Application

Function Principle	Emitter + Receiver
Description	Plastic optical fibres
Optic position	Axial

## Mechanical data

Operating temperature	-40°C....+55°C (posa fissa)
1	2
1 mm	1 mm

M4 con sleeve	M4
vetro, ETM, inox	PE, plastic
ottone nichelato	nickel-plated brass

## Test/Approvals

Degree of protection IP67

## Accessories

Accessories to be ordered separately AF/ER9

---

### **M.D.Micro Detectors S.p.A.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

### **date of printing**

16/12/2021 13:23:17