


KOCES Double Inlet Centrifugal Fan



Description :

KOCES fans are used for suction and discharge in Cabinet, Ventilation units, Central Air-conditioner units, etc. Each fans are suit its mechanical design according to maximum operating limits


MOTOR INSULATION CLASS	B CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR ENCLOSURETYPE	AC - TEFC
BODY MATERIAL	SHEET METAL
BODY COATING	ELECTROSTATIC POWDER COATING
IMPELLER TYPE	FORWARD CURVED
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1



TECHNICAL SPECIFICATIONS

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REV. (RPM)	FLOW RATE (m3/h)	SOUND PRESSURE dB(A) 3m	WEIGHT (KG)
KOCES	230	50	400	1.250	2.200	45	10.3
Values are for 0 Pa							

TECHNICAL DRAWING

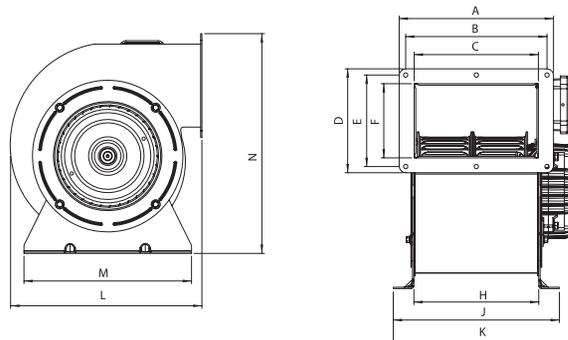

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	J (mm)	K (mm)	M (mm)	L (mm)	N (mm)
KOCES	258	234	197	194	169	133	210	269	310	252	339	396

KOCES Performance Curves

