

# MVP/A0-0A

cylindrical photosensors




Micro Detectors

Italian Sensors Technology



Indicative image

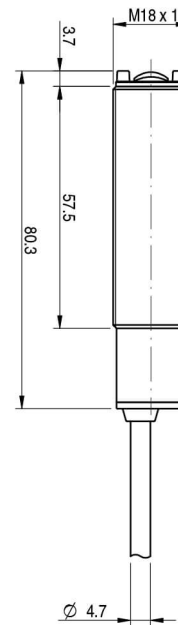

## Detection properties

Nominal sensing distance	3.500mm
Thermal drift of Sr	$\leq 10\%Sr$
Repeat Accuracy	5%
Sensitivity adjustment	No

## Application

Function Principle	Polarized
Notes	With standard reflector $\phi$ 80mm (RL110 supplied separately)
Optic position	Axial

## Outputs

Output type	TRIAC
Output Function	NO

Switching frequency 25Hz

## Electrical data

Operating Voltage	20...253Vac/50...60Hz
No-Load supply current	≤30mARMS
Load current	5...300mARMS
Leakage current	6A
Output voltage drop	≤3V IL=300mA
Max ripple content	≤ 10%
LED indicators	Red
Time delay before availability	200ms
Emission	Red(660nm)
Interference to external light	3.000lux (incandescent lamp), 10.000lux (sunlight)

## Mechanical data

Dimensions	M18x1/L=78,9mm
Weight	100g
Housing Material	PBT / PC cable exit
Connections	2m PVC cable
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 60° C (without freeze)
Diameter/Dimension	M18

## Test/Approvals

Approvals	CE, cRUus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67


## Accessories

Supplied Accessories Metallic nut (2x)

---


# ELECTRICAL DIAGRAMS OF THE CONNECTIONS

---

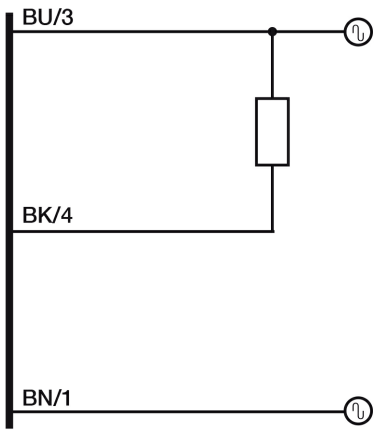


# RESPONSE CURVES


## Dimensione Spot

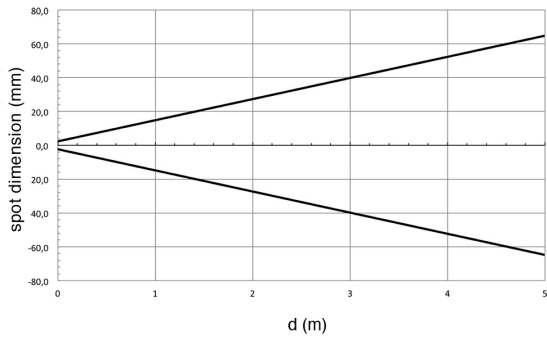

## Disassamento Parallelo

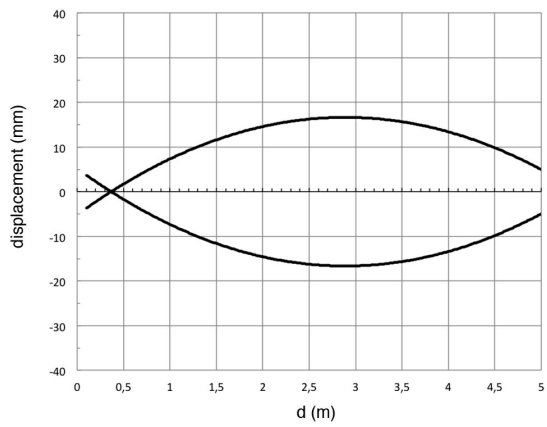

## Eccesso di Guadagno

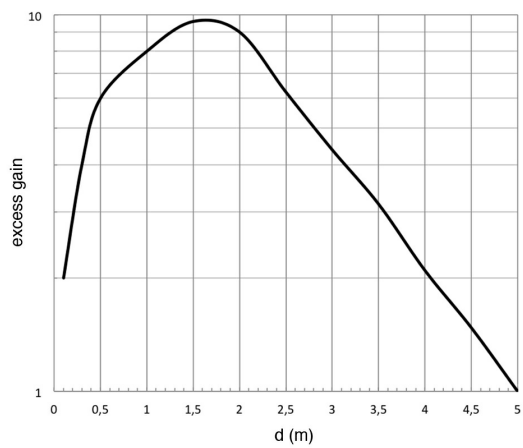

---

**M.D.Micro Detectors S.p.A.**

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

**date of printing**

03/01/2022 13:25:30