




ЕЛЕКТРОЕЛАН

м. Дніпро, вул. Генерала Пушкіна, буд. 1

тел.: +38067 867 63 29 тел.: +38050 362 10 34

www.electroelan.dp.ua

email: electroelan@gmail.com



Nowodvorski
LIGHTING



CUMULUS M 9715


CUMULUS M 6977

CUMULUS L 6978

CUMULUS S 6976



CUMULUS L 6978




CUMULUS S

plastic PE

6976

1xE27, max 40W

IP44

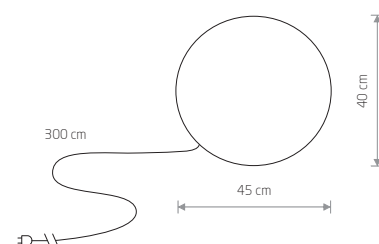


CUMULUS M

plastic PE

6977

1xE27, max 60W

IP44

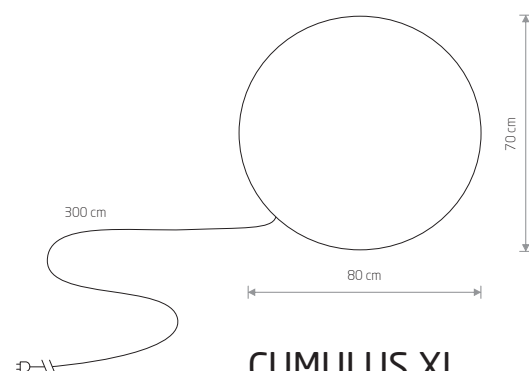


CUMULUS XL

plastic PE

9714

1xE27, max 60W

IP44

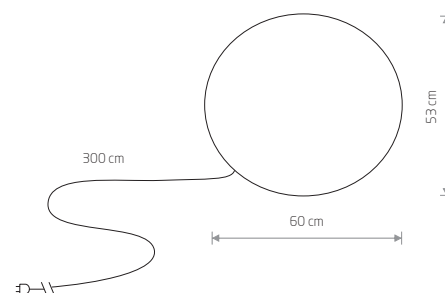

CUMULUS L

plastic PE

6978

1xE27, max 60W


IP44



CUMULUS S 9751



CUMULUS M 9715




CUMULUS S

plastic PE, painted steel

9751

1xE27, max 60W

IP65




CUMULUS M

plastic PE, painted steel

9715

1xE27, max 60W

IP65






CUMULUS L

plastic PE


9607

1xE27, max 60W

IP65

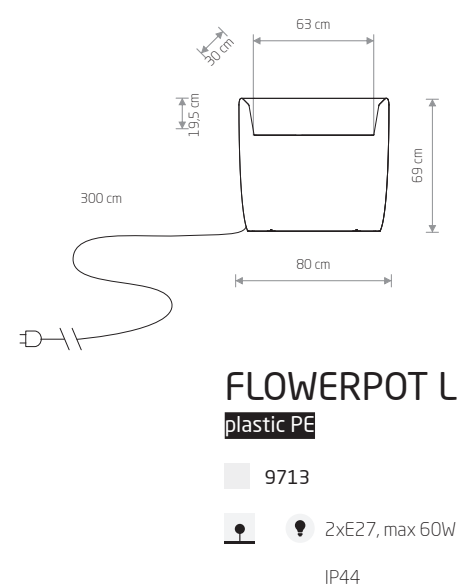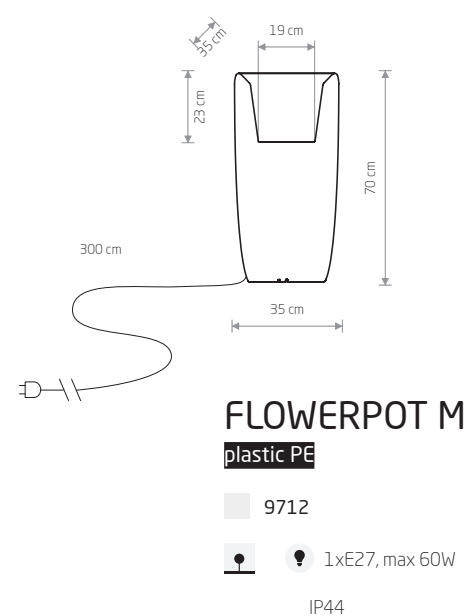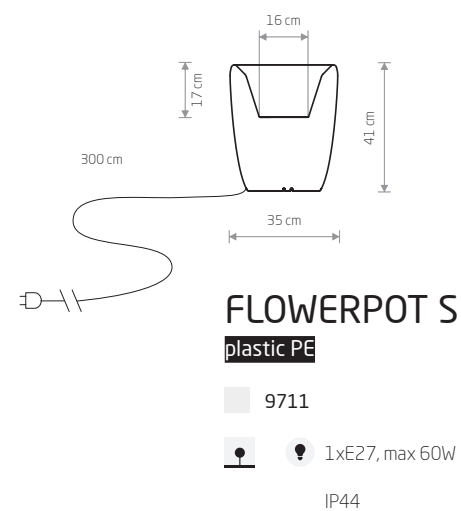

FLOWERPOT S 9711

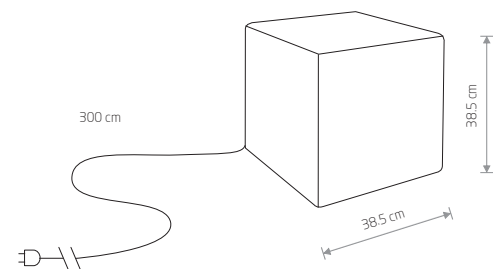

CUMULUS CUBE M

plastic PE

8966

1xE27, max 60W

IP44



STAR

plastic PE

9426

1xE27, max 40W

IP44

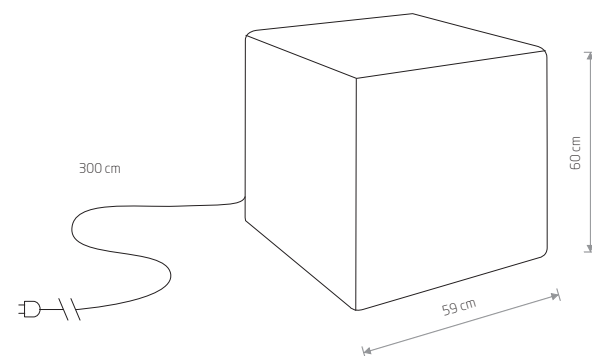

CUMULUS CUBE L

plastic PE

8965

1xE27, max 60W

IP44


GALAXY


plastic PE, painted steel

9246

1xE27, max 40W

IP65

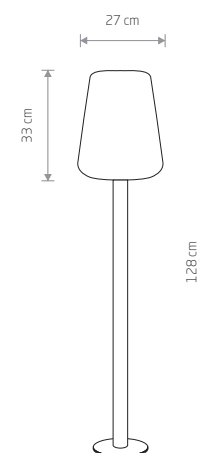




STRUCTURE LED

painting aluminum, plastic PC

8146

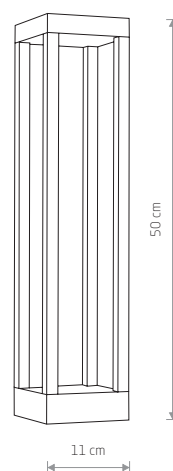

STRUCTURE LED

painting aluminum, plastic PC

8145



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8145	13W LED	3000K	820 lm	120°	≥80	~220-230 V, 50/60 Hz	⊕	>0,9	IP54	20000h
8146	13W LED	3000K	820 lm	120°	≥80	~220-230 V, 50/60 Hz	⊕	>0,9	IP54	20000h

BLACK



STRUCTURE LED 8145




SYMMETRY LED 8176

SYMMETRY LED

painting aluminum, plastic PC


8176




SYMMETRY LED

painting aluminum, plastic PC

8180

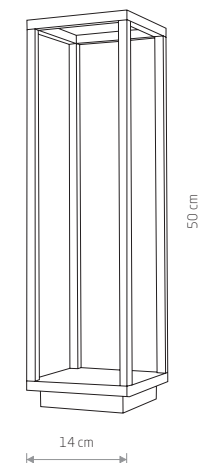

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8176	7W LED	3000K	212 lm	67 °	85	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	30000h
8180	7W LED	3000K	388 lm	66 °	85	~220-230 V, 50/60 Hz	⊕	>0,85	IP54	30000h

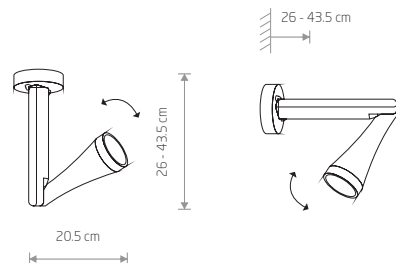


OTTAWA

■ painted aluminum, glass

■ 9562

■ 1xGU10, max 35W

IP44




SOUL

■ painted aluminum, glass

■ 9555

■ 1xGU10, max 35W

IP44



OTTAWA

■ painted aluminum, glass

■ 9561

■ 1xGU10, max 35W

IP44




OTTAWA

■ painted aluminum, glass

■ 9563

■ 1xGU10, max 35W

IP44



SOUL

■ painted aluminum, glass

■ 9557

■ 1xGU10, max 35W

IP44




SOUL 9557



TUBINGS M 8161




TUBINGS 8158




TUBINGS S
painted aluminum, glass

- 8160
- 1xGU10, max 35W
- IP54




TUBINGS M
painted aluminum, glass, plastic

- 8161
- 1xGU10, max 35W
- IP54

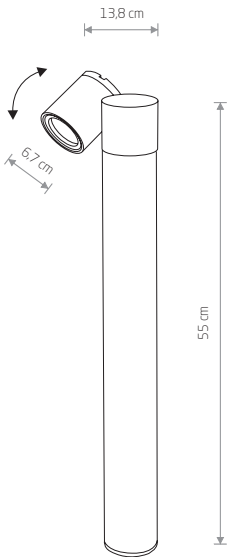

TUBINGS
painted aluminum, glass


- 8158
- 1xGU10, max 35W
- IP54



SPIKE LED S

painting aluminum, glass

9101




SPIKE LED M

painting aluminum, glass, plastic

9100



BUSH 3401



BUSH

painting aluminum, glass

3401




1xGU10, max 35W

IP65

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9100	5W LED	3000K	330 lm	30 °	>80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
9101	5W LED	3000K	330 lm	30 °	>80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h




THIKA LED 9118




THIKA LED B
painted aluminum, glass

9120



THIKA LED A
painted aluminum, glass

9121

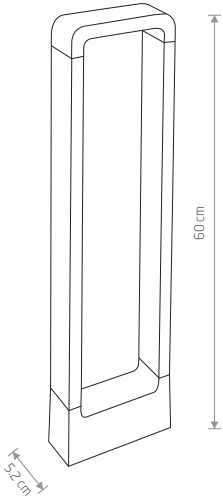


THIKA LED
painted aluminum, glass

9118



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9118	9W LED	3000K	550 lm	39 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	20000h
9120	15W LED	3000K	1035 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP54	20000h
9121	10W LED	3000K	996 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP54	20000h




RIO

painting aluminum, plastic PC

4424

2xE27, max 40W

IP54




RIO

painting aluminum, plastic PC

4423

1xE27, max 40W

IP54




RIO SENSOR

painting aluminum, plastic PC

7017

1xE27, max 40W

IP54

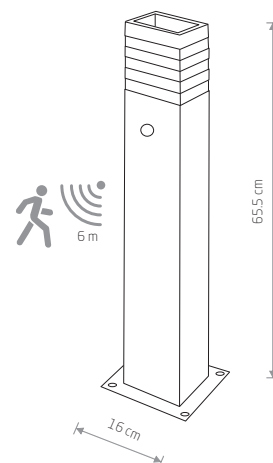

RIO SENSOR

painting aluminum, plastic PC

9097


1xE27, max 40W

IP54

BLACK



RIO SENSOR 9097




ROCK

graphite painted aluminum, plastic PC

3406

1xE27, max 60W

IP44




ROCK

graphite painted aluminum, plastic PC

3405

1xE27, max 60W

IP44




ROCK

graphite painted aluminum, plastic PC

3407

2xE27, max 60W

IP44




FOG

graphite painted aluminum, glass

3403

1xE27, max 60W

IP44




FOG

graphite painted aluminum, glass

3402

1xE27, max 60W

IP44




FOG

graphite painted aluminum, glass


3404

2xE27, max 60W


IP44




NEGRO
painted aluminum, glass
4425
1xGU10, max 35W
IP54




NEGRO
painted aluminum, glass
4426
2xGU10, max 35W
IP54



EXE
painted aluminum, glass
8331
1xGU10, max 35W
IP54




EXE
painted aluminum, glass
8330
2xGU10, max 35W
IP54



SIERRA

■ painted aluminum, plastic PC


■ 4421
■ 1xE27, max 40W
IP54



SIERRA

■ painted aluminum, plastic PC


■ 4422
■ 2xE27, max 40W
IP54



BRICK

■ painted aluminum, glass


■ 3408
■ 1xE27, max 60W
IP65



ORINOKO

■ painted aluminum, plastic PC

■ 4387
■ 1xE27, max 20W
IP44




UNIT LED

■ painted aluminum

■ 9122
■

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9122	2x5W LED	3000K	727 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,89	IP54	20000h

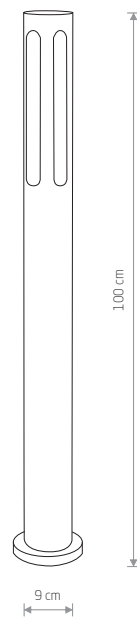


MEKONG
painted aluminum, glass

4698

1xE27, max 18W

IP42




MEKONG
painted aluminum, glass

4418

1xE27, max 18W

IP42

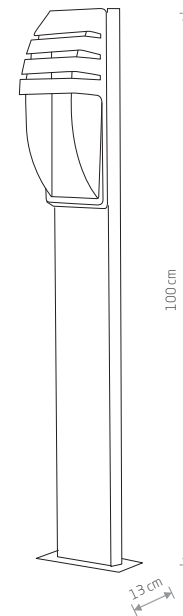


MISTRAL
painted aluminum, plastic PC

3394

1xE27, max 23W

IP44




MISTRAL
painted aluminum, plastic PC

3393

1xE27, max 23W

IP44



MISTRAL
painted aluminum, plastic PC

4390

1xE27, max 23W

IP44






AMUR 4692




AMUR 4693




AMUR
painted aluminum, glass

4692
1xE27, max 60W
IP23



AMUR
painted aluminum, glass

4693
1xE27, max 60W
IP23



AMUR
painted aluminum, glass

4694
1xE27, max 60W
IP44



TYBR 4685




TYBR 4684




TYBR
painted aluminum, glass

4686
1xE27, max 60W
IP44



TYBR
painted aluminum, glass

4684
1xE27, max 60W
IP44




TYBR
painted aluminum, glass

4685
1xE27, max 60W
IP44



TAY 5294




TAY

5292
painted aluminum, glass

5292

1xE27, max 60W

IP23

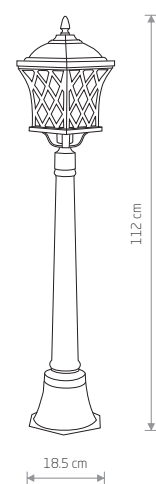

TAY

5294
painted aluminum, glass

5294

1xE27, max 60W


IP23



TAY 5292



SPEY 5290



SPEY

5290
painted aluminum, glass


5290

1xE27, max 60W

IP23



SPEY 5291



SPEY

5291
painted aluminum, glass


5291

1xE27, max 60W

IP23

BLACK

BLACK

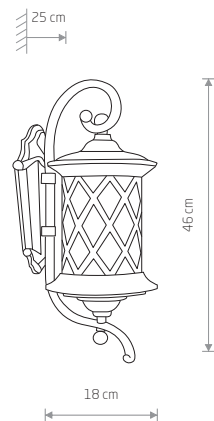


LANTERN

■ painted aluminum, glass

■ 6911

■ 1xE27, max 60W

IP23



DON

■ painted aluminum, glass

■ 4687

■ 1xE27, max 60W

IP44


QUARTZ

■ painted aluminum, plastic PC

■ 3411

■ 1xE27, max 60W

IP21



QUARTZ SENSOR 7016


QUARTZ SENSOR

■ painted aluminum, plastic PC

■ 7016

■ 1xE27, max 60W

IP21




INDUS


■ painted aluminum, glass

■ 4440

■ 2xE27, max 15W


IP44



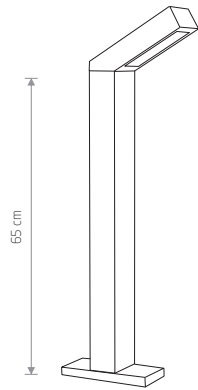

LHOTSE LED
painted aluminum, plastic PC

■ 4448

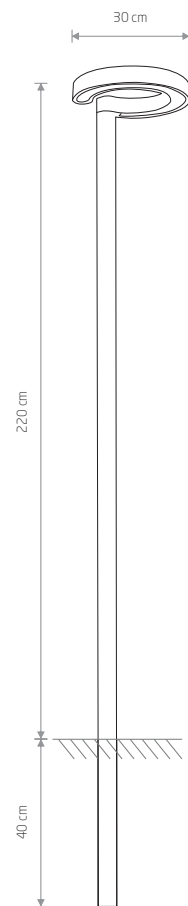


POLE LED
painted aluminum, plastic PC

■ 9185




TEPIC LED
painted aluminum

■ 9508




MONTERREY LED
painted aluminum

■ 9507



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9508	9W LED	3000K	395 lm	31 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,85	IP54	10000h
9507	9W LED	3000K	410 lm	39 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,85	IP54	10000h
4448	9W LED	3000K	169 lm	72 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,79	IP54	10000h
9185	20W LED	3000K	950 lm	54 °	>80	~220-230 V, 50/60 Hz	⊕	>0,94	IP54	30000h

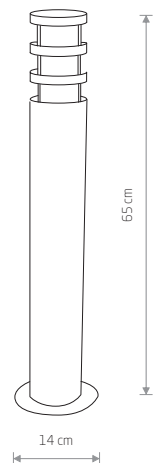

NORIN
painted aluminum, glass

■ 4446

● 1xE27, max 20W



IP44

OIR
painted aluminum, plastic PC

■ 9158

● 1xE27, max 40W

IP44

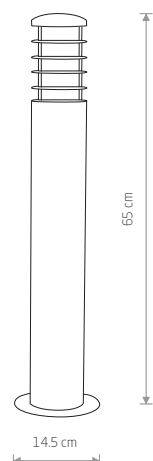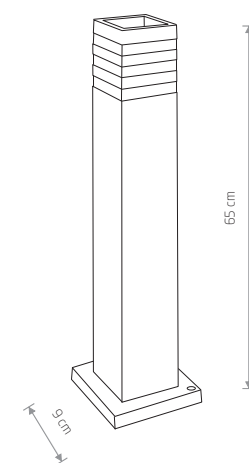

HORN
painted aluminum, glass

■ 4906

● 1xE27, max 20W


IP44

SIROCCO
aluminum, glass

■ 3396


● 1xE27, max 60W

IP44

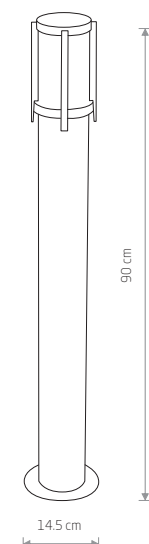




PATHWAY LED M 9252

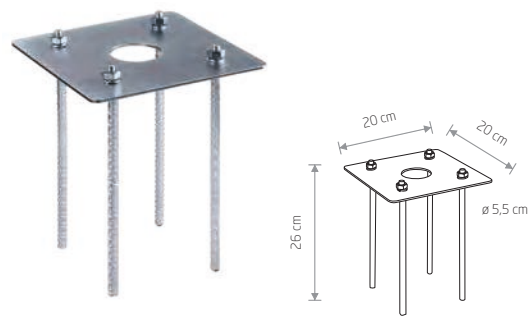

PATHWAY FOUNDATION KIT

steel


8795



PATHWAY LED S

painted steel, painted aluminum


9420



PATHWAY LED M

painted steel, painted aluminum

9252

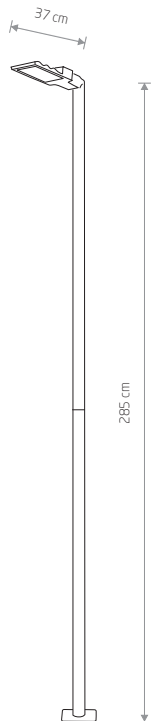

PATHWAY LED L


painted steel, painted aluminum

9125




OUTDOOR LIGHTING


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9420	24W LED	3000K	2200 lm	100 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h
9252	24W LED	3000K	2200 lm	100 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h
9125	36W LED	3000K	3600 lm	100 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,9	IP44	30000h



PUEBLA LED
painted aluminum, plastic PC




MERIDA LED
painted aluminum, plastic PC



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9513	12W LED	3000K	538 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,93	IP54	20000h
9514	12W LED	3000K	538 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,93	IP54	20000h



HEXA 9565




HEXA
painted aluminum, glass






EDESSA LED M 9107

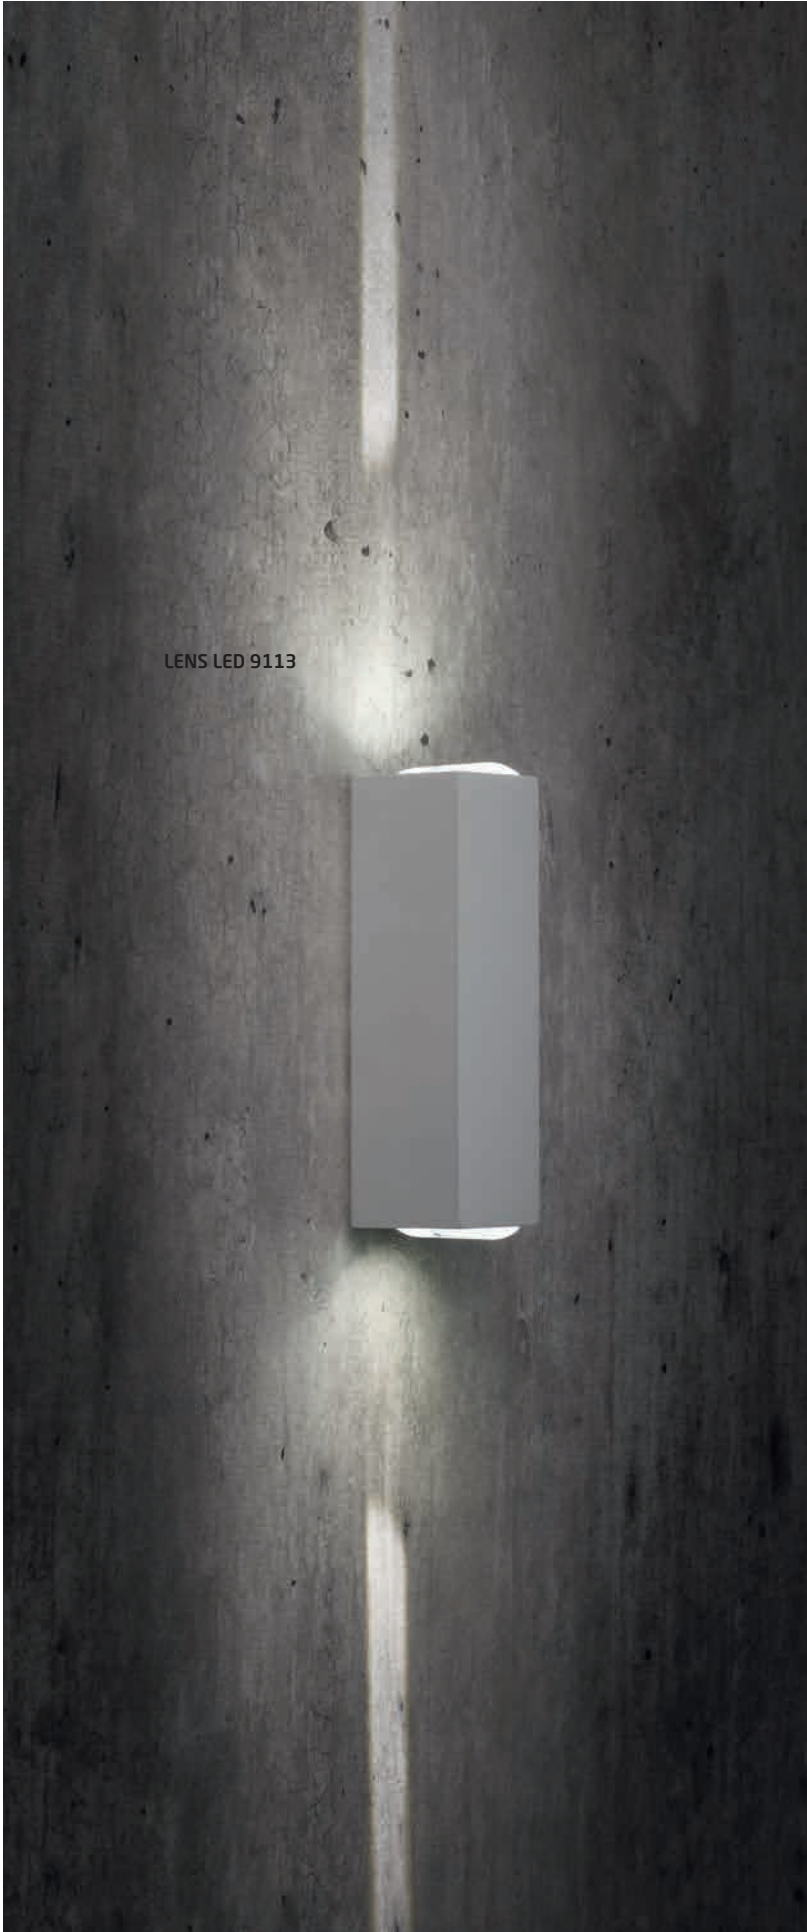

LENS LED 9112

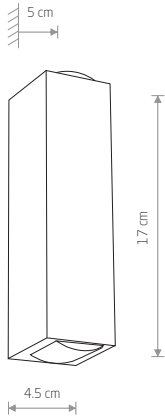


LENS LED
painted aluminum, glass

9112 9113



EDESA LED M 9108




EDESA LED M
painted aluminum, glass

9108 9107



EDESA LED S 9110



EDESA LED S
painted aluminum, glass

9111 9110



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9112	2x2W LED	3000K	40 lm	10°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
9113	2x2W LED	3000K	59 lm	10°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
9107	7W LED	3000K	530 lm	68°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
9108	6W LED	3000K	460 lm	68°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
9110	3W LED	3000K	220 lm	52°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
9111	3W LED	3000K	220 lm	52°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h



NOOK 7965



NOOK 7972



NOOK 7970





NOOK 7978



NOOK 7976



NOOK 7965

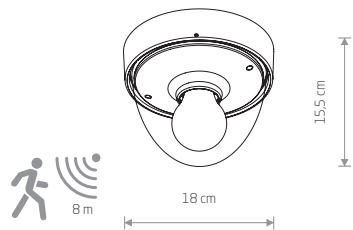

NOOK

plastic ABS, plastic PC

7972 7970 7965

7976 7978

1xE27, max 10W only LED

IP44

NOOK SENSOR

plastic ABS, plastic PC

7971 7968 7964


7975 7977

1xE27, max 10W only LED

IP44



TAHOE 7611



TAHOE

plastic PC, plastic ABS

3118 3250

1xE27, max 23W

IP65



TAHOE 3242

TAHOE

plastic PC, plastic ABS

3240 3251


3242 7611

2xE27, max 23W

IP65



TAHOE 8831




TAHOE SENSOR

plastic PC, plastic ABS


8831 8830

2xE27, max 23W

IP65

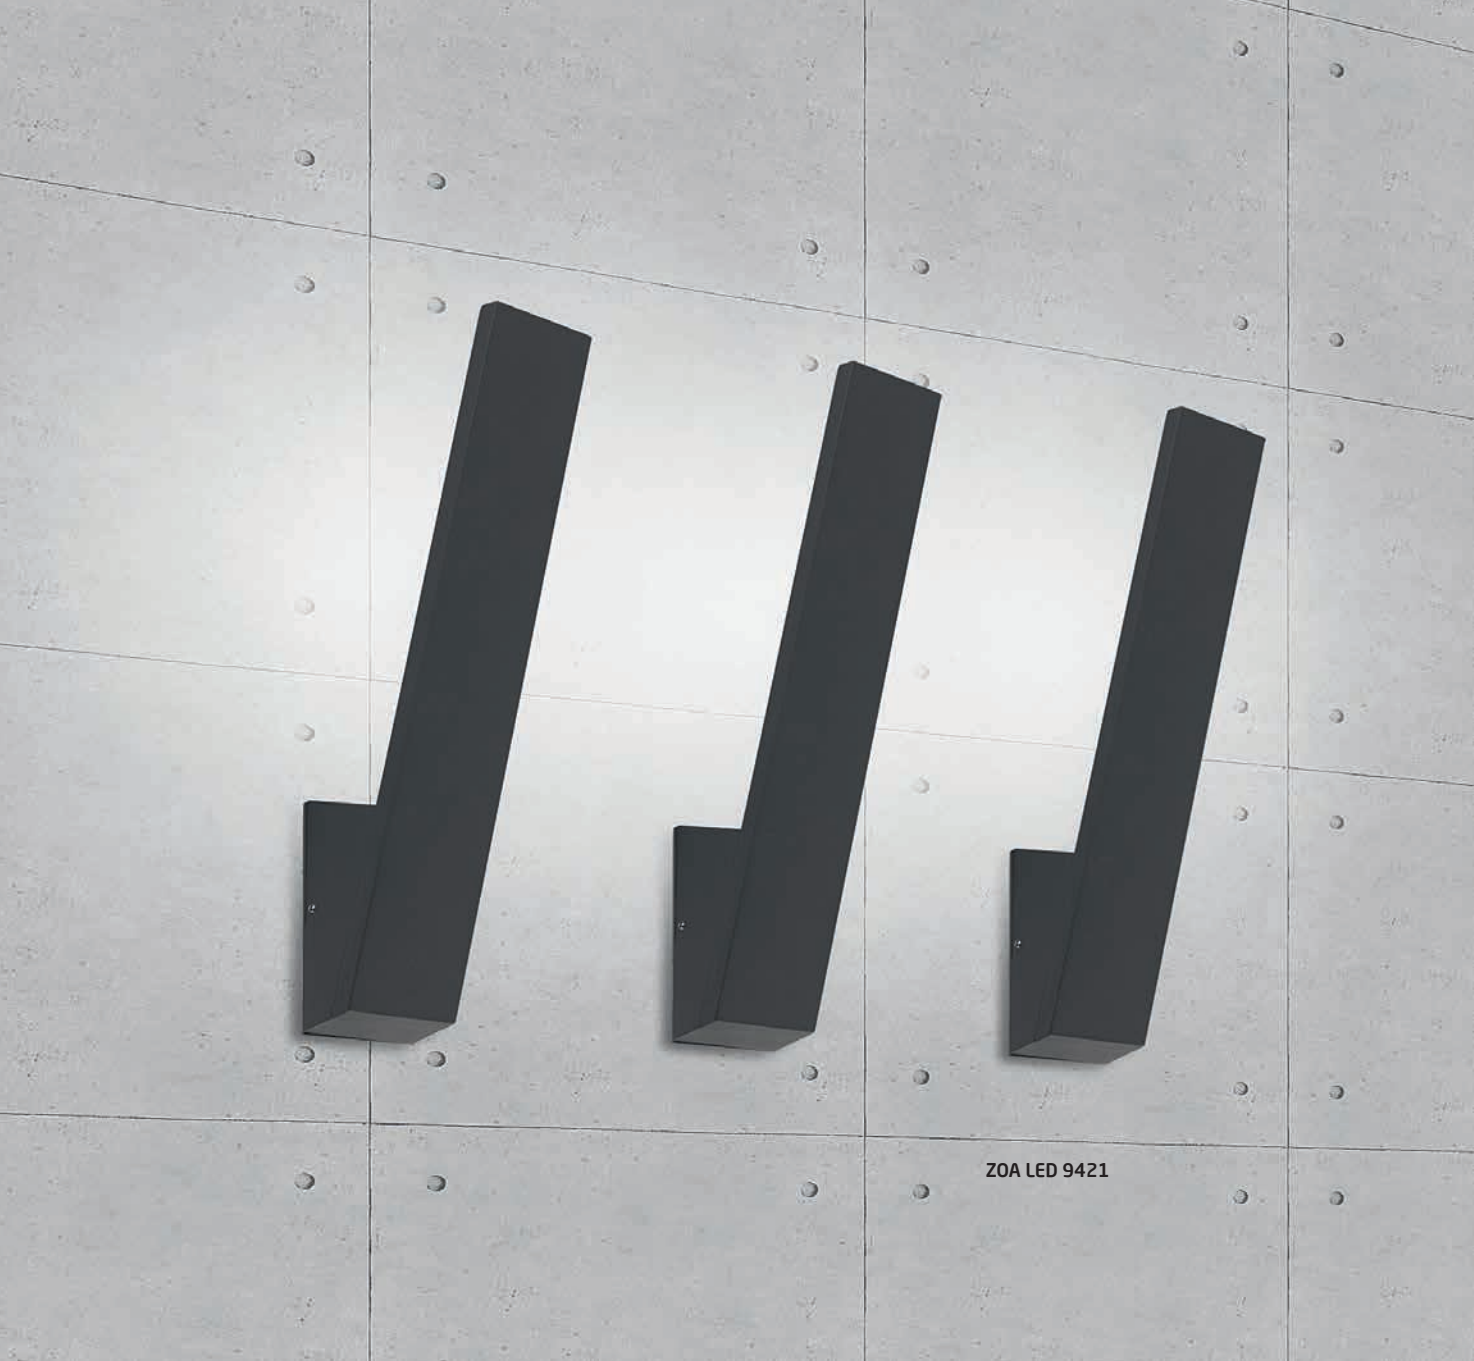

ZOA LED 9421




ZOA LED
painted aluminum, glass

9421



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9421	10W LED	3000K	795 lm	110 °	≥ 81	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	20000h

GRAPHITE




SINUS
painted aluminum, glass

8144




1xGU10, max 35W
IP54



PATRAS LED
painted aluminum, glass

9115



MUNO LED
painted aluminum, glass


6776



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9115	4x1W LED	3000K	320 lm	38 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h
6776	6W LED	3000K	242 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,54	IP54	8000h

BLACK




GRAPHITE



ELLIPSES LED

painting aluminum, glass

8140 8182 8181



TRIANGLES LED

painting aluminum, glass


8143 8142 8141



LIMA LED

painting aluminum

9510



KHUMBU


painting aluminum, glass

4443




1xG9, max 40W

IP44



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8140	2x5W LED	3000K	800 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	10000h
8141	2x5W LED	3000K	750 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	> 0,5	IP54	10000h
8142	2x5W LED	3000K	700 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	10000h
8143	2x5W LED	3000K	800 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	10000h
8181	2x5W LED	3000K	750 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	10000h
8182	2x5W LED	3000K	700 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	10000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9510	6W LED	3000K	400 lm	97 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP54	10000h



ASSOS

9123
painted aluminum, glass


9123
1xGU10, max 10W
IP54



ASSOS

9124
painted aluminum, glass


9124
2xGU10, max 10W
IP54



ARRIS

9516
steel, glass


9516
1xGU10, max 10W
IP54



ARRIS

9515
steel, glass


9515
2xGU10, max 10W
IP54



NICO

9518
painted aluminum, glass


9518
1xGU10, max 10W
IP54



NICO

9517
painted aluminum, glass


9517
2xGU10, max 10W
IP54



PEAK LED
painted aluminum, glass

■ 4441


■



DRAS LED
painted aluminum, glass

■ 4442

■



SEMI LED
painted aluminum, glass

■ 6775


■

PRIMM
painted aluminum, glass

■ 9551

■ 1xGU10, max 10W

IP54




FALLON
painted aluminum, glass

■ 9552

■ 1xGU10, max 10W


IP54



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
4441	2x3W LED	3000K	62 lm	83 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,91	IP54	10000h
4442	2x3W LED	3000K	122 lm	65 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,91	IP54	10000h
6775	7W LED	3000K	242 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,54	IP54	8000h




BAY LED M 8165



BAY LED
painted aluminum, plastic PC

8164

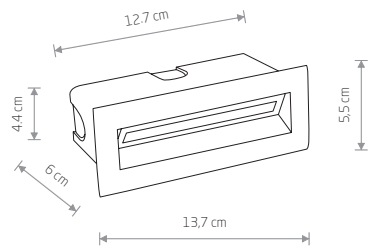


BAY LED
painted aluminum, plastic PC

8165




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8164	3W LED	3000K	200 lm	54 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP65	10000h
8165	5W LED	3000K	360 lm	51 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP65	10000h

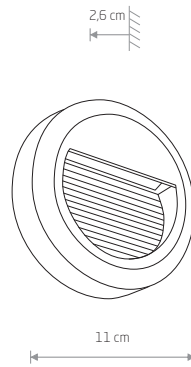

SIDEWALK ROUND LED
painted aluminum, plastic PC

8147




SIDEWALK SQUARE LED
painted aluminum, plastic PC

8148



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8147	1,6W LED	3000K	61 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP54	20000h
8148	1,6W LED	3000K	61 lm	120 °	≥80	~220-230V V, 50/60 Hz	⊕	>0,5	IP54	20000h




BASALT

painted aluminum, plastic

- 3412

4966
- 1xE14, max 60W

IP44




ASSAM

painted aluminum, glass, plastic

- 4453
- 1xE27, max 18W

IP65




INA

painted aluminum, glass, plastic

- 4907
- 1xE27, max 18W

IP65




STEP LED

painted aluminum, plastic

- 6907

6908
-



OIA LED

painted aluminum, plastic


- 9102

9103
-

cut out ø 40 mm



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9102 9103	1W LED	3000K	45 lm	49 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP20	10000h
6907	3W LED	3000K	120 lm	92 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,57	IP44	10000h
6908	3W LED	3000K	190 lm	92 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,57	IP44	10000h




PICCO LED S

aluminum

9106



cut out ø 38 mm
IP67




PAOLI

steel, glass

9554



1xGU10, max 10W
cut out ø 100 mm
IP67




MON LED

aluminum, glass

4454



cut out ø 64 mm
IP67




PICCO LED M

aluminum

9105



cut out ø 55 mm
IP67




PAT LED

aluminum, plastic PC

8162



cut out ø 56 mm
IP65




CIRCLLET LED

aluminum, plastic PC

8163



cut out ø 57 mm
IP65



PICCO LED L

aluminum








9104



cut out ø 65 mm
IP67

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9106	1W LED	3000K	47 lm	42 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP67	10000h
9105	1W LED	3000K	52 lm	51 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP67	10000h
9104	3W LED	3000K	130 lm	48 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,55	IP67	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
4454	2W LED	3000K	100 lm	28 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,42	IP67	10000h
8162	3W LED	3000K	12 lm	25 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP65	10000h
8163	3W LED	3000K	120 lm	47 °	≥80	~220-230 V, 50/60 Hz	⊕	>0,5	IP65	10000h



HANGING SET FOR PICNIC LED

aluminum, steel

8107 8106

Lampa bezprzewodowa, przenośna, zewnętrzna


- Podstawa ładująca w komplecie
- Akumulator litowy 2×2200 mAh
- Czas pełnego ładowania 5-8 h
- Czas pracy 12 h
- Włącznik dotykowy
- Ściemniacz

Wireless lamp, portable, outdoor

- Charging base (set incl.)
- 2×2200 mAh lithium battery
- Full charge time 5-8h
- Work time 12 h
- Touch switch
- Dimmable

Беспроводный светильник, переносной, уличный

- База для зарядки в комплекте
- Литиевая батарея 2×2200 mAh
- Время полной зарядки 5-8 ч
- Рабочее время 12 ч
- Сенсорный выключатель
- Диммер

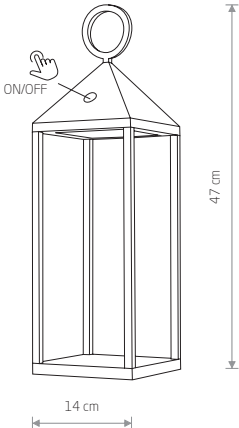

PICNIC LED

8178 8177

painted aluminum, plastic PC

47 cm

14 cm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
8177	2,2W LED	3000K	155 lm	46°	≥84	~220-230 V, 50/60 Hz	□	IP54	30000h
8178	2,2W LED	3000K	155 lm	46°	≥84	~220-230 V, 50/60 Hz	□	IP54	30000h



PICNIC LED 8177



MAHE LED 8397



Lampa bezprzewodowa, przenośna, zewnętrzna

- Ładowarka MICRO USB (w zestawie)
- Czas pełnego ładowania 5-7 h
- Czas pracy 9 h
- Włącznik dotykowy
- Ściemniacz

Wireless lamp, portable, outdoor

- Power adapter MICRO USB (set incl.)
- Full charge time 5-7 h
- Work time 9 h
- Touch switch
- Dimmable

Беспроводный светильник, переносной, уличный

- Зарядное устройство MICRO USB (в наборе)
- Время полной зарядки 5-7 ч
- Рабочее время 9 ч
- Сенсорный выключатель
- Диммер

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
8397	2,2W LED	3000K	168 lm	46 °	≥ 84	~220-230 V, 50/60 Hz		IP54	25000h
8398	2,2W LED	3000K	168 lm	46 °	≥ 84	~220-230 V, 50/60 Hz		IP54	25000h

WHITE

BLACK



FASTOON LIGHTS 6 M 7873



MAX 2000W MAX 80m CONNECTABLE

POWER CORD FOR
FESTOON LIGHTS
rubber cable

■ 7871
IP65

FESTOON LIGHTS 6M
rubber cable

■ 7873
● 10xE27, max 15W
IP65

FESTOON LIGHTS 9M
rubber cable

■ 7872
● 15xE27, max 15W
IP65



5 PC SET

BULB LED E27, A60 2W,
5 PC SET

glass
□ 7487