
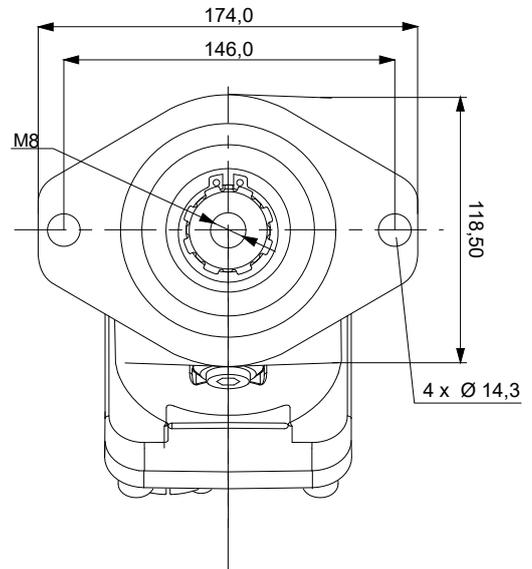



# 2PE 12 - SAE B - 2 BOLT

## SAE B 7/8" 13T-16/32DP


### SAE B - 2 BOLT MOUNTING (SAE J744)

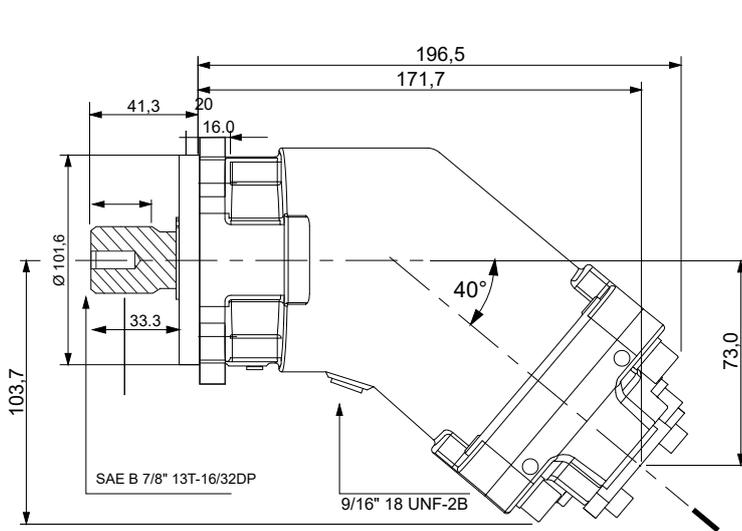


### Spline Shaft

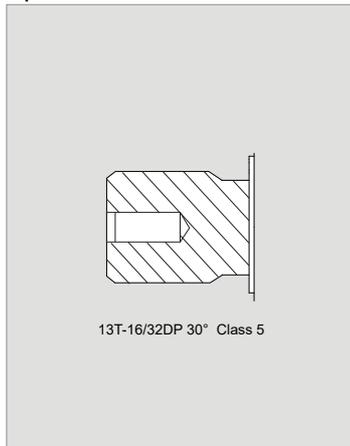

### Keyed Shaft

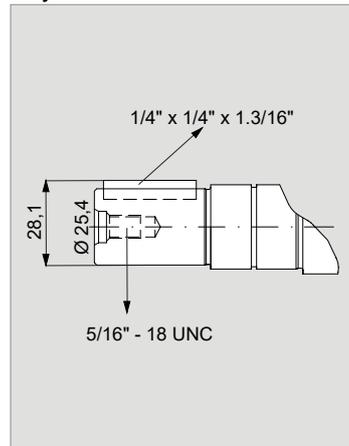


### Back Cover

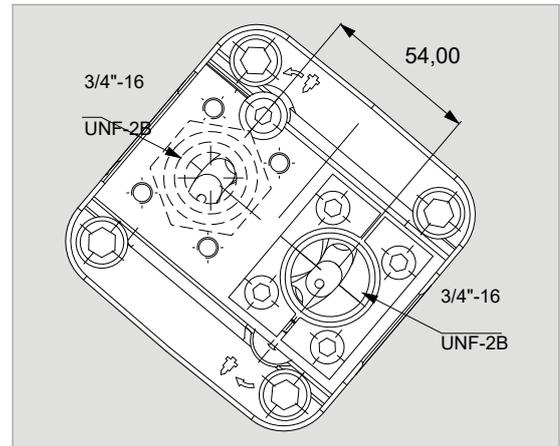

<b>x 1000 rpm</b>	12,00 cc
<b>x 1500 rpm</b>	18,00 cc
<b>Max. Continuous Pump Speed</b>	2300 rpm
<b>Max. Limited Pump Speed</b>	3100 rpm
<b>Max. Continuous Pressure</b>	350 bar
<b>Max. Intermit. Peak Pressure</b>	400 bar
<b>Max. Torque at 350 bar</b>	71 Nm
<b>Weight without inlet fitting</b>	10,00 kg
<b>Weight with inlet fitting</b>	10,40 kg
<b>Rotation</b>	CW-CCW



### Flow, Speed, Pressure List of 2PE 12

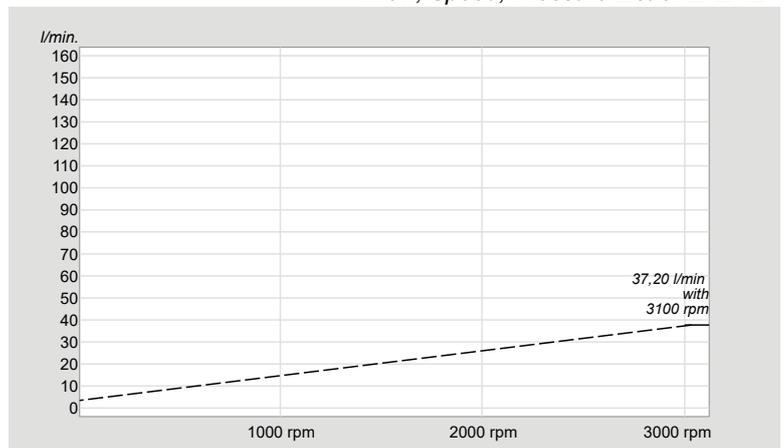


# 2PE 12 - SAE B - 6 BOLT

## SAE B 7/8" 13T-16/32DP


### SAE B - 6 BOLT MOUNTING (SAE J744)

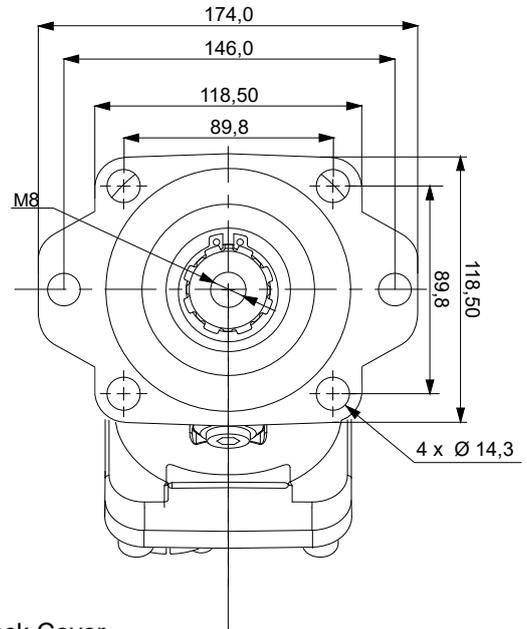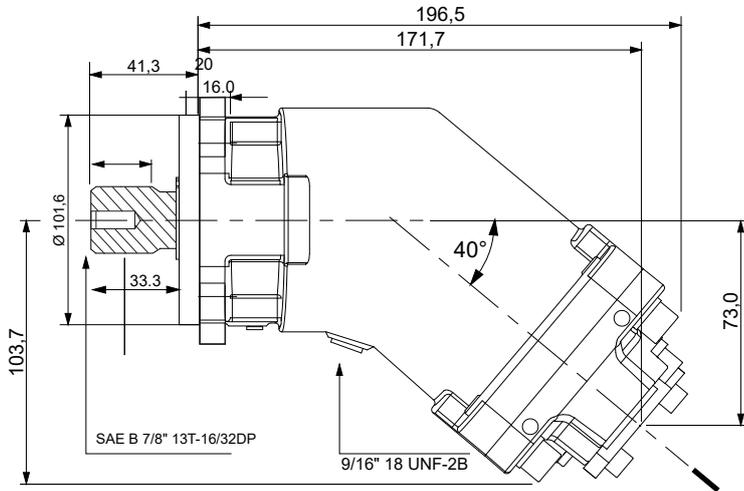


### Spline Shaft

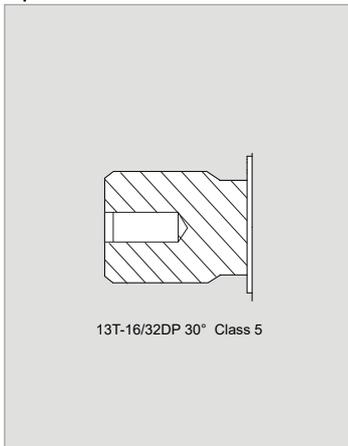

### Keyed Shaft

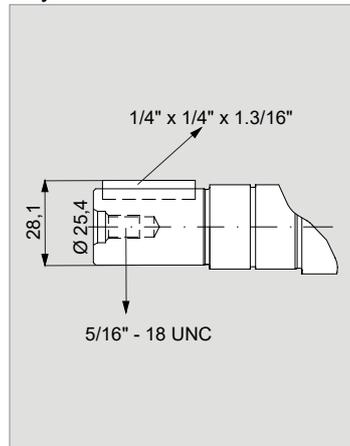

### Back Cover

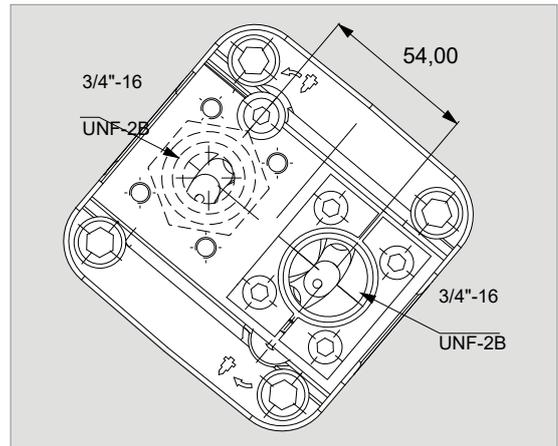

### Flow, Speed, Pressure List of 2PE 12

<b>x 1000 rpm</b>	12,00 cc
<b>x 1500 rpm</b>	18,00 cc
<b>Max. Continuous Pump Speed</b>	2300 rpm
<b>Max. Limited Pump Speed</b>	3100 rpm
<b>Max. Continuous Pressure</b>	350 bar
<b>Max. Intermit. Peak Pressure</b>	400 bar
<b>Max. Torque at 350 bar</b>	71 Nm
<b>Weight without inlet fitting</b>	10,00 kg
<b>Weight with inlet fitting</b>	10,40 kg
<b>Rotation</b>	CW-CCW

