

M12 male 0° field-wireable screw term.5-pol. max.0,75mm² 4-6mm

Male straight

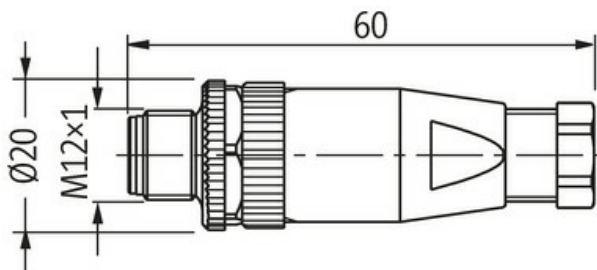
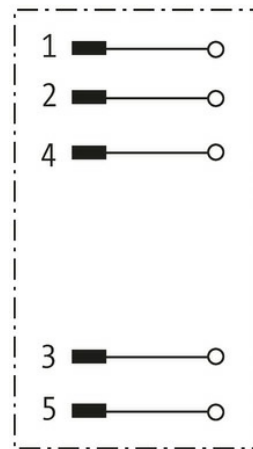
M12, 5-pole

Screw terminals


Sealing range (cable Ø): 4...6 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male



Product may differ from Image

**Form**

Form 12722

Technical Data

Operating voltage max. 60 V

Operating current per contact max. 4 A

No. of poles	5-pole
Coding	A-coded
Compression gland	M12 (0.6 Nm, SW18)
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	4...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Copper alloy
Isolation resistance	≥ 100 MΩ
Contact resistance	≤ 8 mΩ
Over voltage category	II

General data

Material (contact)	Copper alloy
Pollution Degree	3
Temperature range	-40...+85 °C
Material (housing)	PBT GF
Connection	Screw terminal

Commercial data

country of origin	CN
customs tariff number	85366990
EAN	4048879833905
eClass	27279221
Packaging unit	1.000