

FARMAX RC

FEATURES

- High lug angle at centre
- More overlap at centre

BENEFITS

- Better roadability
- Better stability

FEATURE

- Rounded shoulder

BENEFIT

- Soil and plant protection

FEATURE

- Deep tread pattern

BENEFIT

- Long service life




FEATURES

- D-Rated tyres with maximum speed up to 40 MPH
- Strong nylon carcass and strong bead

BENEFITS

- Better roadability even at higher speed
- Better lateral and radial stability
- Minimum chances of any mechanical failure

MACHINERY

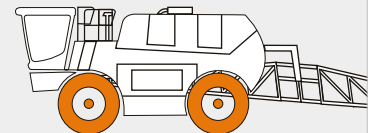

Sprayer

Size	Rim	Type	Infl tire dimension		Loaded Static Radius	Rolling Circumference	Load Index	Infl. Press	Recommend Load, kg (lbs)						
			SW	OD					Speed, km/h (mph)						
			mm/in	mm/in					mm/in	mm/in	speed symbol	bar psi	Field	10 6	25 16
320/90R54	W9 W10 W11	TL	325 12.8	1960 77.2	911 35.9	5880 231.5	153D/	0.8	1630	2130	1680	1550	1490	1420	1290
								12	3590	4690	3700	3410	3280	3130	2840
								1.6	2450	3200	2520	2330	2240	2130	1940
								23	5400	7050	5550	5130	4930	4690	4270
								2.4	3110	4050	3200	2960	2840	2700	2460
									6850	8920	7050	6520	6260	5950	5420
								3.2	3680	4800	3790	3500	3360	3200	2910
								46	8110	10570	8350	7710	7400	7050	6410
								4	4200	5480	4330	4000	3830	3650	3320
								58	9250	12070	9540	8810	8440	8040	7310