

PORT XL PLUS

TRA CODE: IND- 4.5

FEATURE

- Extra deep tread with higher base cover

BENEFIT

- Suitable for heavy duty application with higher mileage

FEATURE

- Higher under tread

BENEFIT


- Resistance to Puncture

FEATURE

- Specially formulated tread compound

BENEFIT

- Reduced heat built-up
Longer service life on concrete surface

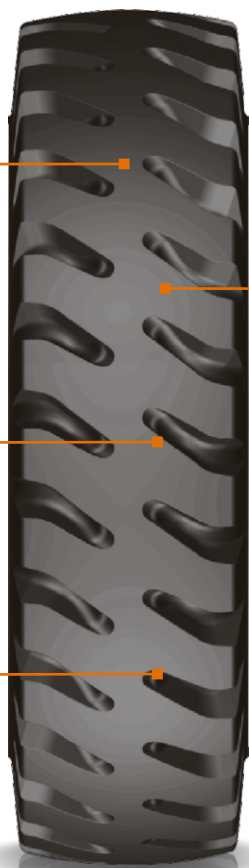

FEATURE

- Designed for reach stacker with strong nylon casing

BENEFIT

- High load carrying capacity


FEATURE

- Strong bead

BENEFIT

- Minimizing bead failure

MACHINERY



Reach Stacker

Size	Type	PR	Rim	Unloaded Dimensions		SLR	RC	Infl. Press	Load capacity						
				SW	OD				Speed kmph/ mph						
									mm	mm	Static	25	10	5	1
												15	5	3	0.6
in	in	Recommended load kg/ lbs													
18.00-25	TL	40	13	505	1680	768	4975	10	30600	21250	22950	24650	27200		
				19.9	66.2				30.2	195.9	145	67460	46845	50595	54345