




Indicative image

PLASTIC OPTICAL FIBRES

- Wide range of models: ultra slim for small object, long distances, spiral tube for handling
- Wide range of flexible fibre heads (with sleeve)
- Wide range of cutting fibre units
- P67 protection degree
- SSF - FS1 - FX3 - FX4 series connectable
- Approvals: CE

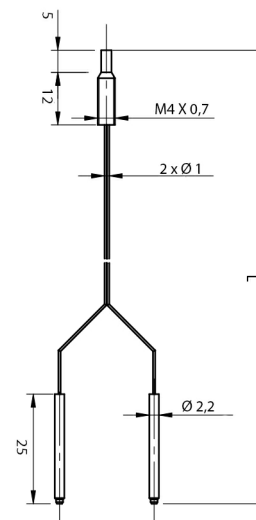

Detection properties

Distance with SSF	15 mm
Distance with FS1	15 mm
Distance with FX3	70 mm
Distance with FX4	110 mm
Distance with F1R	40 mm

Application

Function Principle	Diffuse reflection
Description	Plastic optical fibres
Optic position	Axial

Mechanical data

Operating temperature	-40°C....+70°C (posa fissa)
1	0,5
1 mm	0,5 mm

M4 con sleeve	M4
vetro, ETM, inox	PE, plastic
ottone nichelato	nickel-plated brass

Test/Approvals

Degree of protection IP67

Accessories

Accessories to be ordered separately AF/1A2 (fornito a corredo)

Generical Data

Operating Temperature -40°C....+70°C (posa fissa)

Mechanical Protection	IP67
-----------------------	------

Datasensing S.r.l.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@datasensing.com

date of printing

25/05/2022 10:50:29