



Bulbs


VIRIBRIGHT™ LED Bulbs are a direct replacement for 40-75W incandescent and 9-18W CFL bulbs and provides up to 85% energy savings over incandescent. With long life, low energy consumption, no hazardous mercury, VIRIBRIGHT™ LED Bulbs are setting the benchmark for price and performance.

Applications


- Desk Lamps
- Table Lamps
- Floor Lamps
- Sconce Fixtures
- Vanity Lighting Fixtures



10W LED BULB (E26/E27/B22)





Color Temp. (K)	Base	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	E26	73547		110-120VAC	> 0.8	Yes	270°	> 25,000 h
	E27	73538	820 lm	220-240VAC				
	B22	73541		220-240VAC				
4000 K	E26	73548		110-120VAC	> 0.8	Yes	270°	> 25,000 h
	E27	73539	900 lm	220-240VAC				
	B22	73542		220-240VAC				
6000 K	E26	73549		110-120VAC	> 0.8	Yes	270°	> 25,000 h
	E27	73540	900 lm	220-240VAC				
	B22	73543		220-240VAC				



8W LED BULB (E26/E27/E14/B22)




Color Temp. (K)	Base	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	E26	73422		110-120VAC	> 0.8	Yes	270°	> 25,000 h
	E27	73413	500 lm	220-240VAC				
	B22	73416		220-240VAC				
	E14	73419		220-240VAC				
4000 K	E26	73423		110-120VAC	> 0.8	Yes	270°	> 25,000 h
	E27	73414	650 lm	220-240VAC				
	B22	73417		220-240VAC				
	E14	73420		220-240VAC				
6000 K	E26	73421		110-120VAC	> 0.8	Yes	270°	> 25,000 h
	E27	73412	650 lm	220-240VAC				
	B22	73415		220-240VAC				
	E14	73418		220-240VAC				

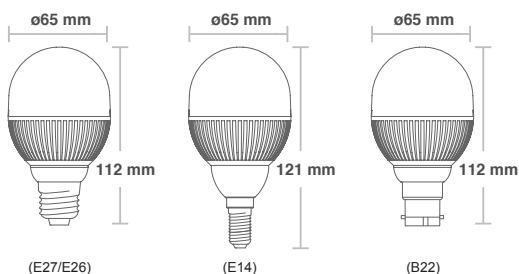




5W LED BULB-MINI (E26/E27/B22)



Color Temp. (K)	Base	Item No.	Lumen (lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	E26	73733		110-120VAC	> 0.85	Yes	270°	> 25,000 h
	E27	73724	400 lm	220-240VAC				
	B22	73727		220-240VAC				
4000 K	E26	73734		110-120VAC	> 0.85	Yes	270°	> 25,000 h
	E27	73725	450 lm	220-240VAC				
	B22	73728		220-240VAC				
6000 K	E26	73735		110-120VAC	> 0.85	Yes	270°	> 25,000 h
	E27	73726	450 lm	220-240VAC				
	B22	73729		220-240VAC				



5W LED BULB-MINI (E14)



Color Temp. (K)	Base	Item No.	Lumen (lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	E14	73730	400 lm	220-240VAC	> 0.85	Yes	270°	> 25,000 h
4000 K	E14	73731	450 lm	220-240VAC	> 0.85	Yes	270°	> 25,000 h
6000 K	E14	73732	450 lm	220-240VAC	> 0.85	Yes	270°	> 25,000 h

