

Vertical display cooler with hinged door



+2/+7°C


D

D



CR 1000
1100 x 716 x 2059
1060lt

CR 1300
1364 x 716 x 2059
1271lt

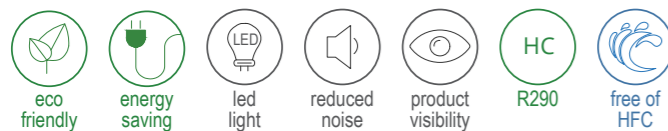

Advantages

- Ideal for the conservation and promotion of bottled and packed products.
- Top cooling capacity ideal for perishable products.
- Selected by leading companies in the dairy and beverage sector
- Ideal for heavy duty and outdoors use
- Shelving solutions suitable for each customer's needs
- Reliable and functional
- Optimum product visibility
- Plug ready



Basic Equipment

- Hi efficiency compressor
- Digital controller
- EMD - Energy Management Device
- EBD electronic fan motor (evaporator)
- Self closing doors
- Internal LED lighting
- Operation switch
- Four castors
- 10 Adjustable reinforced shelves
- Special antidazzle double glass
- Easily removable grill
- Air cooled condenser
- Two regulators
- Automatic defrost
- Drainage
- Internal body from non toxic pre painted steel sheet



Optional Equipment

- Shelves
- Product labeling and price tags
- EBD electronic fan motor (compressor)
- Branding



Technical Specifications

| TECHNICAL SPECIFICATIONS | UNITS | CR 1000 | CR 1300 |
|-------------------------------|-------|-------------------|-------------------|
| External dimensions (lxwxh) | mm | 1100 x 716 x 2059 | 1364 x 716 x 2059 |
| Internal dimensions (lxwxh) | mm | 1020 x 606 x 1634 | 1284 x 606 x 1634 |
| Packing dimensions (lxwxh) | mm | 1116 x 752 x 2145 | 1380 x 752 x 2145 |
| Internal gross volume | lt | 1060 | 1271 |
| Capacity of 330ml cans | pcs | 1020 | 1659 |
| Temperature range | °C | +2 / +7 | +2 / +7 |
| Gross / net weight | kg | 170 / 160 | 187 / 175 |
| Climate class | - | CC2/K4 | CC2/K4 |
| Pieces per truck 13.6m | - | 36 | 28 |
| Pieces per 20/40'ft container | - | 15 / 30 | 12 / 25 |
| Refrigeration | - | AIR COOLED | AIR COOLED |
| Refrigerant | - | R290 | R290 |

*The energy consumption concerns specific metrics