


SR-BUS LED Controller

Advanced wireless transmission protocol

Two-way communication transmission reliability

Mesh network, Data transmission farther and more stable

RF data AES encryption

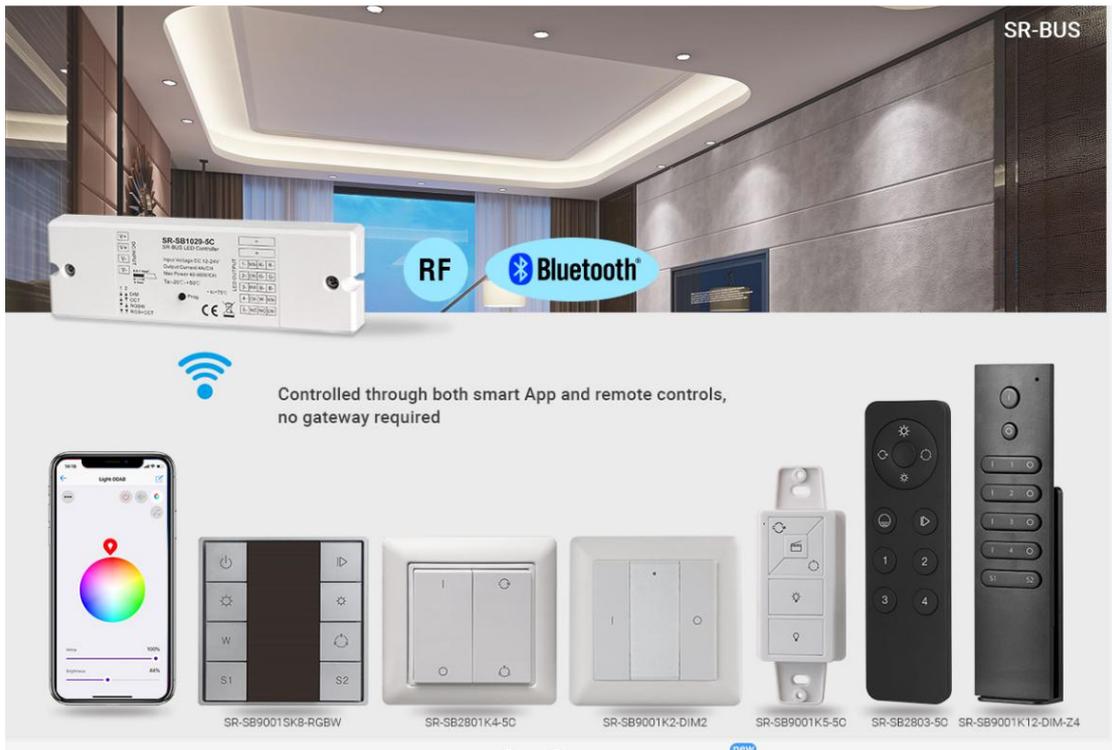


All the different remotes in the picture both can work with the same receiver SR-SB1029-5C
 And the receiver SR-SB1029-5C also can be controller by bluetooth from the App. App name "easythings"



SR-BUS

4 in 1 Universal LED Controller

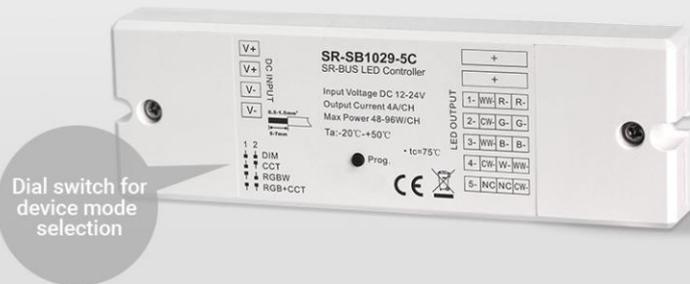

Dial switch for device mode selection



SR-BUS



VS



- | | | |
|-------------------------------------|--|--------------------------|
| <input checked="" type="checkbox"/> | Controlled through both smart App and remote controls, no gateway required | <input type="checkbox"/> |
| <input checked="" type="checkbox"/> | Mesh network, transmits received signal to neighbor devices | <input type="checkbox"/> |
| <input checked="" type="checkbox"/> | Encrypted two-way communication, quick status feedback | <input type="checkbox"/> |
| <input checked="" type="checkbox"/> | Easy & quick pairing to the smart App by scanning QR code | <input type="checkbox"/> |



SR-BUS=Advanced wireless transmission protocol

SR-BUS



Self-powered SR-BUS wall remote
No wires, no batteries, no limits



Core module, precision structure design
more than 1 million times pushing

SR-BUS LED Controller

Advanced wireless
transmission protocol

Two-way communication
transmission reliability

Mesh network, Data
transmission farther
and more stable

RF data
AES encryption



SR-BUS



Controlled through both smart App and remote controls,
no gateway required



SR-BUS



Size-45.5x45x20.3mm

Universal AC Phase Dimmer Module

Trailing edge /leading edge dimming



Incandescent lamp



LED lamp



Halogen lamp

Max 400W

Mini size ,Powerful function



1 million times

Self-powered SR-BUS wall remote, no battery replacement & re-installation costs

Ultra long lifetime, more than 1 million times pushing



No wires, no batteries, no limits



Each remote can control numerous receivers



Ultra powerful to control DIM CCT RGBW RGB+CCT receivers

- Easy & quick pairing to the SR-BUS receivers by simply pushing the buttons
- Mesh network for further control distance, receivers can transmit signal to each other
- Each receiver can be paired to max. 8 remote controls
- Standard size, compatible with existing EU size frame