



WPC58/WPCB58 Thermal Receipt Printer

- High speed printing,max speed up to 120mm/s
- Auto Cutter and sawtooth
- Support NV LOGO download and printing
- Support multiple interfaces:USB;Parallel;USB+Bluetooth
- Colorful decorative strip of the printer looks sharp
- Support multiple languages and code pages



Store



Hospital



Café





Logistics





WPC58/WPCB58

Thermal Receipt Printer

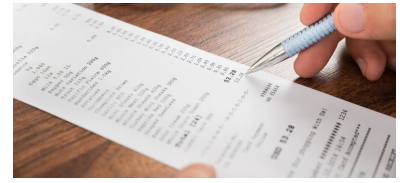

Printing	WPC58	WPCB58
Printing method	Direct thermal	
Printer width	58mm	
Column capacity	384 dots/line	
Printing speed	120mm/s	
Interface	USB / Parallel	USB+Bluetooth
Printing paper	57.5±0.5mm x φ60mm	
Line spacing	3.75mm(Adjustable by commands)	
Print command	ESC/POS	
Column number	58mm paper: Font A - 32 columns Font B - 42 columns Chinese, Traditional Chinese - 16 columns	
Character size	ANK, Font A: 12×24 dots Font B: 9×17 dots Simplified/Traditional Chinese: 24x24 dots	
Barcode Character		
Extension character sheet	PC347(Standard Europe)/Katakana/PC850(Multilingual)/PC860(Portuguese)/PC863(Canadian-French)/PC865(Nordic)/West Europe/Greek/Hebrew/East Europe/Iran/WPC1252/PC866(Cyrillic#2)/PC852(Latin2)/PC858/IranII/Latvian/Arabic/PT151(1251)	
Barcode types	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128	
Buffer		
Input buffer	32Kbytes	
NV Flash	64Kbytes	
Power		
Power adaptor	Input: AC 110V/220V, 50~60Hz	
Power source	Output: DC 12V/2.6A	
Cash drawer output	DC 12V/1A	
Physical characteristics		
Weight	0.8 KG	
Dimensions	169.95(D)×120(W)×119.92(H)mm	
Environmental Requirements		
Work environment	Temperature (0~45°C) humidity(10~80%)	
Storage environment	Temperature(-10~60°C) humidity(10~90%)	
Reliability		
Printer head life	50KM	
Cutter life	0.5 million cuts	
Driver	Windows/Linux	



Guangzhou Winprt Technology Co., Ltd.
Address: Room 614, NO.80 JinGang Road,
Nansha District, Guangzhou, Guangdong, China.
<http://www.winprt.com>
Email:overseas@winprt.com

