

VOLTAGE RANGE: 100 --- 600 V
CURRENT: 1.0 A



Features

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-214AC, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.002 ounces, 0.064 grams
- ◇ Mounting position: Any

DO - 214AC(SMA)

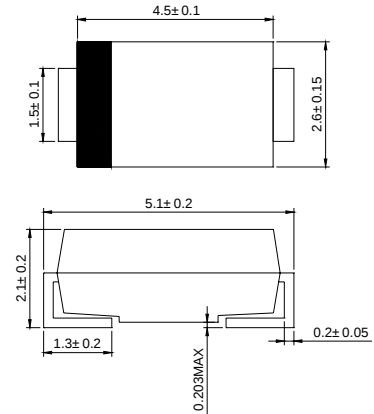

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ER1A	ER1B	ER1C	ER1D	ER1E	ER1G	ER1H	ER1J	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	500	600	V
Maximum average forw ard rectified current @T _A =75°C	I _{F(AV)}	1.0								A
Peak forw ard surge current 8.3ms single half-sine-wave superimposed on rated load @T _J =125°C	I _{FSM}	30.0								A
Maximum instantaneous forw ard voltage @ 1.0A	V _F	0.95				1.25		1.7		V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R	5.0 100								μ A
Maximum reverse recovery time (Note 1)	t _{rr}	35								ns
Typical junction capacitance (Note 2)	C _J	22								pF
Typical thermal resistance (Note 3)	R _{θJA}	50								°C/W
Operating junction temperature range	T _J	- 55 ----- + 150								°C
Storage temperature range	T _{STG}	- 55 ----- + 150								°C


 NOTE: 1. Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $t_{rr} = 0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


3. Thermal resistance junction to ambient.

Ratings AND Characteristic Curves

FIG.1 -- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES:1.RISE TIME = 7ns MAX.INPUT IMPEDANCE = 1MΩ.22pF.
2.RISE TIME =10ns MAX.SOURCE IMPEDANCE=50 Ω.



SET TIME BASE FOR 10/20 ns/cm

FIG.2 -- TYPICAL FORWARD CHARACTERISTIC

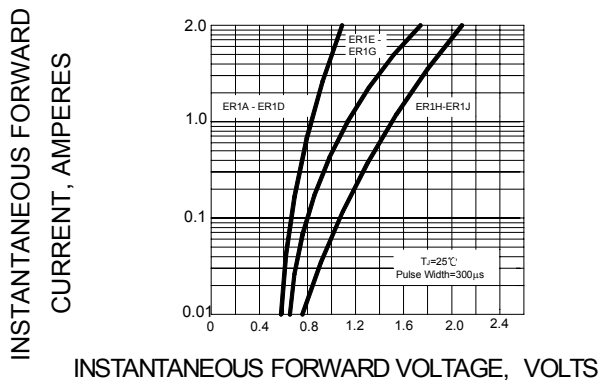


FIG.3 -- FORWARD DERATING CURVE

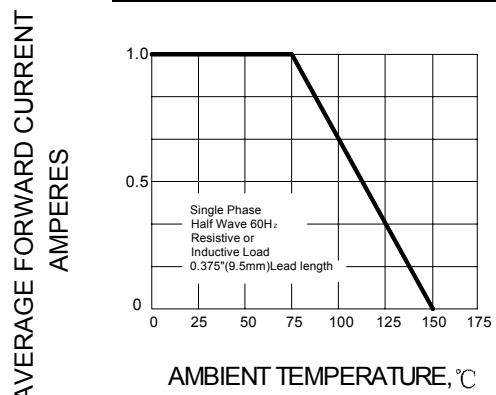


FIG.4 -- TYPICAL JUNCTION CAPACITANCE

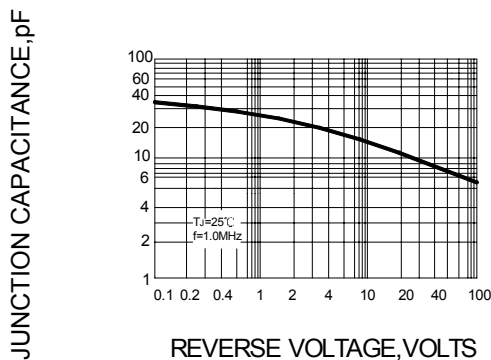


FIG.5 -- PEAK FORWARD SURGE CURRENT

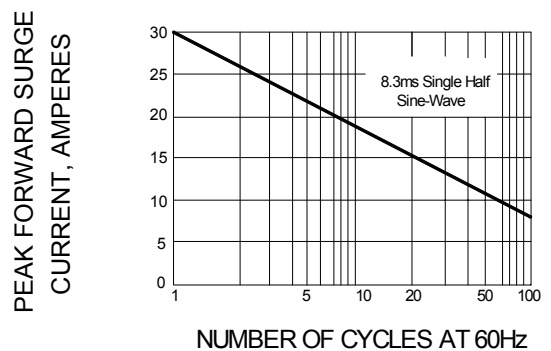


FIG.6 -- TYPICAL REVERSE CHARACTERISTICS

