

EMX55CLC



ENGINEERING CODE
701PA77

REFRIGERANT
R-600a

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
LBP

MOTOR TYPE
RSCR

STANDARD
EN12900

COOLING CAPACITY
79 W

EFFICIENCY
1.29 W/W



DATA

GENERAL DATA

Model	EMX55CLC
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube
Compressor Cooling	Static/220
Starting Torque	LST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	16.55 Ω at 25°C
Run Winding Resistance	25.0 Ω at 25°C

MECHANICAL DATA

Displacement	9.04 cm ³
Oil Charge	150 ml
Oil Type	ALQUILB
Oil Viscosity	ISO5
Weight	7.6 Kg

ELECTRICAL COMPONENTS

CSR CSIR BOX	No
Overload Protection	AE18BQX

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	YES

Connector	Internal Diameter	Shape	Material
Suction	6.1 mm	SLANTED 42° UP + 45° TO BACK	COPPER
Discharge	4.94 mm	SLANTED 0° UP + 45° TO BACK	COPPER
Process	6.1 mm	SLANTED 45° UP + 45° TO BACK	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-600a
Tested Application	LBP
Tested Standard	EN12900
Tested Cooling	Static
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	150 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
40	-35	79	1.29	62	-	0.97

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-35	84	1.36	62	-	0.99
-30	112	1.57	71	-	1.31
-25	147	1.81	81	-	1.72
-20	188	2.09	90	-	2.21
-15	238	2.42	98	-	2.79
-10	296	2.81	106	-	3.49

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-35	74	1.20	61	-	0.94
-30	99	1.38	72	-	1.27
-25	131	1.56	84	-	1.67
-20	169	1.77	95	-	2.15
-15	213	1.99	107	-	2.73
-10	266	2.25	118	-	3.42

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	85	1.18	72	-	1.20
-25	114	1.34	85	-	1.60
-20	148	1.50	98	-	2.08
-15	188	1.66	113	-	2.65
-10	235	1.84	127	-	3.33

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.


PERFORMANCE CURVE

Condensing Temperature 65°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-25	95	1.12	85	-	1.50
-20	125	1.26	100	-	1.98
-15	161	1.39	116	-	2.54
-10	202	1.52	133	-	3.21

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

ENVELOPE

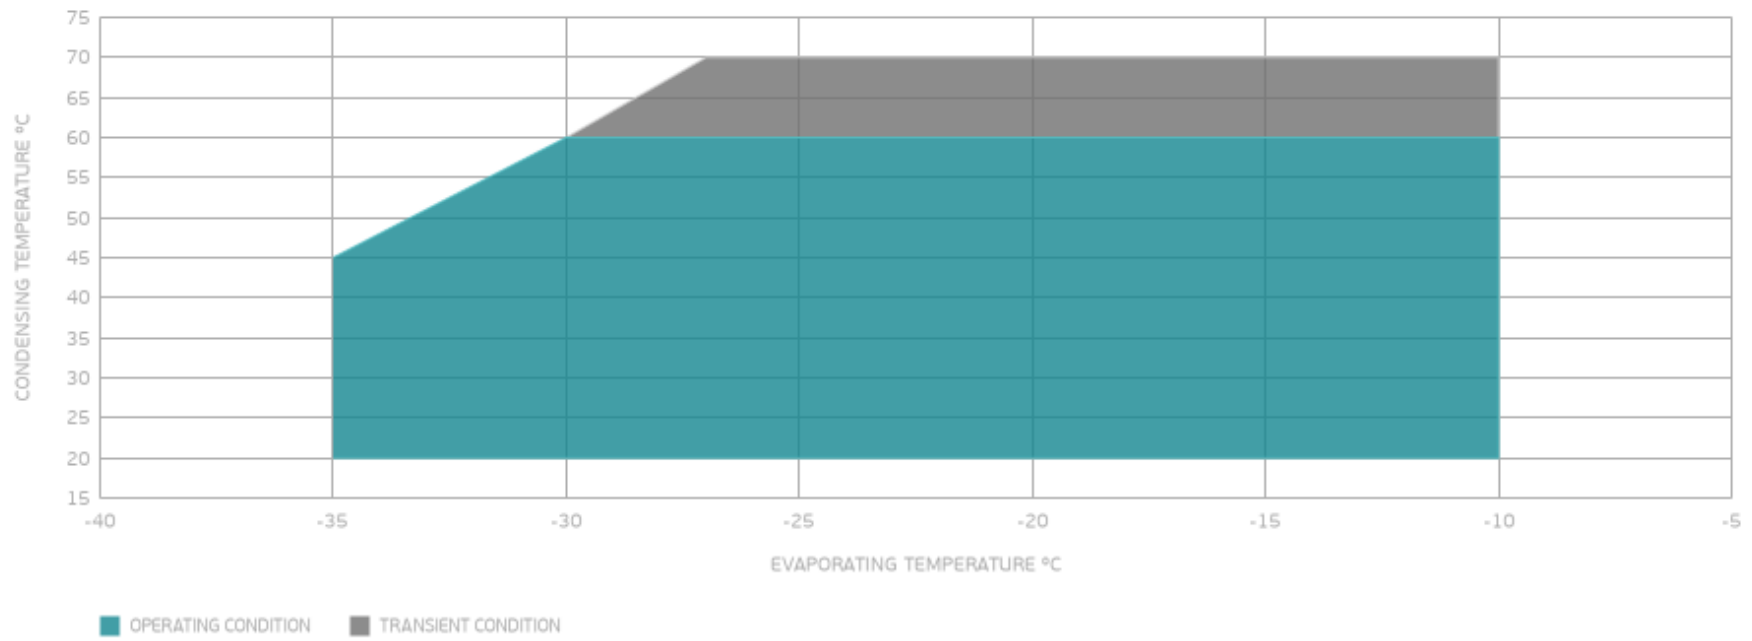

EXTERNAL DIMENSIONS

