

PDCH 55C
PDCH 45C



C-LINE

Lifting equipment

EN → Electro-hydraulic two post lifts with top connections.
Possibility of installation in symmetrical or asymmetric version.



Electro-hydraulic two post lifts with top connections. Possibility of installation in **symmetrical** or **asymmetric** version. Realignment of the two carriages using metal cables that guarantee excellent synchronisation.

Standard height of two-post connection: 4,050 mm.

Available versions (with optional column extension set):

- **V**: Specific for vans (Height of two-post connection: 4,620 mm).
- **XV**: Specific for vans and very high vehicles, extra-high version (Height of two-post connection: 5,220 mm).



- 1 **Internally reinforced column structure** for little bending and internal cable guiding.
- 2 **Electro magnet** safety release **24V**.
- 3 Rubber door protections. **Toothed sector arm** rotation stop system.
- 4 Four **three-section symmetrical** arms.



EN Supplied accessories

All models complete with:

- ✓ Safety stop-bar included as standard.
- ✓ Two set of extension pads.

EN Optional accessories



EN Technical Data

Model	PDCH 55C	PDCH 45C
Lift capacity	5500 kg	4500 kg
Lifting time	45 s	
Three phase motor	400/230V - 3kW - 3Ph - 50/60Hz	
Single phase motor	230V - 3kW - 1Ph - 50/60Hz	
Max. lifting height	2080 mm	
Max. locking position	1957 - 2037 mm	
Lift minimum height	100 mm	
Height connection	4050/4620/5520 mm	

A Column extension set


B 8-43300021 Set of 4 extension for pads, H=35 mm

C 8-43300014 Set of 4 extension for pads, H=80 mm

D 8-43300015 Set of 4 extension for pads, H=140 mm

E 8-43300016 Set of 4 adapters for Mercedes Sprinter

EN Overall Dimensions

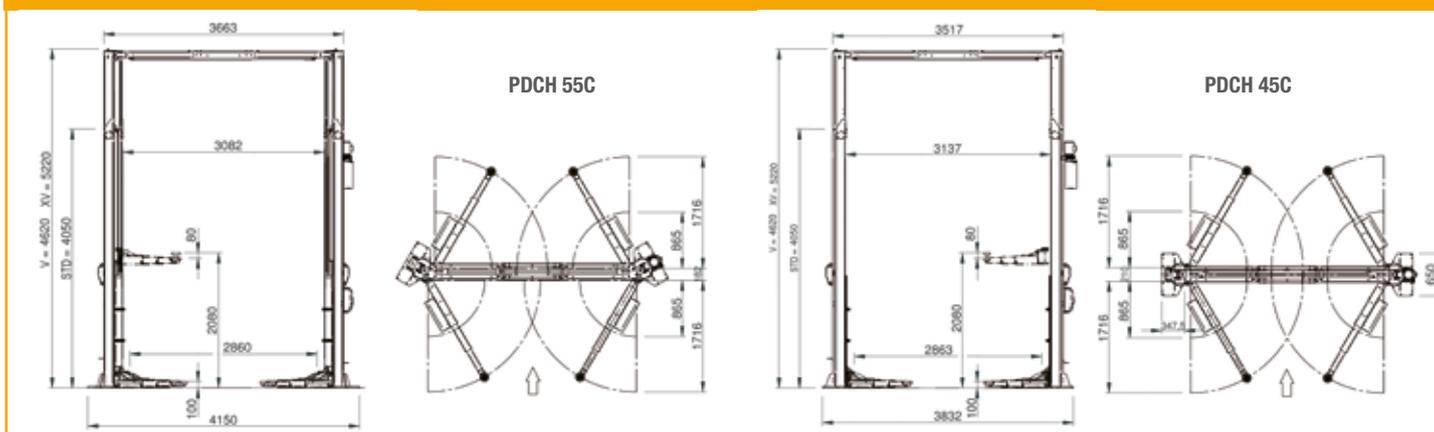

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPSC000467 - 07/2021



NEXION SPA - ITALY
www.sice.it - sice@sice.it

Designed in
ITALY

