


Vertical display freezers [ventilated] with auto defrost




-15/-25°C 

D



CRFV 1200
1370 x 760 x 2080
1163lt

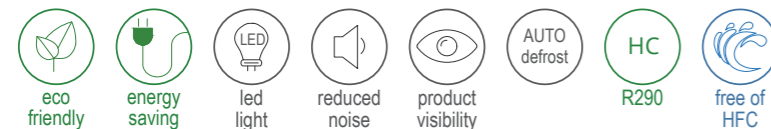

Advantages

- High aesthetics
- Ideal for promoting frozen products
- Selected by leading companies in the ice cream sector
- Maximum use of limited spaces
- Large display area optimum product promotion
- Robust for heavy duty-use
- Plug ready



Basic Equipment

- Two Hi efficiency compressors
- Ventilated refrigeration
- Digital controller
- Automatic fan switch off with door opening.
- High temperature alarm
- Automatic defrost
- 10 adjustable reinforced shelves + floor selve
- Internal LED light
- Operation switch
- Antidazzle triple glass door
- Two regulators
- Four castors
- Self closing door
- Easily removable grille
- Air cooled condenser
- Internal body from non toxic pre-painted steel sheet



Optional Equipment

- Shelves
- Maintenance free condenser
- EBD electronic fan motor (compressor)
- Branding



Technical Specifications

TECHNICAL SPECIFICATIONS	UNITS	CRFV 1200
External dimensions (lxwxh)	mm	1370 x 760 x 2080
Internal dimensions (lxwxh)	mm	1248 x 585 x 1593
Packing dimensions (lxwxh)	mm	1380 x 780 x 2180
Internal gross volume	lt	1163
Temperature range	°C	-15 / -25
Gross / net weight	kg	197 / 185
Climate class	-	4L1
Pieces per truck 13.6m	-	28
Pieces per 20/40'ft container	-	12 / 25
Refrigeration	-	AIR COOLED
Refrigerant	-	R290

*The energy consumption concerns specific metrics