


Relief P to T

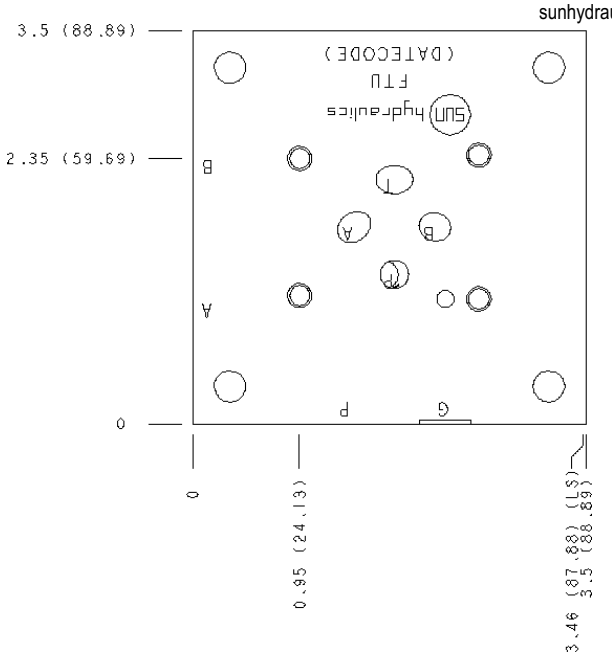

TECHNICAL DATA

Body Type	Subplate
Interface	ISO 03
Body Features	P to T, manifold T port

NOTES

- This subplate is designed to mount to the top of a reservoir. Tank is an NPTF port to accommodate a down pipe to drop the connection below the oil level. The tank port and mounting holes are supplied with O rings to seal to the mounting surface.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
FTU, /V	Ports A, B, P: 3/8" BSPP; Port T: 3/8" NPTF; Gage Port: 1/4" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
500-001-123	O-Ring	1

CONFIGURATION OPTIONS
Model Code Example: FTU

MODIFIER

6061-T651 Aluminum, Buna-N
/S 65-45-12 Ductile Iron, Buna-N, Blackened
/V 6061-T651 Aluminum, Viton
/Y 65-45-12 Ductile Iron, Viton, Blackened

© 2019 Sun Hydraulics