

MODEL
CXED

Free flow side to nose check valve
SERIES 2 / CAPACITY: 30 gpm / CAVITY: T-5A

sunhydraulics.com/model/CXED



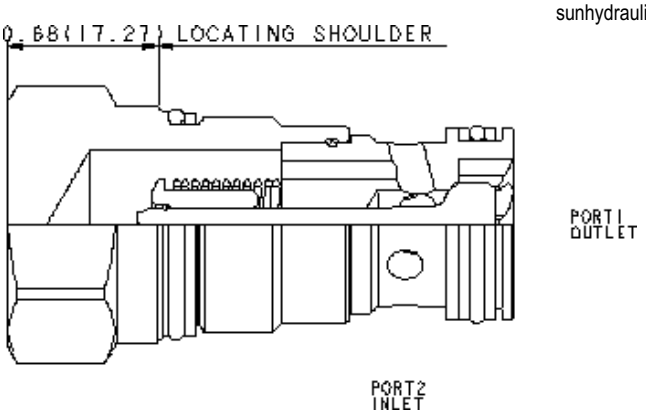

CONFIGURATION

X	Control	Not Adjustable
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

Free-flow, side-to-nose check valves are on/off circuit components that allow free flow from the inlet (port 2) to the outlet (port 1) and block flow in the opposite direction.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.
Seal kit - Cartridge	Buna: 990203007
Seal kit - Cartridge	Viton: 990203006

CONFIGURATION OPTIONS

Model Code Example: CXEDXCN

CONTROL (X)

- **X** Not Adjustable

CRACKING PRESSURE (C)

- **C** 30 psi (2 bar)
- **A** 4 psi (0,3 bar)
- **B** 15 psi (1 bar)
- **D** 50 psi (3,5 bar)
- **E** 75 psi (5 bar)
- **F** 100 psi (7 bar)

SEAL MATERIAL (N)

- **N** Buna-N
- **E** EPDM
- **V** Viton

MATERIAL/COATING

- Standard Material/Coating
- **/AP** Stainless Steel, Passivated
- **/LH** Mild Steel, Zinc-Nickel

© 2019 Sun Hydraulics