

MODEL
CWIA

3:1 pilot ratio, vented counterbalance valve
SERIES 4 / CAPACITY: 120 gpm / CAVITY: T-24A

sunhydraulics.com/model/CWIA



4-Port Vented

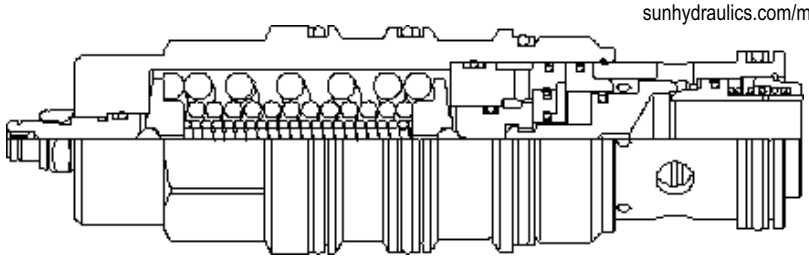

Vented counterbalance valves with pilot assist are meant to control an overrunning load. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio. Backpressure at port 2 does not affect the valve setting because the spring chamber references the vent (port 4).

Other names for this valve include motion control valve and over-center valve.

CONFIGURATION

L	Control	Standard Screw Adjustment
H	Functional Setting Range	1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Pilot Ratio	3:1
Maximum Recommended Load Pressure at Maximum Setting	3075 psi
Maximum Setting	4000 psi
Factory Pressure Settings Established at	2 in³/min.
Maximum Valve Leakage at Reseat	5 drops/min.
Check Cracking Pressure	20 psi
Adjustment - No. of CCW Turns from Min. to Max. Setting	5
Reseat	>85% of setting
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990024007
Seal kit - Cartridge	Polyurethane: 990024002
Seal kit - Cartridge	Viton: 990024006

CONFIGURATION OPTIONS

Model Code Example: CWIALHN

CONTROL (L)

- **L** Standard Screw Adjustment
- **C** Tamper Resistant - Factory Set

FUNCTIONAL SETTING RANGE (H)

- **H** 1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) Standard Setting
- **I** 400 - 1500 psi (28 - 105 bar), 1000 psi (70 bar) Standard Setting

SEAL MATERIAL (N)

- **N** Buna-N
- **E** EPDM
- **V** Viton

MATERIAL/COATING

- Standard Material/Coating
- **/AP** Stainless Steel, Passivated
- **/LH** Mild Steel, Zinc-Nickel

© 2020 Sun Hydraulics