

MODEL
CODA

Pilot-to-close check valve
SERIES 1 / CAPACITY: 20 gpm / CAVITY: T-11A

sunhydraulics.com/model/CODA



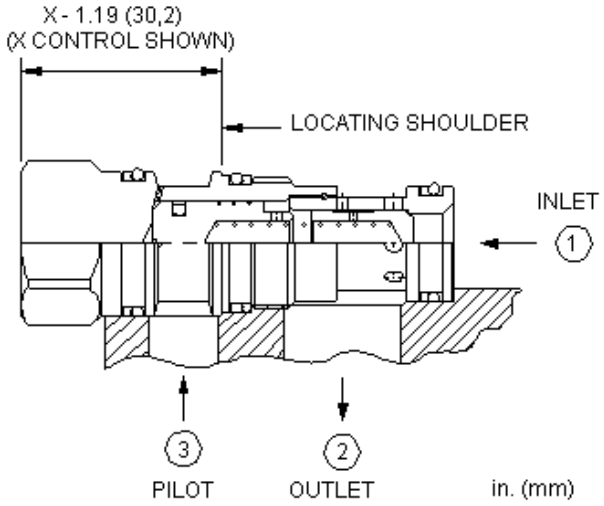

CONFIGURATION

X	Control	Standard Pilot
Z	Cracking Pressure	1 psi (0,07 bar)
N	Seal Material	Buna-N
(none)	Material/Coating	

This valve is a spring biased closed, pilot-to-close check cartridge that has a 1.8:1 pilot ratio. The valve allows flow from port 1 to port 2 and blocks reverse flow. Pressure at the pilot port opposes pressure at port 1 at a ratio of 1.8:1. This valve is most often used in regeneration circuits.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Pilot Ratio	1.8:1
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.
Seal kit - Cartridge	Buna: 990011007
Seal kit - Cartridge	EPDM: 990011014
Seal kit - Cartridge	Polyurethane: 990011002
Seal kit - Cartridge	Viton: 990011006

CONFIGURATION OPTIONS

Model Code Example: CODAXZN

CONTROL (X)	CRACKING PRESSURE (Z)	SEAL MATERIAL (N)	MATERIAL/COATING
X Standard Pilot	**Z** 1 psi (0,07 bar)	**N** Buna-N	Standard Material/Coating
	A 4 psi (0,3 bar)	**E** EPDM	**/AP** Stainless Steel, Passivated
	B 15 psi (1 bar)	**V** Viton	**/LH** Mild Steel, Zinc-Nickel
	C 30 psi (2 bar)		
	D 50 psi (3,5 bar)		
	E 75 psi (5 bar)		
	F 100 psi (7 bar)		
	G 150 psi (10,5 bar)		

© 2023 Sun Hydraulics