




Counterbalance, On A and B, Cross-Piloted



Pilot Operated Check, On A and B, Cross-Piloted




Reducing, On A and B drained to opposite port



Reducing/Relieving, On A and B drain to opposite port



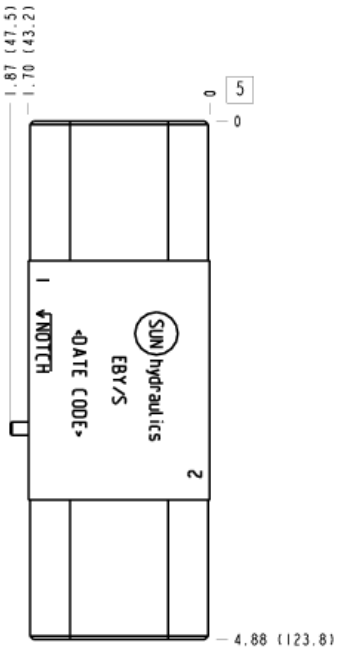

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	On A and B with cross pilot
Stack Height	1.75 in.
Seal Plate Included (see notes)	Yes

CONFIGURATION

/S	Modifier	65-45-12 Ductile Iron, Buna-N, Chem. Black

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1
850-004-250	Plug	2

CONFIGURATION OPTIONS
Model Code Example: EBY/S

MODIFIER (/S)

/S 65-45-12 Ductile Iron, Buna-N, Chem. Black

6061-T651 Aluminum, Buna-N

/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/V 6061-T651 Aluminum, Viton

/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I

© 2023 Sun Hydraulics

/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II

/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

/Y 65-45-12 Ductile Iron, Viton, Chem. Black

/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

© 2023 Sun Hydraulics